MIAMI-DADE COUNTY
PRODUCT CONTROL SECTION
11805 SW 26 Street, Room 208
Miami, Florida 33175-2474
T (786) 315-2590 F (786) 315-2599
www.miamidade.gov/economy

DEPARTMENT OF REGULATORY AND ECONOMIC RESOURCES (RER)
BOARD AND CODE ADMINISTRATION DIVISION

NOTICE OF ACCEPTANCE (NOA)

PGT Industries, LLC
3400 Precision Drive,
North Venice, FL 34275

SCOPE:
This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER -Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction (AHJ).
This NOA shall not be valid after the expiration date stated below. The Miami-Dade County Product Control Section (In Miami Dade County) and/or the AHJ (in areas other than Miami Dade County) reserve the right to have this product or material tested for quality assurance purposes. If this product or material fails to perform in the accepted manner, the manufacturer will incur the expense of such testing and the AHJ may immediately revoke, modify, or suspend the use of such product or material within their jurisdiction. RER reserves the right to revoke this acceptance, if it is determined by Miami-Dade County Product Control Section that this product or material fails to meet the requirements of the applicable building code.
This product is approved as described herein and has been designed to comply with the Florida Building Code, including the High Velocity Hurricane Zone.

DESCRIPTION: Series "770HP" Aluminum Sliding Glass Doors w / Reinforcements & 90°/135°corners-LMI

APPROVAL DOCUMENT: Drawing No. **PGT0004 Rev J**, titled "Series 770 H.P. Aluminum SGD-LMI", sheets 1 through 10 of 10, prepared by manufacturer, dated 08/05/07 and last revised on 12/20/24, signed and sealed by Lynn Miller, P.E., bearing the Miami-Dade County Product Control Renewal stamp with the Notice of Acceptance number and expiration date by the Miami-Dade County Product Control Section.

MISSILE IMPACT RATING: Large Missile Impact Resistant
Limitations:

1. See tables **1& 1A** in sheet **4** of this approved drawing set for applicable SGD unit sizes, design pressures, reinforcements, glass types, sill riser and anchors requirements. See approved configurations in sheet **2**.
2. Applicable operable door Egress min clear width & height requirements must comply per FBC, to be reviewed by Building official.
3. See glazing options G4, G4A, G6 and G6A in sheet **3**

LABELING: Each unit shall bear a permanent label with the manufacturer's name or logo, city, state and series and following statement: "Miami-Dade County Product Control Approved", unless otherwise noted herein.

RENEWAL of this NOA shall be considered after a renewal application has been filed and there has been no change in the applicable building code negatively affecting the performance of this product.

TERMINATION of this NOA will occur after the expiration date or if there has been a revision or change in the materials, use, and/or manufacture of the product or process. Misuse of this NOA as an endorsement of any product, for sales, advertising or any other purposes shall automatically terminate this NOA. Failure to comply with any section of this NOA shall be cause for termination and removal of NOA.

ADVERTISEMENT: The NOA number preceded by the words Miami-Dade County, Florida, and followed by the expiration date may be displayed in advertising literature. If any portion of the NOA is displayed, then it shall be done in its entirety.

INSPECTION: A copy of this entire NOA shall be provided to the user by the manufacturer or its distributors and shall be available for inspection at the job site at the request of the Building Official.

This NOA **revises & renews NOA # 23-0710.05** (PGT Industries, Inc.) and consists of this page 1 and evidence pages E-1, E-2, E-3, E-4, E-5 & E-6, as well as approval document mentioned above.
The submitted documentation was reviewed by **Ishaq I. Chanda, P.E.**

Ishaq I. Chanda

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

1. Evidence submitted under previous approvals

A. DRAWINGS

1. Manufacturer's die drawings and sections (Submitted under files **# 11-1018.16/#09-0826.12**).
2. Drawing No. **PGT0004 Rev D**, titled "Series 770 H.P. Aluminum SGD-LMT", sheets 1 through 10 of 10, prepared by manufacturer, dated 08/05/07 and last revised on 02/13/14, signed and sealed by Lynn Miller, P.E.

B. TESTS

1. Test report on 1) Air Infiltration Test, per FBC, TAS 202-94
   2) Uniform Static Air Pressure Test, per FBC, TAS 202-94
   3) Water Resistance Test, per FBC, TAS 202-94.
   4) Large Missile Impact Test per FBC, TAS 201-94
   5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
   6) Forced Entry Test, per FBC 2411.3.2.1 (b) and TAS 202-94

Along with marked-up drawings and installation diagram of Aluminum Sliding Glass Doors(Samples A-1, A-2, B-1, B-2 and C-1), prepared by Fenestration Testing Laboratory, Inc., Test Report No **FTL-7468,** dated 09/13/2013, all signed and sealed by Martin D. Brinson, P.E.

Note: This test report has addendum letter dated Jan 13, 2014, issued by Fenestration Testing Lab.

2. Test report on 1) Air Infiltration Test, per FBC, TAS 202-94
   2) Uniform Static Air Pressure Test, per FBC, TAS 202-94
   3) Water Resistance Test, per FBC, TAS 202-94.
   4) Large Missile Impact Test per FBC, TAS 201-94
   5) Cyclic Wind Pressure Loading per FBC, TAS 203-94
   6) Forced Entry Test, per FBC 2411.3.2.1 (b) and TAS 202-94

Along with marked-up drawings and installation diagram of Aluminum Sliding Glass Doors, prepared by Fenestration Testing Laboratory, Inc., Test Report No **FTL-5998, FTL-6005** and **FTL-6012,** dated 08/10/09, all signed and sealed by Julio Gonzales, P.E. (Submitted under files **# 11-1018.16/#09-0826.12**) Note: The test reports No. **FTL 5998** has been revised and reissued on 12/29/09, signed and sealed by Julio Gonzales, P.E.

3. Additional reference supporting test reports # **FTL 5254** and **ATI72138.01-401-18**.

C. CALCULATIONS

1. Anchor verification and comparative analysis dated 01/24/14 and last revised on 02/13/14, sheets 1 thru 45, prepared by PGT, signed and sealed by Lynn Miller, P. E.
2. Glazing complies with ASTME-1300-02 &-04.

D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **11-0624.02** issued to E.I. DuPont De Nemours & CO., Inc. for "DuPont SentryGlas ® interlayer", expiring on 01/14/2017.

F. STATEMENTS

1. Statement letter dated OCT 04, 2013 of compliance to FBC 2010 and "No financial interest", prepared by PGT, signed & sealed by Lynn Miller, P.E.
2. Letter of lab compliance, part of the above test reports. Ishaq I. Chanda

Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 25-0102.01
Expiration Date: March 24, 2030
Approval Date: January 16, 2025

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

G. OTHER

1. This NOA **revises # 11-1018.16**, expiring March 24, 2015.
2. Test proposal dated 6/4/13 approved by Jaime Gascon, P.E.
3. Test proposals No(s) **09-0177, 0177-A, B & C** approved by BCCO.
4. Letter of commitment dated February 20, 2014, issued by PGT, signed by A. Lynn Miller, P.E.

2. Evidence submitted under previous approvals

A. DRAWINGS (submitted under file #16-2609.06/#15-0106.07/#13-1009.07)

1. Drawing No. **PGT0004**, titled "Series 770 H.P. Aluminum SGD – L.M.I.", sheets 01 through 10 of 10, dated 08/05/07, prepared by manufacturer, revision "F" dated 05/05/16, signed and sealed by Anthony Lynn Miller, P. E.

B. TESTS

1. Reference Test report on 1) Uniform Static Air Pressure Test, per FBC, TAS 202-94
   2) Large Missile Impact Test per FBC, TAS 201-94
   3) Cyclic Wind Pressure Loading per FBC, TAS 203-94
   Along with marked-up drawings and installation diagram of Aluminum Sliding Glass Doors (w/ PS, Super, Cardinal & Duraseal Spacers), prepared by Fenestration Testing Laboratory, Inc., Test Reports No(s) **FTL-8717, FTL-8970** and **FTL-8968**, dated 02/15/16, 06/07/16 and 06/20/16, all signed & sealed by Idalmis Ortega, P.E.
2. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202–94
   2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202–94
   3) Water Resistance Test, per FBC, TAS 202–94
   4) Large Missile Impact Test per FBC, TAS 201–94
   5) Cyclic Wind Pressure Loading per FBC, TAS 203–94
   6) Forced Entry Test, per FBC 2411.3.2.1, and TAS 202–94
   along with marked–up drawings and installation diagram of Aluminum Sliding Glass Door (XOX), prepared by Fenestration Testing Laboratory, Inc., Test Report No. **FTL–7825,** dated 06/10/2014, signed and sealed by Idalmis Ortega, P. E.
3. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202–94
   2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202–94
   3) Water Resistance Test, per FBC, TAS 202–94
   4) Large Missile Impact Test per FBC, TAS 201–94
   5) Cyclic Wind Pressure Loading per FBC, TAS 203–94
   6) Forced Entry Test, per FBC 2411.3.2.1, and TAS 202–94
   along with marked–up drawings and installation diagram of Aluminum Sliding Glass Doors (Samples A–1, A–2, B–1, B–2 and C–1), prepared by Fenestration Testing Laboratory, Inc., Test Report No. **FTL–7468,** dated 09/13/2013, signed and sealed by Martin D. Brinson, P. E.

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with **FBC 5th Addition (2014)**, prepared by manufacturer, dated 03/05/15, signed and sealed by Anthony Lynn Miller, P.E.

2. Glazing complies with ASTM E1300–04/ 09. Ishaq I. Chanda

Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 25-0102.01
Expiration Date: March 24, 2030
Approval Date: January 16, 2025

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **11-0624.02** issued to E.I. DuPont De Nemours & CO., Inc. for "DuPont SentryGlas ® interlayer", expiring on 01/14/2017.

F. STATEMENTS

1. Statement letter of conformance to and complying with **FBC 5th Edition (2014)**, issued by manufacturer, dated 12/31/14, signed and sealed by Anthony Lynn Miller, P. E.
2. Test proposal No. **16-0152** dated 03/09/16 approved by RER.
3. Proposals No.'s **09-0177–A**, dated 05/05/09, **–B**, dated 05/27/09 and **–C**, dated 05/27/09, all issued by the Product Control, signed by Ishaq Chanda, P. E.

G. OTHERS

1. Notice of Acceptance No. **15-0106.08**, issued to PGT Industries, Inc. for their Series "**770–HP Aluminum Sliding Glass Doors w / Reinforcements – L.M.I.**", expiring on 03/24/20.

3. Evidence submitted under previous approval

A. DRAWINGS

1. Drawing No. **PGT0004 Rev G**, titled "Series 770 H.P. Aluminum SGD-LMI", sheets 1 through 10 of 10, prepared by manufacturer, dated 08/05/07 and last revised on 11/22/19, signed and sealed by Lynn Miller, P.E.

B. TESTS (submitted under file **#17-0420.13**)

1. None

C. CALCULATIONS (submitted under file **#17-0420.13**)

1. None

D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **17-0808.02** issued to **Kuraray America, Inc.** for their "**SentryGlas® (Clear and White) Glass Interlayers**", expiring on 07/04/23.

F. STATEMENTS

1. Statement letter of conformance to FBC 2017 (6th Edition) and letter of no financial interest, prepared by PGT, dated 11/22/19, signed and sealed by Lynn Miller, P.E.

G. OTHER

1. This NOA **renews NOA # 17-0420.13**, expiring 03/24/ 2025. Ishaq I. Chanda

Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 25-0102.01
Expiration Date: March 24, 2030
Approval Date: January 16, 2025

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

4. Evidence submitted under previous approval

A. DRAWINGS

1. Drawing No. **PGT0004 Rev H**, titled "Series 770 H.P. Aluminum SGD-LMI", sheets 1 through 10 of 10, prepared by manufacturer, dated 08/05/07 and last revised on 04/22/20, signed and sealed by Lynn Miller, P.E.

B. TESTS

1. Test reports on: 1) Air Infiltration Test, per FBC, TAS 202-94
   2) Uniform Static Air Pressure Test, Loading per FBC, TAS 202-94
   3) Water Resistance Test, per FBC, TAS 202-94
   4) Large Missile Impact Test per FBC, TAS 201-94
   5) Cyclic Wind Pressure Loading per FBC, TAS 203-94

along with marked-up drawings and installation diagram of all PGT Industries, Inc. representative units listed below and tested to qualify **Dowsil 791** and **Dowsil 983** silicones, prepared by Fenestration Testing Laboratory, Inc., Test Reports No.;
FTL-7897, PGT PW5520 PVC Fixed Window (unit 6 in proposal), dated 09/03/14
FTL-20-2107.1, PGT SGD780 Aluminum Sliding Glass Door (unit 7 in proposal) **FTL-20-2107.2,** PGT CA740 Alum. Outswing Casement Window (unit 8 in proposal) **FTL-20-2107.3,** PGT PW7620A Aluminum Fixed Window (unit 9 in proposal) and **FTL-20-2107.4**, PGT PW7620A Aluminum Fixed Window (unit 10 in proposal) dated 07/13/20, all signed and sealed by Idalmis Ortega, P.E.

C. CALCULATIONS

1. Anchor verification calculations and structural analysis, complying with **FBC 7th Edition (2020)**, dated 04/20/20, prepared by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
2. Glazing complies with **ASTM E1300-04, -09, -12 and -16**.

D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **17-0808.02** issued to **Kuraray America, Inc.** for their "**SentryGlas® (Clear and White) Glass Interlayers**", expiring on 07/04/23.

F. STATEMENTS

1. Statement letters of conformance to FBC 2020(**7th** Edition), dated 04/20/20, prepared, signed & sealed by Lynn Miller, P. E.

G. OTHER

1. This NOA **revises NOA #19-1126.04** and updates FBC 2020 (7th Edition), expiring 03/24/25.
2. RER Test proposals #**19-1155** dated 01/10/20 approved by Ishaq I. Chanda, P.E. expiring 04/14/21expiring 04/07/25.

Ishaq I. Chanda

Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 25-0102.01
Expiration Date: March 24, 2030
Approval Date: January 16, 2025

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

5. Evidence submitted under previous approval

A. DRAWINGS

1. Drawing No.**PGT0004 Rev 1**, titled "Series 770 H.P. Aluminum SGD-LMI", sheets 1 through 10 of 10, prepared by manufacturer, dated 08/05/07 and last revised on 06/18/23, signed and sealed by Lynn Miller, P.E.

B. TESTS (submitted under previous approval)

1. None

C. CALCULATIONS(submitted under previous approval)

1. None

D. QUALITY ASSURANCE

1. Miami Dade Department of Regulatory and Economic Resources (RER).

E. MATERIAL CERTIFICATIONS

1. None.

F. STATEMENTS

1. Statement letter of conformance, complying with **FBC 7th Edition (2020)** and the **FBC 8th Edition (2023)**, dated 06-18-23, issued by manufacturer, signed and sealed by Anthony Lynn Miller, P.E.
2. Statement letters of conformance to FBC 2020(**7th** Edition), dated 04/20/20, prepared, signed & sealed by Lynn Miller, P. E.

G. OTHER

1. This NOA **revises NOA #20-0429.10** and updates to FBC 2023 (8th Edition), expiring 03/24/25.

Ishaq I. Chanda

Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 25-0102.01
Expiration Date: March 24, 2030
Approval Date: January 16, 2025

NOTICE OF ACCEPTANCE: EVIDENCE SUBMITTED

6. NEW EVIDENCE SUBMITTED

A. DRAWINGS

1. Drawing No.**PGT0004 Rev J**, titled "Series 770 H.P. Aluminum SGD-LMI", sheets 1 through 10 of 10, prepared by manufacturer, dated 08/05/07 and last revised on 12/20/24, signed and sealed by Lynn Miller, P.E.

B. TESTS

1. None.

C. CALCULATIONS

1. None.

D. QUALITY ASSURANCE

1. Miami-Dade Department of Regulatory and Economic Resources (RER)

E. MATERIAL CERTIFICATIONS

1. Notice of Acceptance No. **22-1116.01** issued to **Kuraray America, Inc.** for their **"SentryGlas® (Clear and White) Glass Interlayers"**, expiring on 07/04/28.

F. STATEMENTS

1. Statement letter of conformance, complying with **FBC 8th Edition (2023)**, and statement letter of no financial interest, dated 12/18/24, signed and sealed by Anthony Lynn Miller, P.E.
2. Statement letter dated 12/18/24 issued by manufacturer requesting renewal with company name change to PGT industries, LLC, signed and sealed by Anthony Lynn Miller, P.E.
3. e-mail dated 12/23/24 sent by Lynn Miller (PGT Code Compliance Manager), consists of PGT innovation form 8-k filed w/SEC, PGT innovation form 10-K filled w/SEC and Exhibit 21(Form 10-K); PGT innovation's list of subsidiaries.

G. OTHERS

1. Article of conversion of PGT Industries, Inc to PGT industries, LLC pdf provided on 12/24/24 by Ms. April Lee, Assistant General Counsel.
2. Florida Department of State, Division of Corporation listing # L24000142070 of PGT Industries, LLC as active status since 12/17/24.
3. Florida Department of State, Division of Corporation listing # F03387 of PGT Industries, Inc as Inactive status.
4. PGT Name change organization chart layout prepared by RER (for file use only).
5. This NOA **revises & renews NOA No. 23-0710.05 (**PGT Industries, Inc.**)**, expires on 03/24/30.

Ishaq I. Chanda

Ishaq I. Chanda, P.E.
Product Control Unit Supervisor
NOA No. 25-0102.01
Expiration Date: March 24, 2030
Approval Date: January 16, 2025

SERIES 770 HP, LARGE MISSILE IMPACT RESISTANT SLIDING GLASS DOOR

DESIGN PRESSURE RATING	IMPACT RATING
SEE TABLE 1 ON SHEET 4	RATED FOR LARGE & SMALL MISSILE IMPACT RESISTANCE

1) THIS PRODUCT HAS BEEN DESIGNED & TESTED TO COMPLY WITH THE REQUIREMENTS OF THE FLORIDA BUILDING CODE, INCLUDING THE HIGH VELOCITY HURRICANE ZONE (HVHZ).

2) SHUTTERS ARE NOT REQUIRED WHEN USED IN WIND-BORNE DEBRIS REGIONS. FOR INSULATED GLASS INSTALLATIONS ABOVE 30 IN THE HVHZ, THE OUTBOARD LITE (CAP) MUST BE TEMPERED.

3) FOR MASONRY APPLICATIONS IN MIAMI-DADE COUNTY, USE ONLY MIAMI-DADE COUNTY APPROVED MASONRY ANCHORS. MATERIALS USED FOR ANCHOR EVALUATION WERE SOUTHERN PINE, ASTM C90 CONCRETE MASONRY UNITS AND CONCRETE WITH MIN. f'c(2) PER ANCHOR TYPE.

4) ALL WOOD BUCKS LESS THAN 1-1/2" THICK ARE TO BE CONSIDERED 1X INSTALLATIONS. 1X WOOD BUCKS ARE OPTIONAL IF UNIT IS INSTALLED DIRECTLY TO SUBSTRATE. WOOD BUCKS DEPICTED AS 2X ARE 1-1/2" THICK OR GREATER. 1X AND 2X BUCKS (WHEN USED) SHALL BE DESIGNED AND SECURED TO PROPERLY TRANSFER LOADS TO THE STRUCTURE. WOOD BUCK DESIGN AND INSTALLATION IS THE RESPONSIBILITY OF THE ENGINEER (S) OR) OR ARCHITECT OF RECORD (AOR).

5) ANCHOR EMBEDMENT TO BASE MATERIAL SHALL BE BEYOND WALL DRESSING OR STUCCO. USE ANCHORS OF SUFFICIENT LENGTH TO ACHIEVE REQUIRED MIN. EMBEDMENT. SILL ANCHORS MUST BE SEALED. INSTALLATION SCREWS, FRAME AND PANEL CORNERS TO BE SEALED WITH NARROW JOINT SEALANT. OVERALL SEALING/FLASHING STRATEGY FOR WATER RESISTANCE OF INSTALLATION SHALL BE DONE BY OTHERS AND IS BEYOND THE SCOPE OF THESE INSTRUCTIONS.

6) 1/4" MAX. SHIMS ARE REQUIRED AT EACH ANCHOR LOCATION WHERE THE PRODUCT IS NOT FLUSH TO THE SUBSTRATE. USE SHIMS CAPABLE OF TRANSFERRING APPLIED LOADS.

7) DESIGN PRESSURES:
A. NEGATIVE DESIGN LOADS BASED ON STRUCTURAL TESTING AND GLASS PER ASTM E1300
B. POSITIVE DESIGN LOADS BASED ON WATER TEST PRESSURE, STRUCTURAL TESTING AND GLASS PER ASTM E1300.
C. DESIGN LOADS ARE BASED ON ALLOWABLE STRESS DESIGN, ASD.

8) THE ANCHORAGE METHODS SHOWN HAVE BEEN DESIGNED TO RESIST THE WINDLOADS CORRESPONDING TO THE REQUIRED DESIGN PRESSURE. THE 33-1/3% STRESS INCREASE HAS NOT BEEN USED IN THE DESIGN OF THIS PRODUCT. THE 1.6 LOAD DURATION FACTOR WAS USED FOR THE EVALUATION OF ANCHORS INTO WOOD. ANCHORS THAT COME INTO CONTACT WITH OTHER DISSIMILAR MATERIALS SHALL MEET THE REQUIREMENTS OF THE FLORIDA BUILDING CODE FOR CORROSION RESISTANCE.

9) METAL SUBSTRATE TO MEET MIN. STRENGTH AND THICKNESS REQUIREMENTS PER CURRENT FLORIDA BUILDING CODE AND TO BE REVIEWED BY THE AUTHORITY HAVING JURISDICTION.

10) APPLICABLE EGRESS REQUIREMENTS TO BE REVIEWED BY BUILDING OFFICIAL.

11) IF SILL IS TIGHT TO SUBSTRATE, GROUT OR OTHER MATERIAL IS NOT REQUIRED. IF USED, NON-SHRINK, NON-METALLIC GROUT, MAX. 1/4" THICK & 5400 PSI MIN. (DONE BY OTHERS) MUST FULLY SUPPORT THE ENTIRE LENGTH OF THE SILL THAT IS NOT TIGHT TO THE SUBSTRATE, AND TRANSFER SHEAR LOAD TO SUBSTRATE. IF SUBSTRATE IS WOOD, 30# FELT PAPER OR MASTIC IS REQUIRED BETWEEN THE GROUT AND WOOD SUBSTRATE, OR AS APPROVED BY THE AUTHORITY HAVING JURISDICTION.

12) REFERENCED TEST REPORTS: PTL-5998, PTL-4935, PTL-7496, PTL-4512 & PTL-7525. DEWALT ULTRACON® NOA, ELCO ULTRACON NOA, DEWALT/ELCO CRETEFIX'S NOA AND AGGREGATOR NOA.

TABLE A

Anchor Group	Anchor Type	Frame Member	Substrate	Min. Edge Distance	Min. O.C. Distance	Min. Embedment or Metal Thickness
A	#12 SS-S or #14 SS-S&W	2X	Structural Pine (SG = 0.55)	4-1/4"	12"	1-1/2"
			6063-T5 Aluminum	2"	as req'd	0.125" (12 GA)
			Mild Steel	1.5"	5-1/4"	0.062"
			18 - 20 Steel Stud	2.5"	as req'd	0.045" (18 GA)
	1/4" Dia. Kwik Con	2X	Concrete (min. 2.5 f'c)	1-1/2"	5"	1-3/4"
		2X/1X	Solid Block w/ f'm=1,500	3"	5"	3"
		2X/1X	Hollow Block (f'm=1,500)	3"	5"	1-1/2"
		1X	Southern Pine (SG = 0.55)	4"	11"	1-3/4"
B	#12 Steel SHTG Kwik TC	2X	Structural Pine (SG = 0.55)	4-1/4"	12"	1-1/2"
			6063-T5 Aluminum	2.5"	as req'd	0.125" (12 GA)
			Mild Steel	3.5"	as req'd	0.062"
			18 - 20 Steel Stud	4.5"	as req'd	0.045" (18 GA)
C	1/4" Dia Kwik UltraCon	Fiber Cement	Concrete (min. 3 f'c)	1-1/2"	6"	1-3/4"
		2X/1X	Concrete (min. 3 f'c)	3"	6"	1-3/4"
		2X/1X	Hollow Block (f'm=1,500)	3"	5"	1-1/2"
		1X	Southern Pine (SG = 0.55)	4"	11"	1-3/4"
D	1/4" #12 SS Wood Screw	Metal 12 GA	Concrete (min. 3 f'c)	3"	6"	1-3/4"
		2X/1X	Concrete (min. 3 f'c)	3"	6"	1-3/4"
		2X/1X	Hollow Block (f'm=1,500)	3-1/2"	6"	1-1/2"
		1X	Southern Pine (SG = 0.55)	4"	11"	1-3/4"

1) WHERE SUBSTRATE CONDITIONS REQUIRE AN ANCHOR FROM MORE THAN ONE OF THE ANCHOR GROUPS ABOVE, CHOOSE THE ANCHOR GROUP OF THE LOWEST LETTER FOR ALL TABLES IN THIS APPROVAL.
2) ALL ANCHOR/SUBSTRATES ARE APPLICABLE FOR THE MINIMUM STRENGTHS OF ANCHORS AND SUBSTRATES, SEE TABLE 1, SHEET 4.
3) HOLLOW BLOCK VALUES MAY ALSO BE USED IN FILLED BLOCK APPLICATIONS.
4) ANCHORS MUST BE OF SUFFICIENT LENGTH SO THAT A MINIMUM OF 3 THREADS EXTEND BEYOND METAL SUBSTRATE.

DLO WIDTH = NOM. PANEL WIDTH – 7"
PANEL HEIGHT = DOOR UNIT HEIGHT - 1-7/8"
DLO HEIGHT = DOOR UNIT HEIGHT - 10-1/8"
DLO HEIGHT = PANEL HEIGHT - 8-1/4"

CODES / STANDARDS USED:
- 2023 FLORIDA BUILDING CODE (FBC), 8TH EDITION
- NDS & LSD-SDI
- ANSI/AWC WFCM FOR WOOD CONSTRUCTION
- ALUMINUM DESIGN MANUAL, ADM-2020
- ASCE 7-22
- AISI S100-16

GENERAL NOTES 1
ELEVATIONS 2
GLAZING DETAILS 3
DESIGN PRESSURES 4
ELEVATION 5
SECTIONS 6
ANCHOR LAYOUT 7
ASSEMBLY SECTIONS 8
PARTS LIST 9
EXTRUSIONS 10

PRODUCT RENDERED in complying with the Florida Building Code
NOA No. 25-0102.01
Expiration Date: 02.24.2030
By: Miami-Dade Product Control

REVISED CO. ADDRESS
JR - 12/05/24


REVISIONS			
DESCRIPTION	DATE	BY	
REVISED CO. ADDRESS	12/05/24	JR	1

ALL PANELS SLIDING GLASS DOOR & (#)
ANCHOR TYPES & DETAILS NOTES


PGT
PGT Industries, Inc.
1070 Technology Drive
North Venice, FL 34275
(941) 480-1600

KENNETH W. MILLER
LICENSE
No. 60709
STATE OF FLORIDA
PROFESSIONAL ENGINEER
KENNETH W. MILLER, P.E.
P.E. # 60709


EXAMPLE CONFIGURATIONS

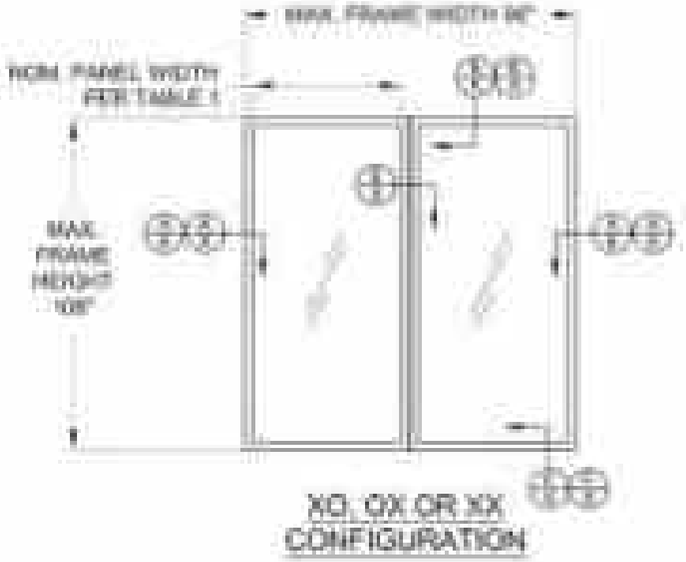

XO, OX OR XX
CONFIGURATION

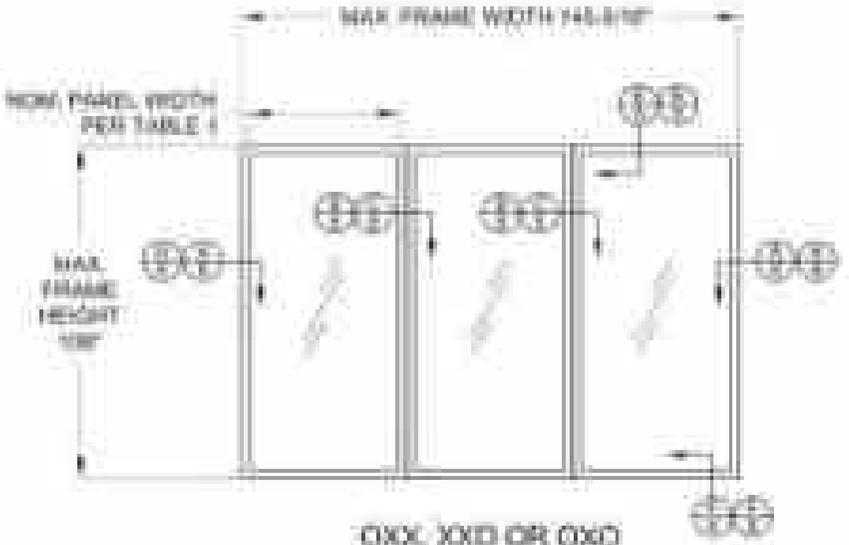

OXX, XXO OR OXO
CONFIGURATION

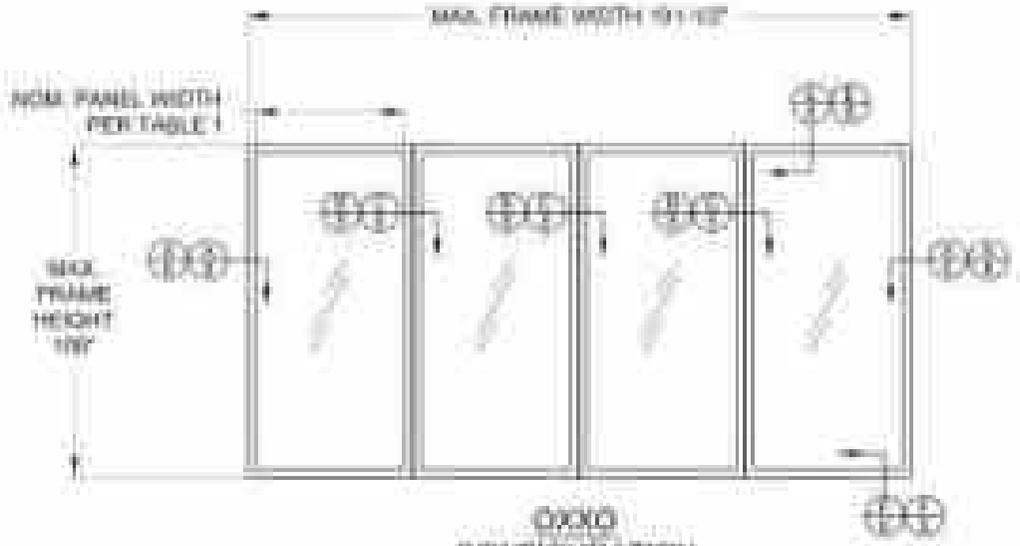

OXXO
CONFIGURATION

DLO WIDTH = NOM. PANEL WIDTH - 5"
PANEL HEIGHT = DOOR UNIT HEIGHT - 3 3/8"
DLO HEIGHT = DOOR UNIT HEIGHT - 10 1/8"
DLO HEIGHT = PANEL HEIGHT - 6 1/4"

PRODUCT RENEWED
as complying with the Florida Building Code
NOA No. 20-0102.01
Expiration Date 03/04/2030
By
Miami-Dade Product Control

REVISED CO ADDRESS
JR - 12/05/24


NO.	REVISION	DATE
1	REVISION PER RAI	03/04/20

ALUMINUM SLIDING GLASS DOOR
EXAMPLE CONFIGURATIONS


JOB NO. 19-01

SCALE: NTS


PGT

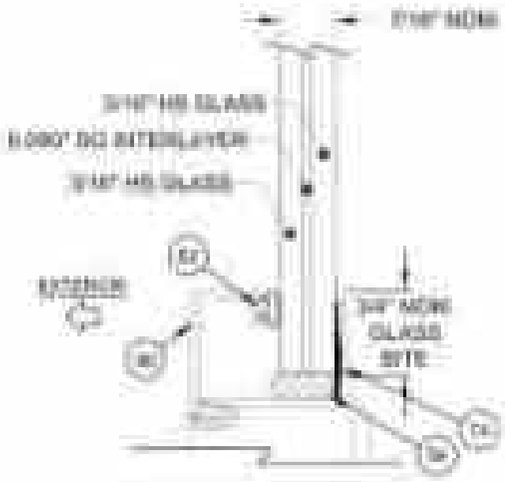


7/16" LAMINATED GLASS
TYPE G4

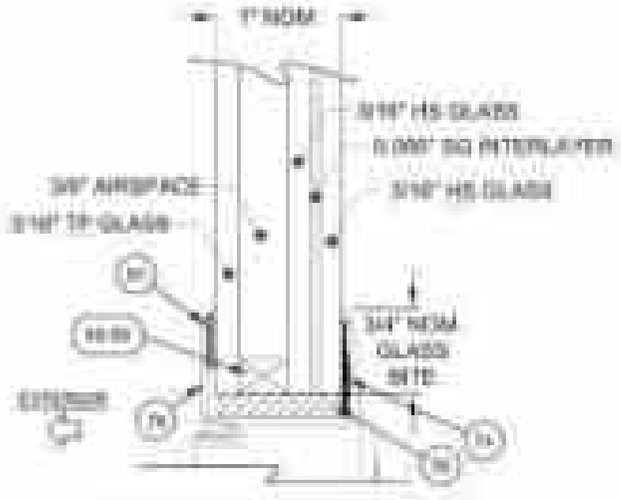


1" LAMINATED INSULATING GLASS
TYPE G6

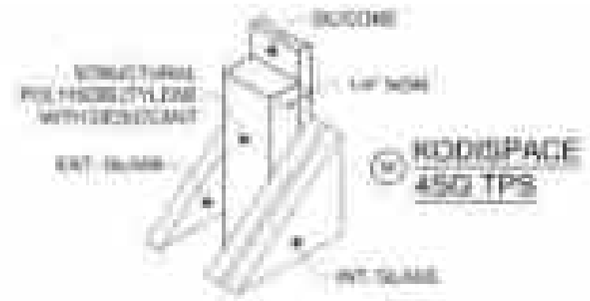

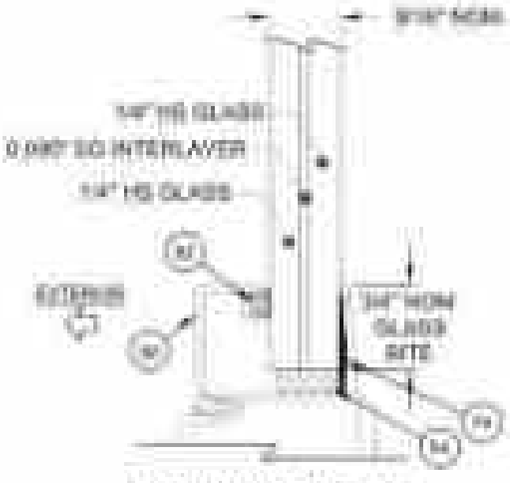

9/16" LAMINATED GLASS
TYPE G4A

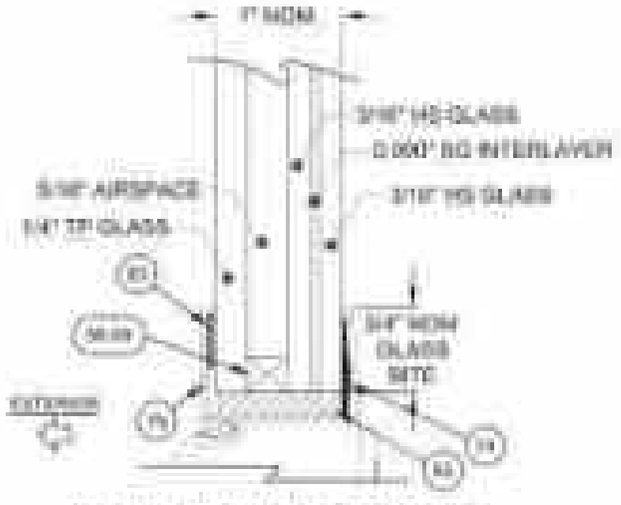

1" LAMINATED INSULATING GLASS
TYPE G6A

Part #	Description	Material
SK	Kommerling 4SQ TPS Spacer System	See this Sheet for Materials
SF	Quanex Super Spacer nxt with Hot Melt Butyl	
SS	Quanex Duraseal Spacer	
SX	Cardinal XL Edge Spacer	

REFERENCE TEST REPORTS: ITL-21717-19SA & 20/3

"AN" = ANNEALED
"HS" = HEAT STRENGTHENED
"TP" = TEMPERED
"SG" = SENTRYGLAS® INTERLAYER BY KURARAY AMERICA, INC.

PRODUCT RENDERED
in conformity with the Florida Building Code
NOA No. 25-0102.01
Expiration Date 02.24.2030
By
Miami-Dade Product Control

REVISED CO ADDRESS
JR - 12/05/24

#	REVISIONS	DATE
1	ADDED G4A & G6A	10/31/24
2	ADDED SX	12/05/24

ALUMINUM SLIDING GLASS DOOR (LH)

GLAZING DETAILS

SCALE: 3" = 1'-0"

IGT

INTERNATIONAL GLASS TECHNOLOGY

STATE OF FLORIDA
No. 84700
REGISTERED
PROFESSIONAL ENGINEER

TABLE 1


Design Pressure (DP) and Anchor Quantities Required

For all Approved Configurations, Sheet 2 and Charts Types, Sheet 3)

Nominal Panel Width (in)	Nominal Interlock Height (in)	Design Pressure (psf)	Frame Height: 81" (6'-9" O.A.O.) Anchor Group A	B	C	D	Frame Height: 93" (7'-9" O.A.O.) Anchor Group A	B	C	D	Frame Height: 105" (8'-9" O.A.O.) Anchor Group A	B	C	D	Frame Height: 117" (9'-9" O.A.O.) Anchor Group A	B	C	D	Frame Height: 129" (10'-9" O.A.O.) Anchor Group A	B	C	D	Frame Height: 141" (11'-9" O.A.O.) Anchor Group A	B	C	D
24"	1" (O.A.O.)	Design Pressure	+60/-70				+60/-70				+60/-70				+60/-70				+60/-70				+60/-70				+60/-70			
		Head/Sill	C1+2	C2+2	C2+2	C1+2	C1+2	C2+2	C2+2	C1+2	C1+2	C2+2	C2+2	C1+2	C1+2	C2+2	C2+2	C1+2	C1+2	C2+2	C2+2	C1+2	C1+2	C2+2	C2+2	C1+2	C1+2	C2+2	C2+2	C1+2
		Jamb	10	8	8	8	10	8	8	8	10	10	10	10	12	10	10	10	12	10	10	10	14	10	10	10	14	10	10	10
30"	2" (O.A.O.)	Design Pressure	+60/-120				+60/-100				+60/-90				+60/-90				+60/-90				+60/-90				+60/-90			
		Head/Sill	C3+2	C2+2	C3+2	C1+2	C3+2	C3+2	C3+2	C1+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2
		Jamb	12	10	8	8	12	12	8	8	14	12	10	10	14	12	10	10	14	12	10	10	16	12	10	10	16	12	10	10
36"	2" (O.A.O.)	Design Pressure	+60/-100				+60/-100				+60/-70				+60/-70				+60/-70				+60/-70				+60/-70			
		Head/Sill	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2
		Jamb	12	10	8	8	14	12	8	8	14	12	10	10	16	14	10	10	16	14	10	10	18	14	12	10	18	14	12	10
42"	3" (O.A.O.)	Design Pressure	+60/-100				+60/-70				+60/-70				+60/-70				+60/-70				+60/-70				+60/-70			
		Head/Sill	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2
		Jamb	14	12	8	8	16	12	10	8	16	14	10	10	16	14	12	10	20	16	12	12	20	16	14	12	20	16	14	12
48"	4" (O.A.O.)	Design Pressure	+60/-60				+60/-70				+60/-70				+60/-70				+60/-70				+60/-70				+60/-70			
		Head/Sill	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2	C3+2
		Jamb	16	12	10	8	16	14	10	8	16	16	12	10	20	16	12	10	20	16	14	12	20	16	14	12	20	16	14	12


NOTE: JAMB ANCHORS ARE SPECIFIED AS THE TOTAL QUANTITY. DIVIDE BY 2 FOR PAIRS TO BE INSTALLED.

EXAMPLE ON SHEET 5

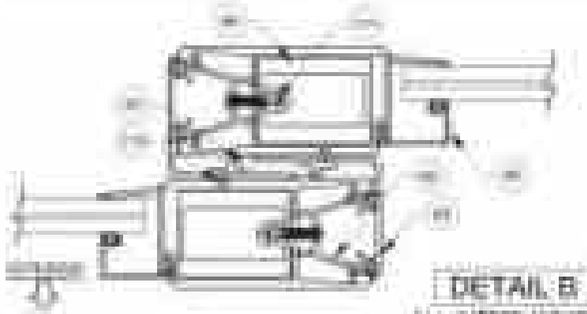

DETAIL B

DETAIL B
ALL INTERLOCKS TO BE REINFORCED

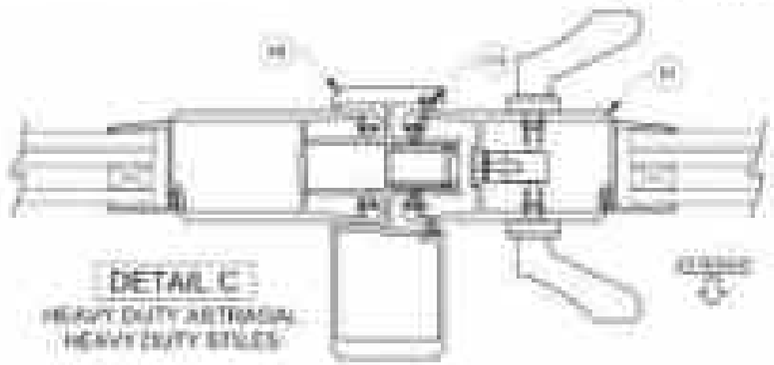

DETAIL C
HEAVY DUTY ASTRASIA
HEAVY DUTY STILES



1)POSITIVE PRESSURES IN TABLE ARE BASED ON THE USE OF THE 4" SILL.

3) WHEN USING THE 2 1/2" SILL, POSITIVE DP IS 45 ST PSF MAX. AND WITH THE 3 1/4" SILL, POSITIVE PRESSURES IS 60.0 PSF MAX. (NEGATIVE PRESSURES UNCHANGED). SEE TABLE 1A ON THIS SHEET.

3) 2-1/2", 3 1/4" AND 4" SILL HEIGHTS ARE TESTED FOR WATER INFILTRATION. WHEREAS THE 1 1/2" SILL IS NOT AND MUST ONLY BE USED WHERE WATER RESISTANCE IS NOT REQUIRED. POSITIVE DESIGN PRESSURES SHOWN IN TABLE 1 MAY BE USED WHEN THE DOOR IS PROTECTED BY AN OVERHANG COMPLYING WITH THE FLORIDA BUILDING CODE (SEE ADJACENT DIAGRAM). THIS CONDITION IS NOT RATED FOR WATER INFILTRATION.

4) SEE SHEETS 6 & 7 FOR ANCHORAGE SPACING AND EMBEDMENT INFORMATION. DOOR SIZE TO COMPLY WITH FBC 8 GRESS REQUIREMENTS.

SLD WIDTH = NOM. PANEL WIDTH - 3"
PANEL HEIGHT = DOOR UNIT HEIGHT - 1 7/8"
SLD HEIGHT = DOOR UNIT HEIGHT - 10 1/8"
SLD HEIGHT = PANEL HEIGHT - 6 1/4"

TABLE 1A

Sill Height to Max. (+) DP (Water Infiltration Rating)	
Sill Riser Height (Top of Rigid Sill to Sheet 3)	(+) Design Pressure, psf
1" (Sill = 1 1/2")	see note 2
2" (Sill = 2 1/2")	+ 45.0
2.5" (Sill = 3 1/4")	+ 60.0
3" (Sill = 4")	+ 60.0

SEE NOTES 1-2

PRODUCT RENEWED
in complying with the Florida Building Code
NOA No. 25-0102.01
Expiration Date 03.24.2030
By
Miami-Dade Product Control

REVISED CO ADDRESS
JR - 12/05/24

1	12/05/24	REVISED CO ADDRESS
0	03.24.25	INITIAL RELEASE


PGT

ALUMINUM SLIDING GLASS DOOR
DP & ANCHOR QUANTITY TABLE

WINCHESTER, KELLER
No. 82709
STATE OF FLORIDA
PROFESSIONAL ENGINEER

EXAMPLE OXX ANCHORAGE PLAN:

(3) PANEL 48" x 108" DOOR FROM TABLE ON SHEET 4, ANCHOR TYPES C IN CONCRETE SUBSTRATE

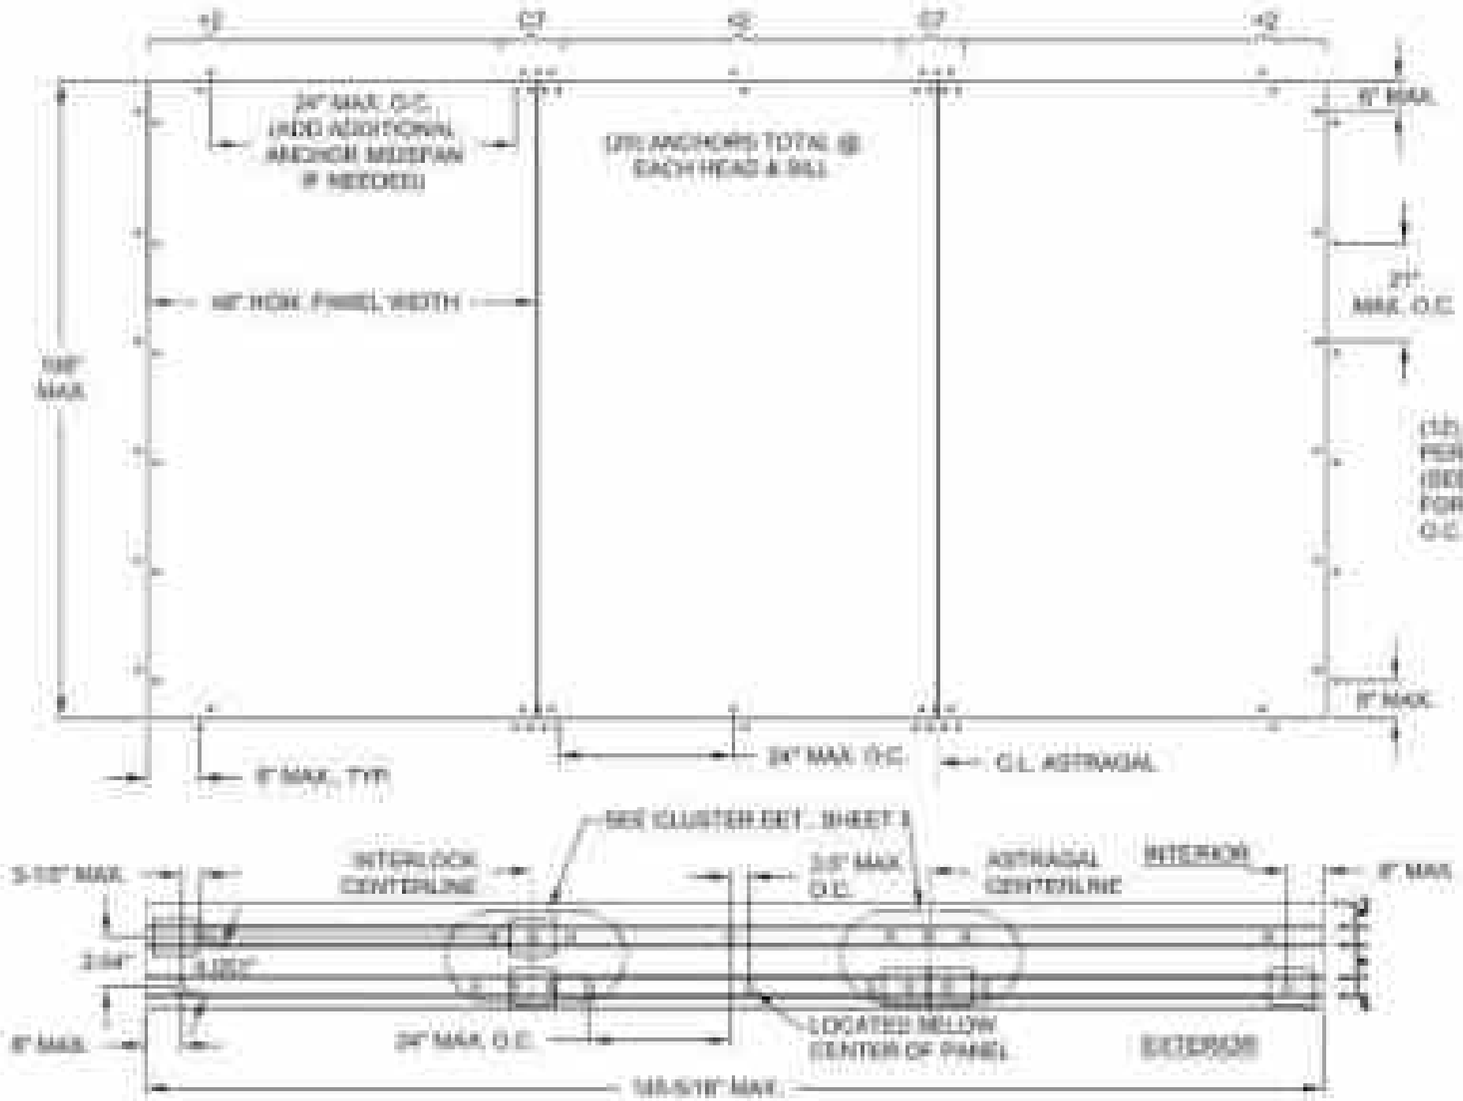

"ANCHORS PER PANEL" ARE THOSE AT THE HEAD AND SILL BETWEEN CLUSTERS OR THOSE BETWEEN A CLUSTER AND A FRAME JAMB.

ANCHORAGE REQUIREMENTS NOTES:

1. APPROVED ANCHOR TYPES: SEE TABLE A, SHEET 1.
2. ANCHOR LOCATION SPACING FOR ANCHOR QUANTITIES SPECIFIED IN TABLE 1 ON SHEET 4.

HEAD & SILL: 8" MAX. FROM FRAME CORNERS. USE SPECIFIED CLUSTER FROM TABLE ON SHEET 4 AT EACH INTERLOCK AND ASTRAGAL LOCATION PLUS SPECIFIED QUANTITY OF ADDITIONAL INTERMEDIATE ANCHORS PER PANEL (THE 8" FROM CORNER ANCHORS CAN BE INCLUDED). ADDITIONAL ANCHORS 24" MAX. ON CENTER.
SEE EXAMPLE ANCHORAGE PLANS ABOVE AND EXAMPLE CLUSTERS AT ASTRAGAL / INTERLOCKS ON SHEET 7.

JAMBS: 8" MAX. FROM BOTTOM AND 21" MAX. O.C. UTILIZING JAMB ANCHOR QUANTITIES FROM TABLE ON SHEET 4.

DLO WIDTH = NOM. PANEL WIDTH - 7"
PANEL HEIGHT = DOOR UNIT HEIGHT - 1-7/8"
DLO HEIGHT = DOOR UNIT HEIGHT - 10-1/8"
DLO HEIGHT = PANEL HEIGHT - 8-1/8"

PRODUCT RENEWED
in complying with the Florida Building Code
NOA No. 25-0102.01
Expiration Date: 03.24.2030
By: Miami-Dade Product Control

REVISED CO. ADDRESS
JR - 12/05/24

1	12/05/24	REVISED CO. ADDRESS
0	03/24/20	ORIGINAL RELEASE


PGT

ALUMINUM SLIDING GLASS DOOR


ELEVATION ANCHOR SPACING

SHEET NO. 10 OF 10


WILLIAM MILLER
No. 80709
STATE OF FLORIDA
PROFESSIONAL ENGINEER

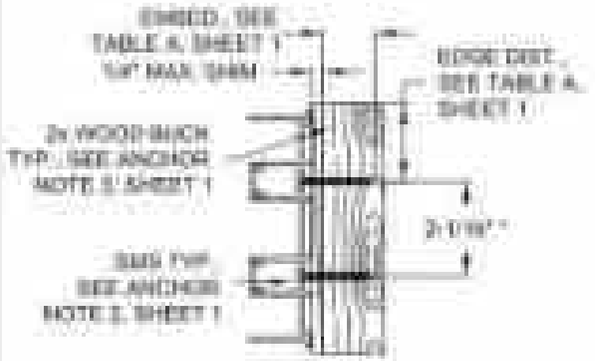

DETAIL A — 2-TRACK FRAME JAMB WOOD INSTALLATION

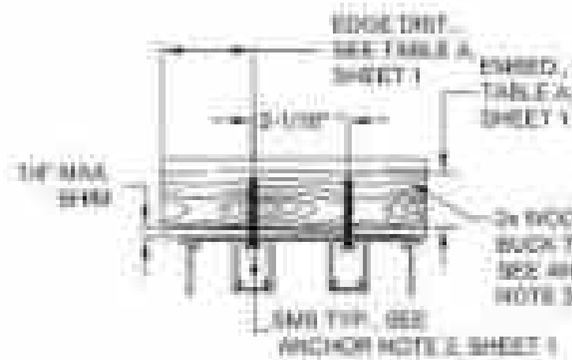

DETAIL E — 2-TRACK FRAME HEAD WOOD INSTALLATION

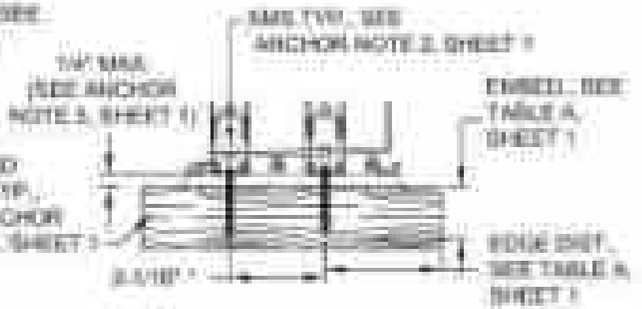

DETAIL F — 2-TRACK FRAME SILL WOOD INSTALLATION

NOTES:


1) ALL DIMENSIONS SHOWN ARE BASED ON MINIMUM ALLOWED.

2) METAL SUBSTRATES SIMILAR TO WOOD SUBSTRATES AS SHOWN.


3) ANCHORS MUST BE OF SUFFICIENT LENGTH SO THAT A MINIMUM OF 3 THREADS EXTEND BEYOND METAL SUBSTRATE.

4) 1/4" SHIM MAY BE SHORTER THAN THE FRAME BUT MUST FULLY SUPPORT THE LOADS IMPOSED ON IT.


* DIAGONAL O.C. DIMENSION IS 4.65" IN THE HEAD & SILL, 8" IN THE JAMB.

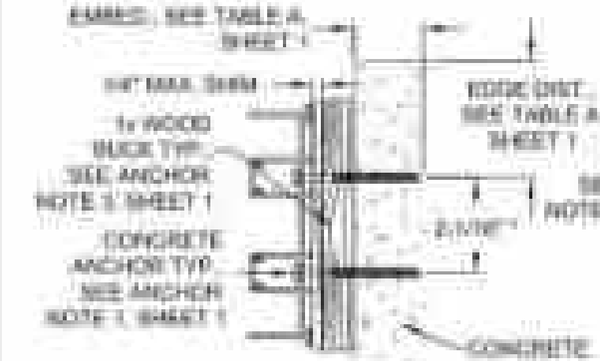


DETAIL A — 2-TRACK FRAME JAMB CONCRETE INSTALLATION

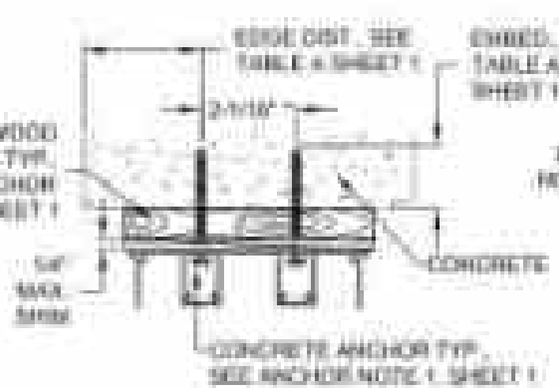


DETAIL E — 2-TRACK FRAME HEAD CONCRETE INSTALLATION

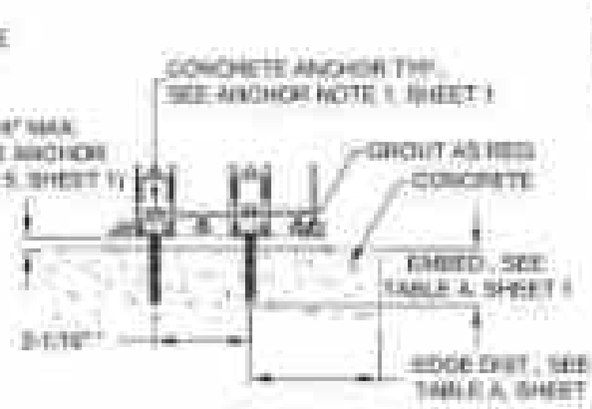


DETAIL F — 2-TRACK FRAME SILL CONCRETE INSTALLATION

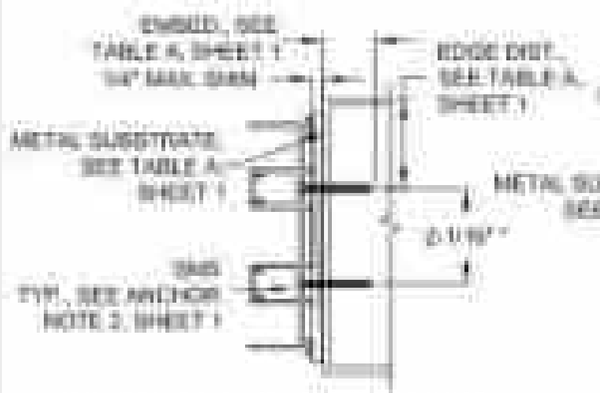

DETAIL A — 2-TRACK FRAME JAMB WOOD INSTALLATION

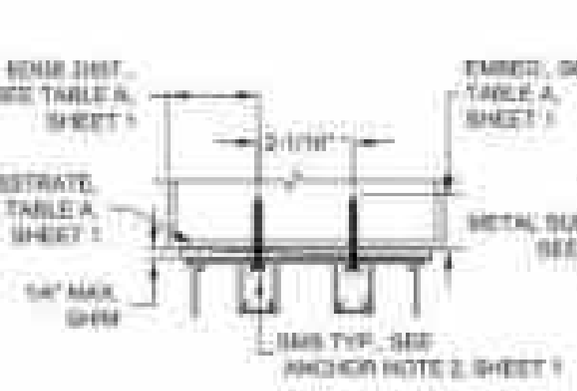

DETAIL E — 2-TRACK FRAME HEAD WOOD INSTALLATION

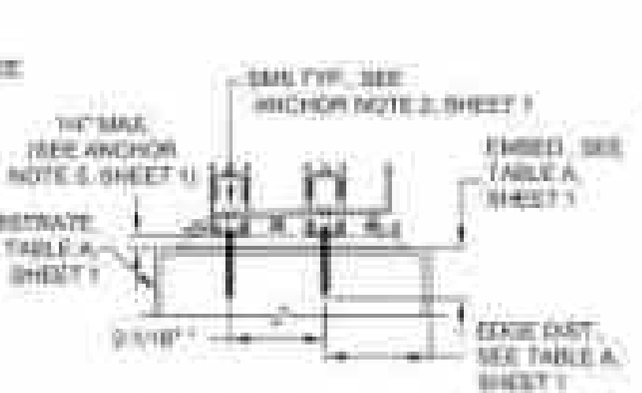

DETAIL F — 2-TRACK FRAME SILL WOOD INSTALLATION



OPTIONAL JAMB ANCHOR FOR FOR DETAIL "A", SEE ELEVATION FOR O.C. SPACING, SHEET 3

EXTERIOR INTERIOR
(ALL VERT. SECTIONS)

PRODUCT RENEWED
in conformity with the Florida Building Code
NOA No. 25-0102.01
Expiration Date: 03.24.2030
By: Miami-Dade Product Control

REVISED CO. ADDRESS
JR - 12/05/24

#	DATE	REVISION
1	12/05/24	REVISED CO. ADDRESS
2	01/17/25	ADDED DETAIL "C"
3	02/07/25	ADDED DETAIL "E"
4	02/07/25	ADDED DETAIL "F"
5	02/07/25	ADDED DETAIL "A"


INSTALL CROSS SECTIONS

ALL ALUMINUM SLIDING GLASS DOOR

PGT

ENGINEERING SEAL
No. 92709
STATE OF FLORIDA
PROFESSIONAL ENGINEER

K	SINGLE INTERLOCK		LOCKSTILE
A	SINGLE INTERLOCK		LOCKSTILE
D	LOCKSTILE		SINGLE INTERLOCK
M	LOCKSTILE		SINGLE INTERLOCK
L (MOVING)	SINGLE INTERLOCK		ASTRAGAL (S) OUT
LR (MOVING)	ASTRAGAL (S) OUT		SINGLE INTERLOCK
N (MOVING)	ASTRAGAL (S) IN		SINGLE INTERLOCK
C (MOVING)	SINGLE INTERLOCK		ASTRAGAL (S)
P	SINGLE INTERLOCK		FIXED LOCKSTILE
R	FIXED LOCKSTILE		SINGLE INTERLOCK
T (MOVING)	ASTRAGAL OUT		FIXED LOCKSTILE
T (MOVING)	ASTRAGAL IN		FIXED LOCKSTILE
S (MOVING)	FIXED LOCKSTILE		ASTRAGAL OUT
S (MOVING)	FIXED LOCKSTILE		ASTRAGAL IN

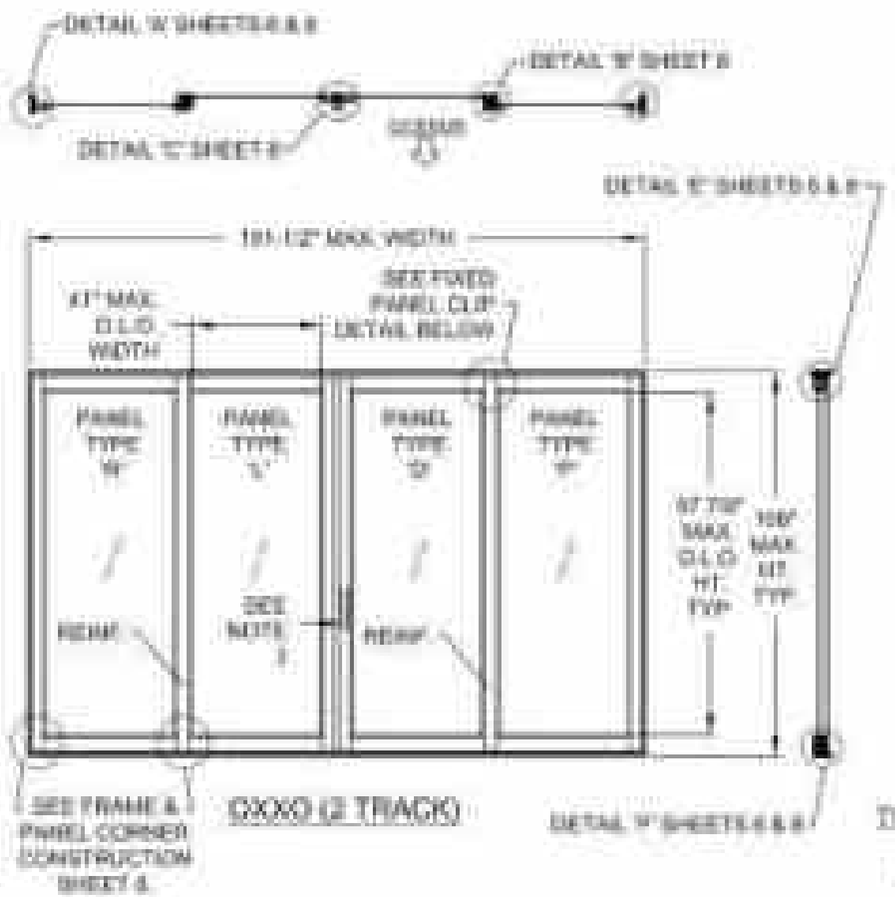

GXXO (2 TRACK)

NOTES:
1) SEE THIS SHEET FOR INDIVIDUAL PANEL CONFIGURATIONS. SEE SHEET 8 FOR SECTION DETAILS AND SHEETS 4-6 FOR ANCHORAGE DETAILS.

2) O.L.O. WIDTH = 41" MAX. O.L.O. HEIGHT = 97-7/8" MAX.

3) (1) LOCK STEMS 73 & 167 AT EACH LOCKSTILE LOCKING INTO KEEPER (ITEM 102) AT FRAME JAMB OR ASTRAGAL.

4) MINIMUM NOMINAL PANEL WIDTH FOR ALL PANEL CONFIGURATIONS EQUALS 46"



TYPICAL JAMB ANCHOR PER FOR DETAIL 'A', SEE ELEVATION FOR O.C. SPACING, SHEET 8

SIZE REINFORCEMENT REQUIRED AT ALL INTERLOCKS.


INTERIOR (ALL PANEL TYPES) EXTERIOR

NOTES FOR FIGS 1-4
1) ALL DIMENSIONS SHOWN ARE BASED ON MINIMUM ALLOWED

2) METAL SUBSTRATES SIMILAR TO WOOD SUBSTRATES AS SHOWN

3) DIAGONAL O.C. DIVISION IS 4.00" IN THE HEAD & SILL, 6" IN THE JAMB.

FIG.1. ASTRAGAL OR INTERLOCK CENTERLINE

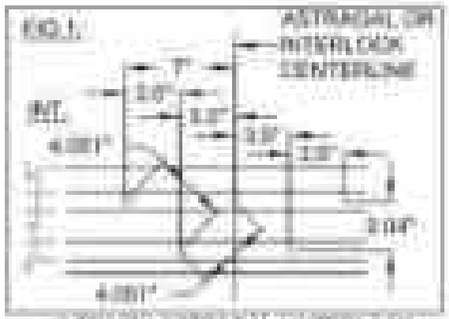


1) TRACK, ASTRAGAL / INTERLOCK
1) ANCHOR CLUSTER - CE

FIG.2. ASTRAGAL OR INTERLOCK CENTERLINE



2) TRACK, ASTRAGAL / INTERLOCK
2) ANCHOR CLUSTER - CE

FIG.3. ASTRAGAL OR INTERLOCK CENTERLINE

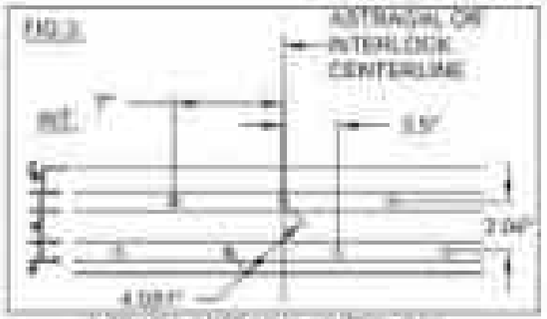

2) TRACK, ASTRAGAL / INTERLOCK
2) ANCHOR CLUSTER - CT

FIG.4. ASTRAGAL OR INTERLOCK CENTERLINE



2) TRACK, ASTRAGAL / INTERLOCK
2) ANCHOR CLUSTER - CB

PRODUCT RENDERED in complying with the Florida Building Code
NOA No. 25-0102.01
Expiration Date 03.24.2030
By: Miami-Dade Product Control

REVISED CO. ADDRESS
JR - 12/09/24

1	12/09/24	REVISED CO. ADDRESS	JR
		REVISIONS	

PGT

ALL ALUMINUM SLIDING GLASS DOOR WITH LAMINATED GLASS

PANEL TYPES W ANCH LAYOUT

SHEET NO. 7 OF 8


SCALE: 1/4" = 1'-0"


DRAWN BY: JR


DATE: 12/09/24


PROJECT NO.

REVISIONS

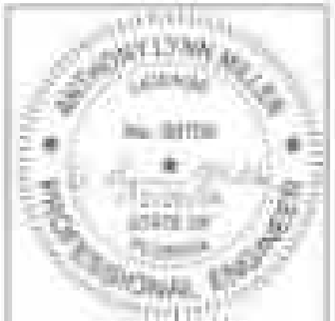


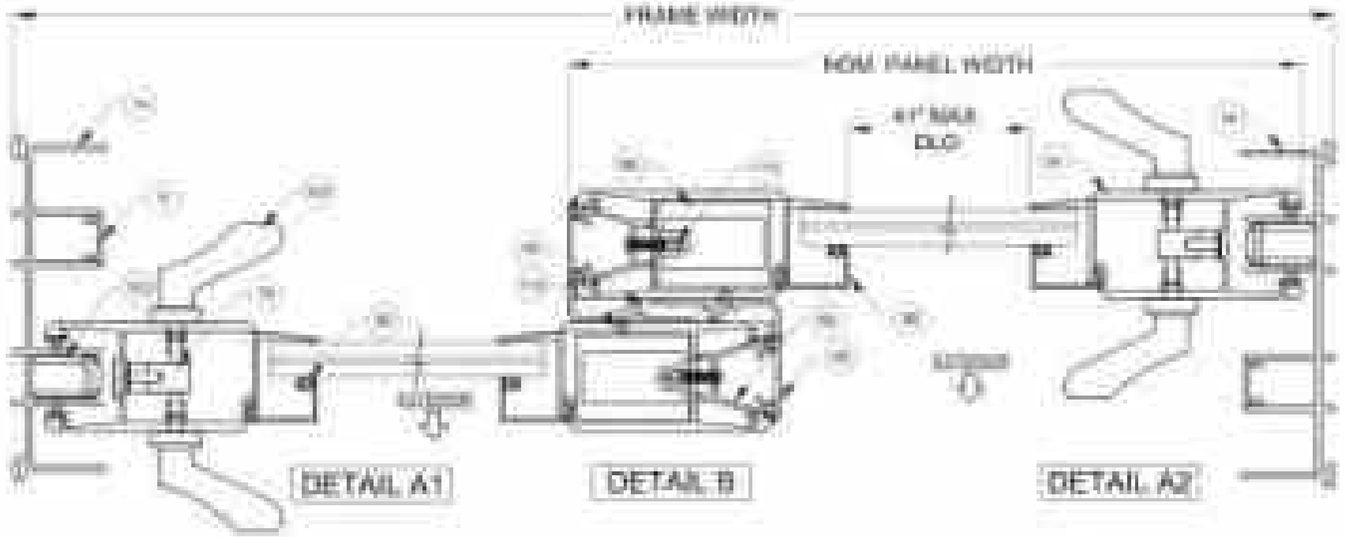

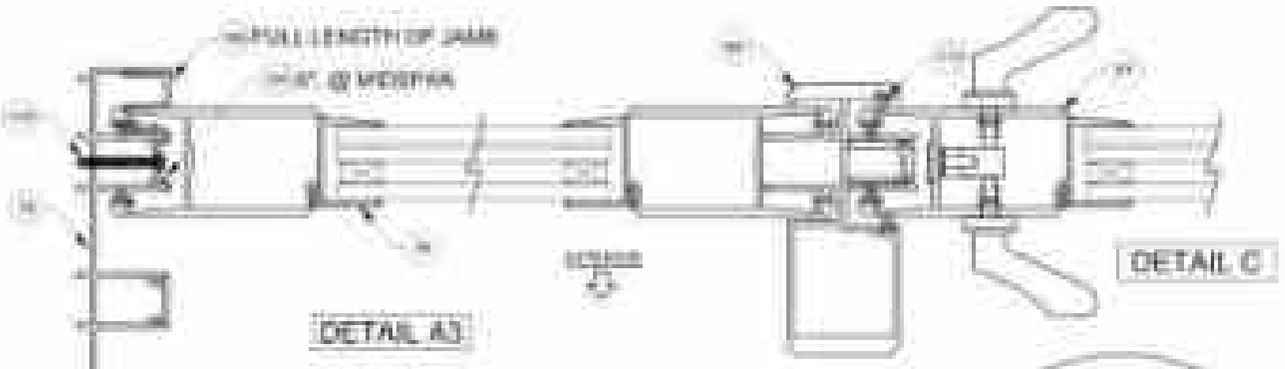


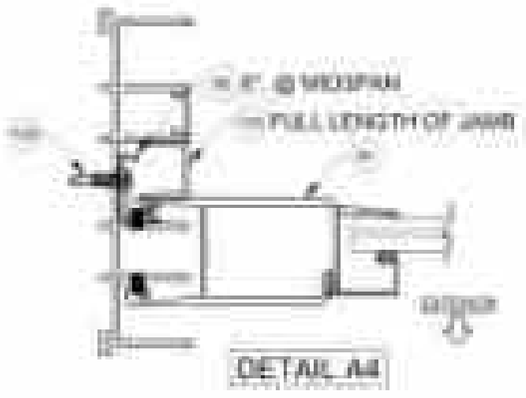

CORNER ASSEMBLY DETAILS

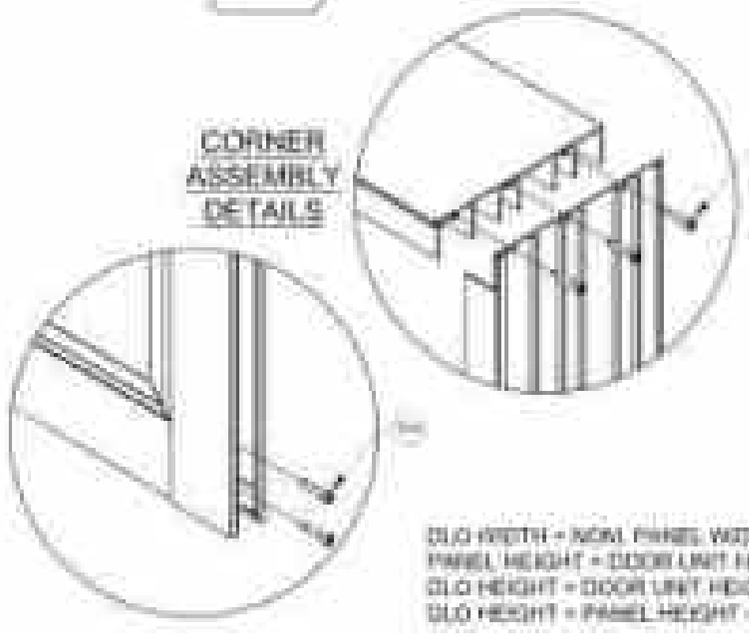

DLO WIDTH = NOM. PANEL WIDTH - 7"
PANEL HEIGHT = DOOR UNIT HEIGHT - 1-7/8"
DLO HEIGHT = DOOR UNIT HEIGHT - 15-1/8"
DLO HEIGHT = PANEL HEIGHT - 6-1/4"

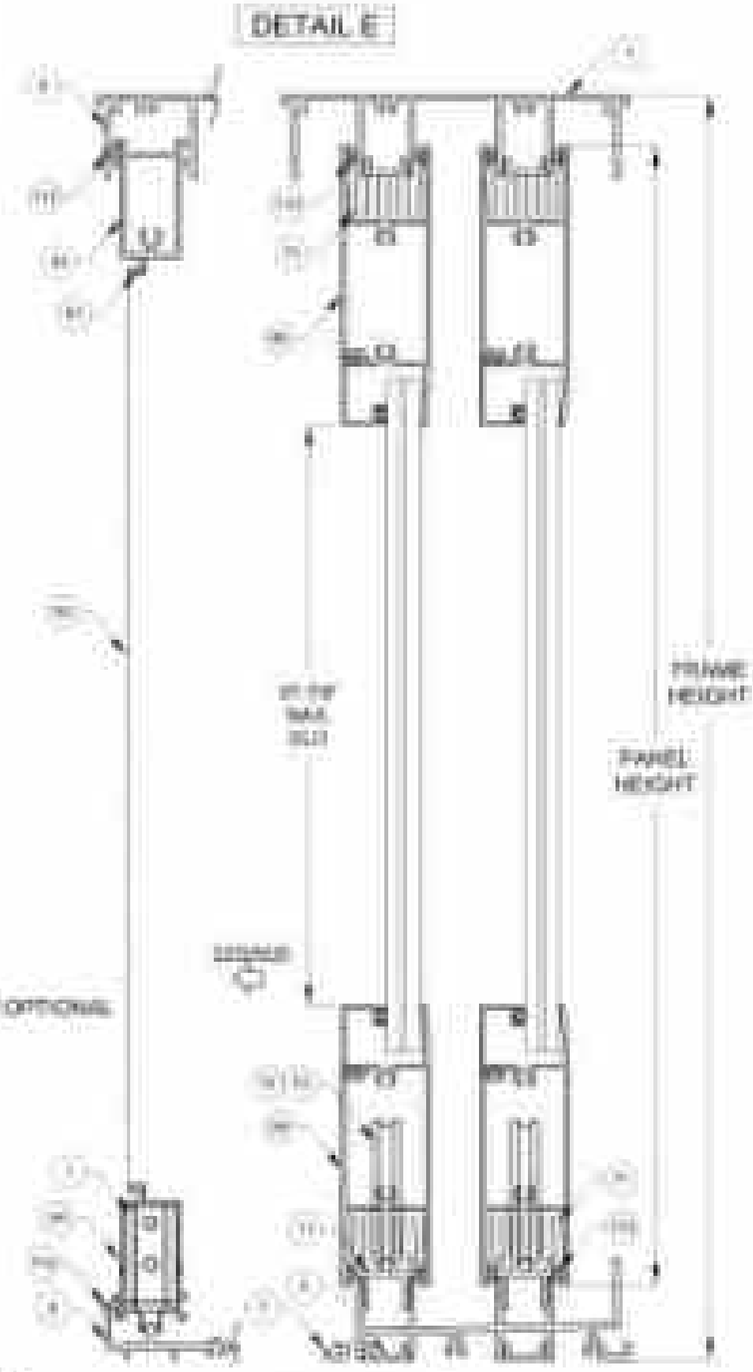

PRODUCT RENDERED
in complying with the Florida Building Code
NOA No. 25-0102.01
Expiration Date 03.24.2030
By
Miami-Dade Product Control

REVISED CO ADDRESS
JR - 120924

#	REVISION	DATE
1	REVISED ENGINEER	09-24-25

ALUMINUM SLIDING DOOR
ASSEMBLY CROSS SECTIONS

PGT



TABLE 2

ITEM	PART #	Description	Material
1	[illegible]	[illegible]	[illegible]
2	[illegible]	[illegible]	[illegible]
3	[illegible]	[illegible]	[illegible]
4	[illegible]	[illegible]	[illegible]
5	[illegible]	[illegible]	[illegible]
6	[illegible]	[illegible]	[illegible]
7	[illegible]	[illegible]	[illegible]
8	[illegible]	[illegible]	[illegible]
9	[illegible]	[illegible]	[illegible]
10	[illegible]	[illegible]	[illegible]
11	[illegible]	[illegible]	[illegible]
12	[illegible]	[illegible]	[illegible]
13	[illegible]	[illegible]	[illegible]
14	[illegible]	[illegible]	[illegible]
15	[illegible]	[illegible]	[illegible]
16	[illegible]	[illegible]	[illegible]
17	[illegible]	[illegible]	[illegible]
18	[illegible]	[illegible]	[illegible]
19	[illegible]	[illegible]	[illegible]
20	[illegible]	[illegible]	[illegible]
21	[illegible]	[illegible]	[illegible]
22	[illegible]	[illegible]	[illegible]
23	[illegible]	[illegible]	[illegible]
24	[illegible]	[illegible]	[illegible]
25	[illegible]	[illegible]	[illegible]
26	[illegible]	[illegible]	[illegible]
27	[illegible]	[illegible]	[illegible]
28	[illegible]	[illegible]	[illegible]
29	[illegible]	[illegible]	[illegible]
30	[illegible]	[illegible]	[illegible]
31	[illegible]	[illegible]	[illegible]
32	[illegible]	[illegible]	[illegible]
33	[illegible]	[illegible]	[illegible]
34	[illegible]	[illegible]	[illegible]
35	[illegible]	[illegible]	[illegible]
36	[illegible]	[illegible]	[illegible]
37	[illegible]	[illegible]	[illegible]
38	[illegible]	[illegible]	[illegible]
39	[illegible]	[illegible]	[illegible]
40	[illegible]	[illegible]	[illegible]
41	[illegible]	[illegible]	[illegible]
42	[illegible]	[illegible]	[illegible]
43	[illegible]	[illegible]	[illegible]
44	[illegible]	[illegible]	[illegible]
45	[illegible]	[illegible]	[illegible]
46	[illegible]	[illegible]	[illegible]
47	[illegible]	[illegible]	[illegible]
48	[illegible]	[illegible]	[illegible]
49	[illegible]	[illegible]	[illegible]
50	[illegible]	[illegible]	[illegible]
51	[illegible]	[illegible]	[illegible]
52	[illegible]	[illegible]	[illegible]
53	[illegible]	[illegible]	[illegible]
54	[illegible]	[illegible]	[illegible]
55	[illegible]	[illegible]	[illegible]
56	[illegible]	[illegible]	[illegible]
57	[illegible]	[illegible]	[illegible]
58	[illegible]	[illegible]	[illegible]
59	[illegible]	[illegible]	[illegible]
60	[illegible]	[illegible]	[illegible]
61	[illegible]	[illegible]	[illegible]
62	[illegible]	[illegible]	[illegible]
63	[illegible]	[illegible]	[illegible]
64	[illegible]	[illegible]	[illegible]
65	[illegible]	[illegible]	[illegible]
66	[illegible]	[illegible]	[illegible]
67	[illegible]	[illegible]	[illegible]
68	[illegible]	[illegible]	[illegible]
69	[illegible]	[illegible]	[illegible]
70	[illegible]	[illegible]	[illegible]
71	[illegible]	[illegible]	[illegible]
72	[illegible]	[illegible]	[illegible]
73	[illegible]	[illegible]	[illegible]
74	[illegible]	[illegible]	[illegible]
75	[illegible]	[illegible]	[illegible]
76	[illegible]	[illegible]	[illegible]
77	[illegible]	[illegible]	[illegible]
78	[illegible]	[illegible]	[illegible]
79	[illegible]	[illegible]	[illegible]
80	[illegible]	[illegible]	[illegible]
81	[illegible]	[illegible]	[illegible]
82	[illegible]	[illegible]	[illegible]
83	[illegible]	[illegible]	[illegible]
84	[illegible]	[illegible]	[illegible]
85	[illegible]	[illegible]	[illegible]
86	[illegible]	[illegible]	[illegible]
87	[illegible]	[illegible]	[illegible]
88	[illegible]	[illegible]	[illegible]
89	[illegible]	[illegible]	[illegible]
90	[illegible]	[illegible]	[illegible]
91	[illegible]	[illegible]	[illegible]
92	[illegible]	[illegible]	[illegible]
93	[illegible]	[illegible]	[illegible]
94	[illegible]	[illegible]	[illegible]
95	[illegible]	[illegible]	[illegible]
96	[illegible]	[illegible]	[illegible]
97	[illegible]	[illegible]	[illegible]
98	[illegible]	[illegible]	[illegible]
99	[illegible]	[illegible]	[illegible]
100	[illegible]	[illegible]	[illegible]
101	[illegible]	[illegible]	[illegible]
102	[illegible]	[illegible]	[illegible]
103	[illegible]	[illegible]	[illegible]
104	[illegible]	[illegible]	[illegible]
105	[illegible]	[illegible]	[illegible]
106	[illegible]	[illegible]	[illegible]
107	[illegible]	[illegible]	[illegible]
108	[illegible]	[illegible]	[illegible]
109	[illegible]	[illegible]	[illegible]
110	[illegible]	[illegible]	[illegible]

ITEMS # 3, 4, 6, 8, 10, 12, 13, 14, 17, 20, 30, 43, 44, 45, 52, 53, 58-60, 67, 81, 82, 84-86 & 108-110 ARE NOT USED AND ARE NOT PART OF THIS APPROVAL

TABLE 3

Material	Min. Y	Min. T
[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]
[illegible]	[illegible]	[illegible]

PRODUCT RENEWED
in complying with the Florida Building Code
NOA No. 23-0102.01
Expiration Date 02.24.2028
By [illegible]
Miami-Dade Product Control

REVISED CO ADDRESS
JR - 12/05/24

IGT

INTERNATIONAL GAME TECHNOLOGY PLC

[illegible]

[illegible]

[illegible]



1 2-TRACK HEAD



2 3-TRACK HEAD W/ SCREEN TRACK



7 2-TRACK SILL



8 3-TRACK SILL W/ SCREEN TRACK



10 HEAVY DUTY ASTRAGAL




11 TOP/BOTTOM RAIL



12 HEAVY DUTY STILE



5 FRAME SCREEN COVER

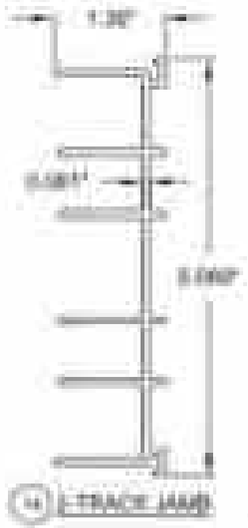


14 L-TRACK JAMB



11 SILL TRACK



13 3-TRACK JAMB W/ SCREEN TRACK

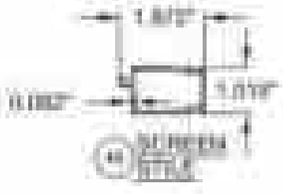

16 SCREEN STILE



17 SCREEN TOP RAIL



18 SCREEN BOTTOM RAIL



20 INTERLOCK ADAPTER



21 INTERLOCK SCREW COVER



22 REINFORCEMENT



23 GLAZING BEAD STOP



24 WIDE BEAD FIXED PANEL CLIP



19 FIXED PANEL CLIP



19A FIXED PANEL SET GASKET, 0.125"




26 SILL RISER FLAT, 1-1/4"



27 SILL RISER BOX, 1-1/2"




28 SILL RISER FLAT, 2-1/2"

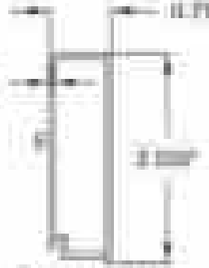

29 SILL RISER BOX, 2-1/2"




32 SILL RISER FLAT, 3-1/4"

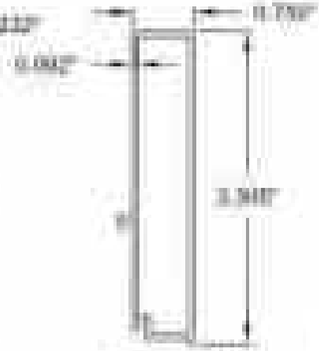

31 SILL RISER BOX, 3-1/4"



34 SILL RISER FLAT, 4"

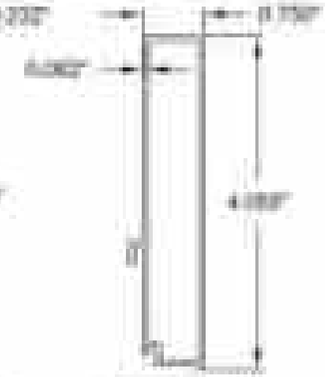

33 SILL RISER BOX, 4"

* NOT VALID FOR WATER INFILTRATION RESISTANCE REQUIREMENTS

PRODUCT RENDERED
in conformity with the Florida Building Code
NOA No. 25-0102.01
Expiration Date 02.24.2030
By
Miami-Dade Product Control

REVISED CO ADDRESS
JR - 12/05/24

1	12/05/24	JR
2	10.07.25	MM
3	10/27/25	MM

WINDSOR SHEET
SERIES 44 H.S. SLIDER
EXTRUSIONS
ALUMINUM SLIDING DOOR EXTRUSIONS

PGT
PGT Industries, Inc.
1070 Technology Drive
North Venice, FL 34275
(941) 486-0594

ARCHITECTURAL ROLLER
No. 30709
STATE OF FLORIDA
JOHN M. LEE, P.E.