

Canyon Ridge® Chevron Design 12A; Shown Custom Painted in Sherwin-Williams SW 7746 Rushing River with Mahogany Cladding, Mahogany Overlays and REC14 Window Design
Photo Credit: Andy Frame Photography

WINDCODE®

ARE YOU READY FOR THE STORM?

Florida Edition – Based on ASCE7-22 code

Clopay®

America's Favorite Garage Doors®

Clopay® WINDCODE® GARAGE DOORS

DETERMINE YOUR WINDCODE® RATING

Clopay assigns a WINDCODE® "W" rating to our doors based on code requirements determined by wind speed in miles per hour (MPH), home exposure and home structural type.

STEP 1:

– Determine the minimum wind speed (MPH) your door must meet or exceed from the map below, or go to ascehazardtool.org. Determine if wind-borne debris is applicable. See map below.


Please refer to Risk Category II when using ATC Wind Speed calculator for residential applications.

WIND-BORNE DEBRIS

The wind-borne debris region is also known as those areas that require the large missile impact rated windows. In Florida, being farther south and closer to the shoreline, it is more likely a home or building will be in the wind-borne debris region.

HIGH VELOCITY HURRICANE ZONE (HVHZ)

Miami-Dade and Broward Counties require all garage doors meet the large missile impact rating, regardless if the garage door has windows or not.

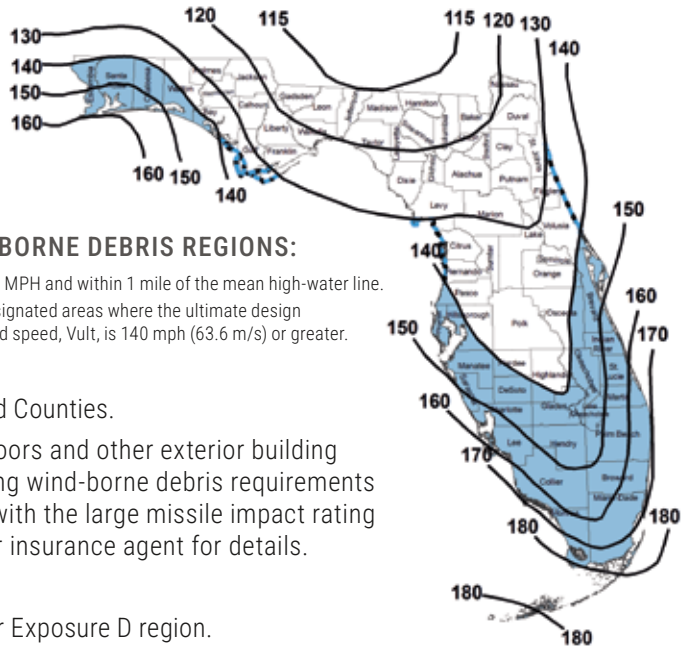

Standard windows are not available in Miami-Dade and Broward Counties.

Insurance companies sometimes give discounts for garage doors and other exterior building products that exceed the local building code, including meeting wind-borne debris requirements not mandated. This means that installing a new garage door with the large missile impact rating may reduce your insurance premiums. Please check with your insurance agent for details.

STEP 2:

– Determine if your home is in an Exposure B, Exposure C or Exposure D region.


Exposure B is defined as urban and suburban areas, wooded areas or other terrain with numerous closely spaced obstructions.

Exposure C is defined as open terrain with scattered obstructions including flat open ground and grasslands. All of Miami-Dade and Broward Counties are Exposure C, unless it meets Exposure D definition.

Exposure D is defined as being within 600 feet of the ocean front or other large body of water measuring at least 5,000 feet across. Contact building code official or DASMA Technical Data Sheet TDS-155x for design pressures.

STEP 3:

– Determine the structural type of your home.



STEP 4:

– Using wind speed (MPH), exposure and structural type, find your required design pressure and WINDCODE® "W" rating in the charts on page 3.

Note: It is important to also contact your homeowner's insurance company. Many insurance companies may require or encourage doors that are different than required by building code.

Additional requirements may be requested by building code officials such as flood resistant construction. Typically garage doors are NOT part of this requirement. See details in DASMA TDS-184.


HELPFUL LINKS:

For Florida building code and product approvals visit:
www.floridabuilding.org

For Dade product approvals visit:
www.miamidade.gov/building/product-control.asp

For Industry Technical Data Sheet (DASMA TDS) visit:
www.dasma.com/dasma-pages/DASMA-tehnical-data-sheets.asp

For easy access to up-to-date drawings and evaluation reports, visit: www.clopaydoor.com/residential/windcode-residential-information/residential-windcode-calculator

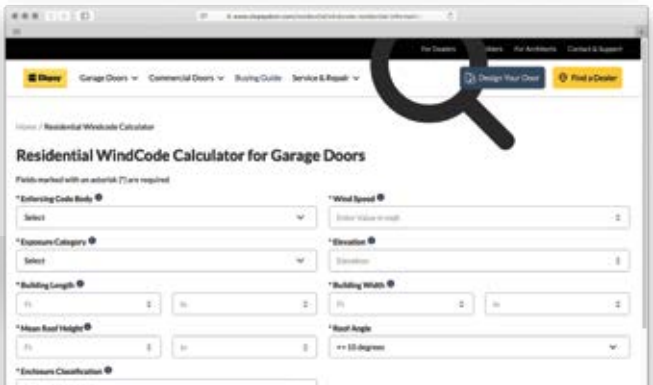

DESIGN PRESSURES

The design wind load pressure rating of a door is expressed in PSF (pounds per square foot). The design pressure of the door must equal or exceed the design pressure for the garage door opening in which a door is to be installed. Design pressure has positive and negative values.

GARAGE DOOR WIND LOAD GUIDE – VALUES IN PSF

Mean Roof Height	Door Size	Based on the 8th Edition Florida Building Code & ASCE7-22, Exposure B, 115 – 200 MPH Ultimate Design Wind Speed, MPH (V_ult)									
Ultimate Wind Speed →		115 MPH	120 MPH	130 MPH	140 MPH	150 MPH	160 MPH	170* MPH	175** MPH	180 MPH	190 MPH	200 MPH
15 Feet Single Story	Single 9' × 7'	10.3 −11.6	11.2 −12.7	13.2 −14.9	15.2 −17.1	17.5 −19.8	19.9 −22.6	22.6 −25.6	23.9 −27.0	25.1 −28.4	28.0 −31.7	31.2 −35.3
	Double 16' × 7'	9.8 −11.0	10.7 −12.0	12.7 −14.1	14.5 −16.2	16.7 −18.6	19.1 −21.3	21.6 −24.1	22.8 −25.4	24.0 −26.7	26.8 −29.9	29.8 −33.3
25 Feet Double Story	Single 9' × 7'	11.8 −13.3	12.9 −14.6	15.1 −17.1	17.4 −19.6	20.0 −22.7	22.8 −25.9	25.9 −29.3	27.4 −30.9	28.8 −32.5	32.1 −36.3	35.7 −40.4
	Double 16' × 7'	11.3 −12.6	12.3 −13.7	14.6 −16.2	16.6 −18.5	19.2 −21.3	21.9 −24.4	24.8 −27.6	26.2 −29.1	27.5 −30.6	30.7 −34.3	34.2 −38.2
Equivalent Nominal Wind Speed →		89 MPH	93 MPH	101 MPH	108 MPH	116 MPH	124 MPH	132 MPH	136 MPH	139 MPH	147 MPH	155 MPH
Mean Roof Height	Door Size	Based on the 8th Edition Florida Building Code & ASCE7-22, Exposure C, 115 – 200 MPH Ultimate Design Wind Speed, MPH (V_ult)									
Ultimate Wind Speed →		115 MPH	120 MPH	130 MPH	140 MPH	150 MPH	160 MPH	170* MPH	175** MPH	180 MPH	190 MPH	200 MPH
15 Feet Single Story	Single 9' × 7'	15.2 −17.2	16.6 −18.8	19.5 −22.0	22.4 −25.3	25.8 −29.2	29.4 −33.3	33.4 −37.8	35.2 −39.8	37.0 −41.9	41.4 −46.7	46.0 −52.0
	Double 16' × 7'	14.5 −16.2	15.9 −17.7	18.8 −20.8	21.4 −23.8	24.7 −27.5	28.2 −31.5	31.9 −35.6	33.7 −37.5	35.5 −39.4	39.6 −44.2	44.0 −49.1
25 Feet Double Story	Single 9' × 7'	16.9 −19.2	18.5 −20.9	21.7 −24.6	25.0 −28.2	28.8 −32.5	32.8 −37.1	37.3 −42.1	39.3 −44.4	41.3 −46.7	46.2 −52.1	51.3 −58.1
	Double 16' × 7'	16.2 −18.1	17.7 −19.7	20.9 −23.2	23.9 −26.6	27.5 −30.6	31.5 −35.1	35.6 −39.7	37.6 −41.9	39.6 −44.0	44.1 −49.3	49.1 −54.8
Equivalent Nominal Wind Speed →		89 MPH	93 MPH	101 MPH	108 MPH	116 MPH	124 MPH	132 MPH	136 MPH	139 MPH	147 MPH	155 MPH
Mean Roof Height	Door Size	Based on the 8th Edition Florida Building Code & ASCE7-22, Exposure D, 115 – 200 MPH Ultimate Design Wind Speed, MPH (V_ult)									
Ultimate Wind Speed →		115 MPH	120 MPH	130 MPH	140 MPH	150 MPH	160 MPH	170 MPH	175 MPH	180 MPH	190 MPH	200 MPH
15 Feet Single Story	Single 9' × 7'	18.4 −20.9	20.1 −22.8	23.7 −26.8	27.2 −30.7	31.3 −35.4	35.7 −40.4	40.6 −45.9	42.8 −48.4	45.0 −50.9	50.3 −56.7	55.9 −63.2
	Double 16' × 7'	17.6 −19.7	19.3 −21.5	22.8 −25.3	26.0 −29.0	30.0 − 33.4	34.3 −38.2	38.8 −43.2	40.9 −45.6	43.1 −47.9	48.1 −53.7	53.5 −59.7
25 Feet Double Story	Single 9' × 7'	20.2 −22.9	22.1 −25.0	25.9 −29.3	29.8 −33.6	34.3 −38.8	39.1 −44.3	44.4 −50.2	46.9 −53.0	49.3 −55.7	55.1 −62.1	61.2 −69.2
	Double 16' × 7'	19.3 −21.6	21.1 −23.5	25.0 −27.7	28.5 −31.7	32.8 −36.5	37.5 −41.9	42.5 −47.3	44.8 −49.9	47.2 −52.5	52.6 −58.8	58.6 −65.4
Equivalent Nominal Wind Speed →		89 MPH	93 MPH	101 MPH	108 MPH	116 MPH	124 MPH	132 MPH	136 MPH	139 MPH	147 MPH	155 MPH

**Broward County is 170 MPH, Exposure C for most residential buildings. **Miami-Dade County is 175 MPH, Exposure C for most residential buildings.*
The design pressures listed are the minimum required. Recommended WINDCODE® levels typically meet or exceed the required design pressures.
MPH = miles per hour PSF = pounds per square foot

WINDCODE® "W" RATING GUIDE

EXPOSURE B										
Structural Type	115 MPH	120 MPH	130 MPH	140 MPH	150 MPH	160 MPH	170 MPH	180 MPH	190 MPH	200 MPH
One Story	W1	W2	W3	W3	W4	W5	W5	W6	W6	W7
Two Story	W1	W2	W3	W3	W4	W5	W5	W6	W6	W7
EXPOSURE C										
Structural Type	115 MPH	120 MPH	130 MPH	140 MPH	150 MPH	160 MPH	170* MPH	175** MPH	180 MPH	190 MPH	200 MPH
One Story	W2	W3	W3	W4	W5	W5/W6	W6/W7	W6/W7	W7	W7	W8
Two Story	W3	W3	W4	W5	W5/W6	W6	W6/W7	W7/W8	W7/W8	W8	W9
EXPOSURE D											
Structural Type	115 MPH	120 MPH	130 MPH	140 MPH	150 MPH	160 MPH	170 MPH	175 MPH	180 MPH	190 MPH	200 MPH
One Story	W3	W3/W4	W4/W5	W5	W6	W6	W7	W7/W8	W7/W8	W8	W9
Two Story	W3/W4	W4/W5	W4/W5	W5/W6	W6	W7/W8	W7/W8	W8	W8	W9	W9

**Broward County is 170 MPH, Exposure C for most residential buildings. **Miami-Dade County is 175 MPH, Exposure C for most residential buildings.*
MPH = miles per hour

WINDCODE® GARAGE DOORS


STORM READY® – NO POSTS, PINS OR EXTRA SETUP. JUST CLOSE AND LOCK YOUR DOOR.

WINDCODE® BENEFITS

- No attachments to the floor or structure required
- No extra posts, pins, parts or setup necessary
- Storm ready, simply close and lock your door

STANDARD GARAGE DOOR	WINDCODE® GARAGE DOORS



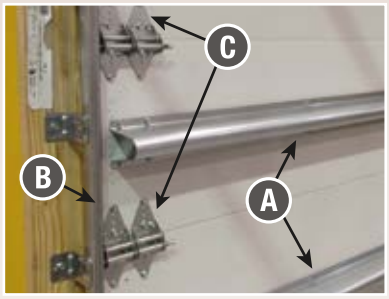

- **A** Patented T-Strut design strengthens door
- **B** Heavy-duty commercial grade track provides additional strength and durability
- **C** Commercial-duty steel rollers and hardware withstand more severe wind pressures

CLOPAY'S WINDCODE® GARAGE DOORS

Clopay's WindCode® garage doors are designed to help withstand high winds resulting from tropical storms and other strong wind-related weather events. This user-friendly system assists you in selecting the right garage door for your area and building structure.

DESIGN OPTIONS

Clopay's WindCode® product offering has the widest range of panel styles, colors and window designs available today. Accent the design of your home while providing the protection you need against strong winds. Choose from various panel designs and Designer or Decorative windows for that extra curb appeal. Impact-resistant windows are available in many different colors and wind load levels.

DESIGNED AND TESTED TO WITHSTAND STRONG WINDS

All Clopay WindCode® doors have been designed and tested to meet various code requirements. Additional interior horizontal steel reinforcement along with increased hardware and springing components are installed so your door is ready when a storm hits. No posts or pins are required to secure your door if you are not there. Just lock your door.

OPTIONS AND UPGRADES

HEAVY-DUTY HARDWARE WITH QUIETFLEX™ HINGES

- Quieter, longer-lasting nylon ball-bearing rollers
- Quieter, stronger, wider and longer-lasting heavy-duty QuietFlex™ 14 gauge hinges



intellicore® insulation technology

COOLER QUIETER STRONGER

Garage doors featuring Intellicore® insulation technology represent the ultimate smart choice for homeowners. Clopay's Intellicore® insulation is a proprietary polyurethane foam that is injected into a garage door, expanding to fill the entire structure. The result is a door with incredible strength and durability. Its dense insulation also produces a quieter door, while its industry-leading R-values (up to 20.4) provide year-round comfort and improved energy efficiency.

Look for the Intellicore® insulation technology icon throughout this brochure on select door models.

CANYON RIDGE® Modern

HANDCRAFTED 4-LAYER CONSTRUCTION





Canyon Ridge® Modern Plank Design shown in Dark Finish

Canyon Ridge® Modern door designs feature key elements of contemporary architecture: clean, horizontal lines with mid-century appeal, sleek window styles and aluminum accents.

STYLE AND CONSTRUCTION

- Plank design: Faux-wood doors with Intellicore® polyurethane insulation (R-value 20.4).
- Metal Inlay design: Faux-wood doors with Intellicore® polyurethane insulation (R-value 18.4).
- Black Laminated Glass Inlay design: Faux-wood doors with Intellicore® polyurethane insulation (R-value 18.4).
- Full-View design: Faux-wood doors with Intellicore® polyurethane insulation (R-value 6.3).
- Replaceable vinyl bottom weatherseal in a corrosion-resistant retainer helps seal out the elements.

Calculated door section R-value is in accordance with DASMA TDS-163.

MATERIAL DESIGN OPTIONS


Clear Cypress | Mahogany

FINISHING AND CARE: *Proper care and maintenance are imperative for long-term performance and appearance of Canyon Ridge® garage doors. Periodic inspection and maintenance of the composite cladding and overlays are required. Complete finishing and maintenance instructions are provided with the door and are also available from your Clopay Dealer or online at www.clopaydoor.com.*


COLOR OPTIONS


Natural Finish | Medium Finish | Dark Finish | Walnut Finish | Slate Finish | Bronze Finish* | Charcoal Finish*


Espresso Finish | Black Finish* | White Finish* | Primed (No Finish)

**Bronze, Charcoal, Black and White Finish available only on Mahogany composite cladding and overlays.*
Doors can be ordered primed for those homeowners wishing to custom paint or stain their doors. Door stain color will vary slightly within a door due to the finishing process. Due to the printing process, colors may vary.

DOOR DESIGNS *Custom designs available, contact Clopay for availability.*


Plank Design | Metal (Aluminum) Inlay Design | Black Laminated Glass Inlay Design | Full-View Design

Plank designs are available with 3" or 6" planks.

WINDOW OPTIONS


14" × 6" | 35" × 6"


Available only on Plank door designs. Both available on single car and double car doors.

PLANK WINDOW CONFIGURATIONS


14" × 6" *Windows Down Right Side* | 35" × 6" *Windows in All Panel Locations*

Note: Configurations are illustrated from outside garage. When ordering, window locations are identified from inside garage looking out. Please keep in mind to avoid windows ordered in incorrect location. Additional configurations available. See your Clopay Dealer for more information.

SPECIALTY GLASS OPTIONS


Clear | Frosted | Obscure


Rain | Clear Polycarbonate | Matte Polycarbonate

Windows are available insulated in clear, frosted, obscure and rain.
Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance.

WINDCODE® AVAILABILITY CHART

Model CRM — Common Door Widths	W1	W3	W4	W5	W6		W7	W8	
8', 9' Wide Door	S *+13/–15 PSF*	SELECT W6	SELECT W6	SELECT W6	PLANK/FULL-VIEW F T W S *+38/–42 PSF*	METAL & GLASS INLAY F T W S *+38/–44 PSF*	SELECT W8	PLANK/FULL-VIEW F T W S *+54/–62 PSF*	METAL & GLASS INLAY F W *+54/–60 PSF*
10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W6	SELECT W6	SELECT W6	PLANK/FULL-VIEW F T W S *+38/–42 PSF*	METAL & GLASS INLAY F T W S *+38/–42 PSF*	SELECT W8	PLANK/FULL-VIEW F T W S *+50/–56 PSF*	METAL & GLASS INLAY F W *+46/–52 PSF*
16' Wide Door	S *+12.5/–14 PSF*	SELECT W6	SELECT W6	SELECT W6	PLANK/FULL-VIEW F T W S *+38/–42 PSF*	METAL & GLASS INLAY F T W S *+38/–42 PSF*	SELECT W8	PLANK/FULL-VIEW F T W S *+46/–52 PSF*	METAL & GLASS INLAY F W *+46/–52 PSF*
18' Wide Door	S *+12.5/–14 PSF*	SELECT W6	SELECT W6	SELECT W6	PLANK/FULL-VIEW F T *+38/–42 PSF*	METAL & GLASS INLAY F T W S *+38/–42 PSF*			

S Standard Windows Available
W Patented Impact Windows Available
D Dade County Approved
Impact Rated
F Florida Approved
T Texas Department of Insurance Approved

For W6 –W8 doors over 10'2" wide, add 2" to the door width.


CANYON RIDGE® Carriage House

5-LAYER CONSTRUCTION

HANDCRAFTED 5-LAYER CONSTRUCTION



1. COMPOSITE OVERLAY
2. COMPOSITE CLADDING
3. STEEL
4. 2" INTELLICORE® POLYURETHANE INSULATION
5. STEEL

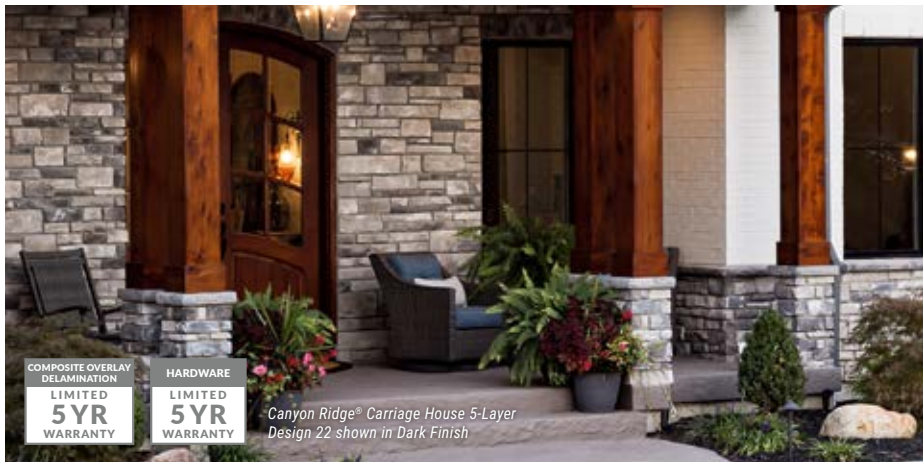

Canyon Ridge® Carriage House 5-Layer Design 22 shown in Dark Finish

Canyon Ridge® Carriage House 5-Layer doors are constructed of durable, low-maintenance steel and composite. These faux-wood alternatives offer the best of both worlds—the realism and beauty of a natural stained-wood appearance combined with the strength and energy efficiency of insulated steel.

STYLE AND CONSTRUCTION

- 5-layer construction, 2" thick Intellicore® polyurethane insulation (R-value 20.4).
- Attractive beveled edge, clip-in grilles are removable for easy cleaning.
- Replaceable vinyl bottom weatherseal in a corrosion-resistant retainer helps seal out the elements.
- 10-ball nylon rollers for quiet operation.
- Heavy-duty 14 gauge steel hinges for long-lasting performance.

Calculated door section R-value is in accordance with DASMA TDS-163.

DOOR DESIGNS

Custom designs available, contact Clopay for availability.

SERIES 1


Design 01


Design 11


Design 12


Design 13

SERIES 2


Design 21


Design 22


Design 23

SERIES 3


Design 31


Design 32


Design 33


Design 34


Design 35


Design 36


Design 37


Design 38

Doors shown in Dark Finish with Clear Cypress cladding and Clear Cypress overlays. Design 01 does not have an overlay.

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
Model CAN	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F S *+28/–29 PSF*	F S *+30/–32 PSF*	(S) F T D W S *+38/–44 PSF*	SELECT W8	(S) F D W *+54/–60 PSF*
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S *+25.5/–25.5 PSF*	F S *+30/–30 PSF*	TAPERED STRUT (S) F T D W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT (S) F D W *+46/–52 PSF*
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S *+25.5/–25.5 PSF*	F S *+30/–30 PSF*	TAPERED STRUT (S) F T D W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT (S) F D W *+46/–52 PSF*
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F *+25/–25 PSF*	SELECT W6	TAPERED STRUT (S) F T D W S *+38/–42 PSF*		

S Standard Windows Available
(S) Impact Rated
W Patented Impact Windows Available
F Florida Approved
D Dade County Approved
T Texas Department of Insurance Approved

For W6 –W8 doors over 10'2" wide, add 2" to the door width.

CANYON RIDGE® Carriage House

5-LAYER CONSTRUCTION



MATERIAL DESIGN OPTIONS

CLADDING MATERIALS



Clear Cypress



Mahogany

OVERLAY MATERIALS



Clear Cypress



Mahogany

Cladding and overlay material options may be mixed and matched.

FINISHING AND CARE: *Proper care and maintenance are imperative for long-term performance and appearance of Canyon Ridge® garage doors. Periodic inspection and maintenance of the composite cladding and overlays are required. Complete finishing and maintenance instructions are provided with the door and are also available from your Clopay Dealer or online at www.clopaydoor.com.*

COLOR OPTIONS



Natural Finish



Medium Finish



Dark Finish



Walnut Finish



Slate Finish



Bronze Finish*



Charcoal Finish*



Espresso Finish



Black Finish*



White Finish*



Primed
(No Finish)

**Bronze, Charcoal, Black and White Finish available only on Mahogany cladding and overlays.*
Two-tone doors are available. To see all available options go to: ezdoor.clopay.com.
Doors can be ordered primed for those homeowners wishing to custom paint or stain their doors. Door stain color will vary slightly within a door due to the finishing process. Due to the printing process, colors may vary.

WINDOW OPTIONS



REC11



REC13



REC14



SQ23



SQ24



ARCH1



ARCH13



ARCH14



ARCH3



ARCH4


Window grilles are Clear Cypress texture. Windows not available on Designs 01, 31, 32, 33, 34, 35, 36, 37 and 38. Double door designs also available.
Standard windows available on the following widths only: 6'2", 8'0", 9'0", 10'0", 10'2", 12'0", 12'2", 13'6", 15'0", 15'2", 15'6", 15'8", 16'0", 16'2", 18'0", 18'2", 20'0", 20'2".
Impact rated windows available on the following widths only: 8'0", 9'0", 10'0", 12'2", 16'2", 18'2". To view additional designs, windows and top sections available, please visit www.clopaydoor.com.

Impact rated windows available.


SPECIALTY GLASS OPTIONS



Clear



Frosted



Seeded




Obscure



Rain



Clear
Polycarbonate



Matte
Polycarbonate

Windows are available single pane or insulated in clear, frosted, seeded, obscure and rain designs.
Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance. Additional charges of optional glass apply.

CANYON RIDGE® Carriage House

4-LAYER CONSTRUCTION

HANDCRAFTED 4-LAYER CONSTRUCTION



1. COMPOSITE OVERLAY
2. STEEL WITH ULTRA-GRAIN® FINISH (SHOWN) OR SOLID COLOR STEEL
3. 2" INTELLICORE® POLYURETHANE INSULATION
4. STEEL



Canyon Ridge® Carriage House 4-Layer Design 21 shown in Slate Finish with SQ24 Windows

Photo Credit: Living Stone Design + Build, Ryan Theede Photography

Canyon Ridge® Carriage House 4-Layer base doors are available in Ultra-Grain® finish and solid colors for the perfect complement to your home. The overlay materials are molded from actual wood to reproduce the natural texture and grain patterns of the species that they emulate. The combination of steel and overlay creates a distinct look.

STYLE AND CONSTRUCTION

- 4-layer construction, 2" thick Intellicore® polyurethane insulation (R-value 18.4).
- Attractive beveled edge, clip-in grilles are removable for easy cleaning.
- Replaceable vinyl bottom weatherseal in a corrosion-resistant retainer helps seal out the elements.
- 10-ball nylon rollers for quiet operation.
- Heavy-duty 14 gauge steel hinges for long-lasting performance.

Calculated door section R-value is in accordance with DASMA TDS-163.

DOOR DESIGNS

Custom designs available, contact Clopay for availability.

SERIES 1


Design 11


Design 12


Design 13

SERIES 2


Design 21


Design 22


Design 23

SERIES 3


Design 31


Design 32


Design 33


Design 34


Design 35


Design 36


Design 37


Design 38

All doors shown in Medium Finish with Clear Cypress overlays.

WINDCODE® AVAILABILITY CHART

Model CAN	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F S *+28/–29 PSF*	F S *+30/–32 PSF*	(S) F T D W S *+38/–44 PSF*	SELECT W8	(S) F D W *+54/–60 PSF*
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S *+25.5/–25.5 PSF*	F S *+30/–30 PSF*	TAPERED STRUT (S) F T D W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT (S) F D W *+46/–52 PSF*
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S *+25.5/–25.5 PSF*	F S *+30/–30 PSF*	TAPERED STRUT (S) F T D W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT (S) F D W *+46/–52 PSF*
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F *+25/–25 PSF*	SELECT W6	TAPERED STRUT (S) F T D W S *+38/–42 PSF*		

S Standard Windows Available
(S) Impact Rated
W Patented Impact Windows Available
F Florida Approved
D Dade County Approved
T Texas Department of Insurance Approved

For W6 –W8 doors over 10'2" wide, add 2" to the door width.

CANYON RIDGE® Carriage House

4-LAYER CONSTRUCTION



MATERIAL DESIGN OPTIONS

STEEL BASE MATERIAL



Ultra-Grain® Finish Clear Cypress or Solid Color Steel

Composite cladding is not present on Carriage House 4-Layer doors.

OVERLAY MATERIALS



Clear Cypress | Mahogany

FINISHING AND CARE: *Proper care and maintenance are imperative for long-term performance and appearance of Canyon Ridge® garage doors. Periodic inspection and maintenance of the composite cladding and overlays are required. Complete finishing and maintenance instructions are provided with the door and are also available from your Clopay Dealer or online at www.clopaydoor.com.*

COLOR OPTIONS



Natural Finish | Medium Finish | Dark Finish | Walnut Finish | Slate Finish | Bronze Finish*



Charcoal Finish* | Espresso Finish | Black Finish* | White Finish* | Primed (No Finish)

**Bronze, Charcoal, Black and White Finish available only on Mahogany cladding and overlays.*
Two-tone doors are available. To see all available options go to: ezdoor.clopay.com.
Steel surfaces have woodgrain texture.
Doors can be ordered primed for those homeowners wishing to custom paint or stain their doors. Note: Primed solid steel base is brown color. Door stain color will vary slightly within a door due to the finishing process. Due to the printing process, colors may vary.

WINDOW OPTIONS



REC11 | REC13 | REC14 | SQ23 | SQ24



ARCH1 | ARCH13 | ARCH14 | ARCH3 | ARCH4

Window grilles are Clear Cypress texture. Windows not available on Designs 31, 32, 33, 34, 35, 36, 37 and 38. Double door designs also available.
Standard windows available on the following widths only: 6'2", 8'0", 9'0", 10'0", 10'2", 12'0", 12'2", 13'6", 15'0", 15'2", 15'6", 15'8", 16'0", 16'2", 18'0", 18'2", 20'0", 20'2".
Impact rated windows available on the following widths only: 8'0", 9'0", 10'0", 12'2", 16'2", 18'2". To view additional designs, windows and top sections available, please visit www.clopaydoor.com.

Impact rated windows available.

SPECIALTY GLASS OPTIONS




Clear | Frosted | Seeded | Obscure | Rain | Clear Polycarbonate | Matte Polycarbonate

Windows are available single pane or insulated in clear, frosted, seeded, obscure and rain designs.
Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance. Additional charges of optional glass apply.

CANYON RIDGE® Elements

HANDCRAFTED 4-LAYER CONSTRUCTION

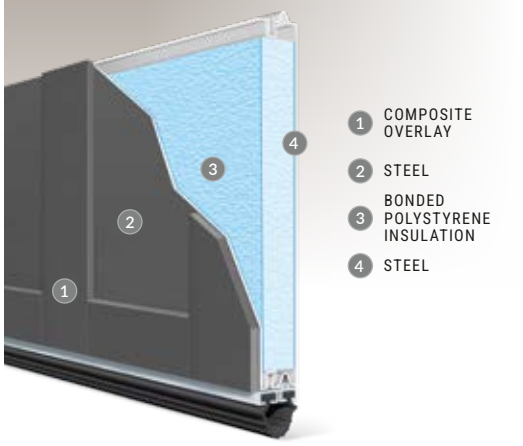



Canyon Ridge® Elements
Design 12 shown in Black Finish with REC13 Windows

The introductory model in our top-selling line of faux-wood carriage house doors, Canyon Ridge® Elements pairs moisture-resistant composite overlays featuring clean, square "Shaker" edges and durable, insulated steel to give you the look of painted wood without the upkeep. Choose from 13 designs in 6 finishes including dramatic dark colors like Charcoal, Black and Bronze.

STYLE AND CONSTRUCTION

- 4-layer, steel and composite overlay doors with 1-3/8" bonded polystyrene insulation (6.5 R-value).
- Attractive beveled edge, clip-in grilles are removable for easy cleaning.
- Replaceable vinyl bottom weatherseal in a corrosion-resistant retainer helps seal out the elements.
- 10-ball nylon rollers for quiet operation.
- Heavy-duty 14 gauge steel hinges for long-lasting performance.

Calculated door section R-value is in accordance with DASMA TDS-163.

DOOR DESIGNS

Custom designs available, contact Clopay for availability.

SERIES 1


Design 11


Design 12


Design 13

SERIES 3


Design 31


Design 32


Design 33


Design 34

SERIES 2


Design 21


Design 22


Design 23


Design 35


Design 36


Design 38

All doors designs shown in Charcoal with woodgrain classic steel base and overlays

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
Model CED	8', 9' Wide Door	S *+13/–15 PSF*						
	10', 12' Wide Door	S *+12.5/–14 PSF*						
	16' Wide Door	S *+12.5/–14 PSF*						
	18' Wide Door	S *+12.5/–14 PSF*						

S Standard Windows Available
(S) Impact Rated
W Patented Impact Windows Available
F Florida Approved
D Dade County Approved
T Texas Department of Insurance Approved

CANYON RIDGE® Elements



MATERIAL DETAIL




Woodgrain Classic surface texture on base steel and composite overlay.

COLOR OPTIONS



Overlay and steel base colors can be mixed to achieve desired look. Due to the printing process, colors may vary.

WINDOW OPTIONS

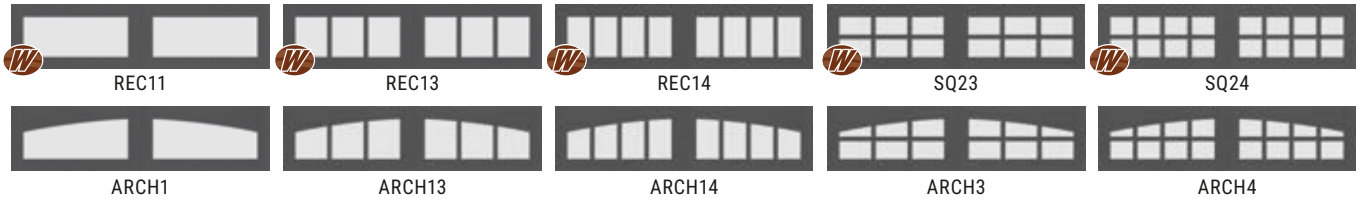

Window grilles are Woodgrain Classic texture. Insulated glass not available. Windows not available on Designs 31, 32, 33, 34, 35, 36 and 38.
Standard windows available on the following widths only: 8'0", 9'0", 10'0", 12'0", 13'0", 13'6", 16'0", 17'0", 18'0".
Impact rated windows available on the following widths only: 8'0", 9'0", 10'0", 12'2", 16'2", 18'2". To view additional designs, windows and top sections available, please visit www.clopaydoor.com.

Impact rated windows available.

SPECIALTY GLASS OPTIONS



Windows are available single pane or insulated in clear, frosted, seeded, obscure and rain designs.
Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance. Additional charges of optional glass apply.

CANYON RIDGE® Chevron

HANDCRAFTED 5-LAYER CONSTRUCTION



1. COMPOSITE OVERLAY
2. COMPOSITE CLADDING
3. STEEL
4. 2" INTELLICORE POLYURETHANE INSULATION
5. STEEL



Canyon Ridge® Chevron Design 12A; Shown Custom Painted in Sherwin-Williams SW 7746 Rushing River with REC14 Windows
Photo Credit: Andy Frame Photography

Chevron patterns have a modern, geometric feel for a timeless door that adds a hint of old-world charm and character to your home's exterior. Choose from four designs of diagonally placed planks constructed in low-maintenance faux wood composite cladding that looks and feels like real wood.


STYLE AND CONSTRUCTION


- 5-layer construction, 2" thick Intellicore® polyurethane insulation (R-value 20.4).
- Attractive beveled edge, clip-in grilles are removable for easy cleaning.
- Replaceable vinyl bottom weatherseal in a corrosion-resistant retainer helps seal out the elements.
- 10-ball nylon rollers for quiet operation.
- Heavy-duty 14 gauge steel hinges for long-lasting performance.


Calculated door section R-value is in accordance with DASMA TDS-163.


DOOR DESIGNS


Custom designs available, contact Clopay for availability.



Design 11V



Design 12V



Design 13V


Design 31V


Design 32V


Design 33V



Design 36V


Design 37V

CLADDING DESIGN OPTIONS


Option V


Option A


Option D


Option U

Doors shown in Bronze Finish with Mahogany cladding and Mahogany overlays.

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
Model CAN	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F S *+28/–29 PSF*	F S *+30/–32 PSF*	F T D W S *+38/–44 PSF*	SELECT W8	F D W *+54/–60 PSF*
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S *+25.5/–25.5 PSF*	F S *+30/–30 PSF*	TAPERED STRUT F T D W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT F D W *+46/–52 PSF*
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S *+25.5/–25.5 PSF*	F S *+30/–30 PSF*	TAPERED STRUT F T D W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT F D W *+46/–52 PSF*
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F *+25/–25 PSF*	SELECT W6	TAPERED STRUT F T D W S *+38/–42 PSF*		

S Standard Windows Available
Impact Rated
W Patented Impact Windows Available
F Florida Approved
D Dade County Approved
T Texas Department of Insurance Approved

For W6 –W8 doors over 10'2" wide, add 2" to the door width.

CANYON RIDGE® Chevron



MATERIAL DESIGN OPTIONS

CLADDING MATERIALS



Clear Cypress



Mahogany

OVERLAY MATERIALS



Clear Cypress



Mahogany

Cladding and overlay material options may be mixed and matched.

FINISHING AND CARE: *Proper care and maintenance are imperative for long-term performance and appearance of Canyon Ridge® garage doors. Periodic inspection and maintenance of the composite cladding and overlays are required. Complete finishing and maintenance instructions are provided with the door and are also available from your Clopay Dealer or online at www.clopaydoor.com.*

COLOR OPTIONS



Natural Finish



Medium Finish



Dark Finish



Walnut Finish



Slate Finish



Bronze Finish*



Charcoal Finish*



Espresso Finish



Black Finish*




White Finish*



Primed
(No Finish)

**Bronze, Charcoal, Black and White Finish available only on Mahogany cladding and overlays.*
Two-tone doors are available. To see all available options go to: ezdoor.clopay.com.
Doors can be ordered primed for those homeowners wishing to custom paint or stain their doors. Door stain color will vary slightly within a door due to the finishing process. Due to the printing process, colors may vary.

WINDOW OPTIONS

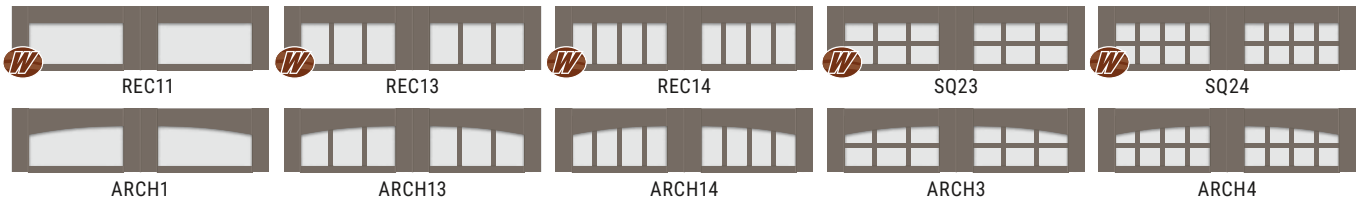


Window grilles are Mahogany texture. Windows not available on Designs 31, 32, 33, 36 and 37. Double door designs also available.
Standard windows available on the following widths only: 6'2", 8'0", 9'0", 10'0", 10'2", 12'0", 12'2", 13'6", 15'0", 15'2", 15'6", 15'8", 16'0", 16'2", 18'0", 18'2", 20'0", 20'2".
Impact rated windows available on the following widths only: 8'0", 9'0", 10'0", 12'2", 16'2", 18'2". To view additional designs, windows and top sections available, please visit www.clopaydoor.com.

Impact rated windows available.

SPECIALTY GLASS OPTIONS



Clear



Frosted



Seeded




Obscure



Rain



Clear
Polycarbonate



Matte
Polycarbonate

Windows are available single pane or insulated in clear, frosted, seeded, obscure and rain designs.
Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance. Additional charges of optional glass apply.

CANYON RIDGE® Louver

HANDCRAFTED 5-LAYER CONSTRUCTION



1. COMPOSITE OVERLAY
2. COMPOSITE CLADDING
3. STEEL
4. 2" INTELLICORE® POLYURETHANE INSULATION
5. STEEL



Canyon Ridge® Louver
Design 52 shown in Black Finish with SQ23 Windows
Photo Credit: @kirstie_kay

Versatile and unique, the plantation shutter style Canyon Ridge® Louver garage doors are a perfect complement to coastal beach homes or colonial estates. They can also be a standout piece on traditional exteriors or modern farmhouses. Whatever your style, these doors add "wow" factor to your home.

STYLE AND CONSTRUCTION

- 5-layer construction, 2" thick Intellicore® polyurethane insulation (R-value 18.4–20.4).
- Attractive beveled edge, clip-in grilles are removable for easy cleaning.
- Replaceable vinyl bottom weatherseal in a corrosion-resistant retainer helps seal out the elements.
- 10-ball nylon rollers for quiet operation.
- Heavy-duty 14 gauge steel hinges for long-lasting performance.

Calculated door section R-value is in accordance with DASMA TDS-163.

DOOR DESIGNS

Custom designs available, contact Clopay for availability.

SERIES 4



Design 41 | Design 42 | Design 43 | Design 44 | Design 45 | Design 46 | Design 47

SERIES 5



Design 51 | Design 52 | Design 53 | Design 54 | Design 55

Doors shown in Slate Finish.

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
Model CAN	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F S *+28/–29 PSF*	F S *+30/–32 PSF*	IR F T D W S *+38/–44 PSF*	SELECT W8	IR F D W *+54/–60 PSF*
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S *+25.5/–25.5 PSF*	F S *+30/–30 PSF*	TAPERED STRUT IR F T D W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT IR F D W *+46/–52 PSF*
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S *+25.5/–25.5 PSF*	F S *+30/–30 PSF*	TAPERED STRUT IR F T D W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT IR F D W *+46/–52 PSF*
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F *+25/–25 PSF*	SELECT W6	TAPERED STRUT IR F T D W S *+38/–42 PSF*		

S Standard Windows Available
IR Impact Rated
W Patented Impact Windows Available
F Florida Approved
D Dade County Approved
T Texas Department of Insurance Approved

For W6 –W8 doors over 10'2" wide, add 2" to the door width.

CANYON RIDGE® Louver



MATERIAL DESIGN OPTIONS

CLADDING/STEEL BASE MATERIAL



Louver Mahogany



Ultra-Grain® Finish Clear Cypress or Solid Color Steel

OVERLAY MATERIALS



Clear Cypress



Mahogany

FINISHING AND CARE: *Proper care and maintenance are imperative for long-term performance and appearance of Canyon Ridge® garage doors. Periodic inspection and maintenance of the composite cladding and overlays are required. Complete finishing and maintenance instructions are provided with the door and are also available from your Clopay Dealer or online at www.clopaydoor.com.*

COLOR OPTIONS



Natural Finish



Medium Finish



Dark Finish



Walnut Finish



Slate Finish



Bronze Finish*



Charcoal Finish*



Espresso Finish



Black Finish*



White Finish*




Primed (No Finish)

**Bronze, Charcoal, Black and White Finish available only on Mahogany cladding and overlays.*
Two-tone doors are available. To see all available options go to: ezdoor.clopay.com.
Steel surfaces have woodgrain texture.
Doors can be ordered primed for those homeowners wishing to custom paint or stain their doors. Note: Primed solid steel base is brown color. Door stain color will vary slightly within a door due to the finishing process. Due to the printing process, colors may vary.

WINDOW OPTIONS




REC11




REC13



REC14



SQ23



SQ24

Window grilles are Mahogany texture. Windows available only on Louver Design 52.

Standard windows available on the following widths only: 6'2", 8'0", 9'0", 10'0", 10'2", 12'0", 12'2", 13'6", 15'0", 15'2", 15'6", 15'8", 16'0", 16'2", 18'0", 18'2", 20'0", 20'2".
Impact rated windows available on the following widths only: 8'0", 9'0", 10'0", 12'2", 16'2", 18'2".
To view additional designs, windows and top sections available, please visit www.clopaydoor.com.

Impact rated windows available.




Design 52 with REC11 Windows

SPECIALTY GLASS OPTIONS



Clear



Frosted



Seeded




Obscure



Rain



Clear Polycarbonate



Matte Polycarbonate

Windows are available single pane or insulated in clear, frosted, seeded, obscure and rain designs.
Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance. Additional charges of optional glass apply.

COACHMAN®

HANDCRAFTED 4-LAYER CONSTRUCTION



1. COMPOSITE OVERLAY
2. STEEL
3. POLYURETHANE OR POLYSTYRENE INSULATION
4. STEEL



Coachman® Design 11; Shown in Standard White with REC13 Window Design
Photo Credit: Andy Frame Photography

Coachman® garage doors give your home classic elegance while complementing your home's architectural style.

STYLE AND CONSTRUCTION

- Custom composite overlay with beveled, coped edge and center groove creates a detailed carriage house look, available in four colors.
- Model CGU has 2" thick Intellicore® polyurethane insulation (R-value 18.4).
- Model CG has 2" thick bonded polystyrene insulation (R-value 9.0).
- Model CD has 1-3/8" thick bonded polystyrene insulation (R-value 6.5).
- Insulated with a thermal break between two layers of bonded steel.
- Coachman® garage doors can be painted using a high-quality exterior latex paint.

IMPORTANT: *For doors being painted black and very dark colors (having an LRV of 12 or less), please order Canyon Ridge® Carriage House 4-Layer in Black or primed. For colors having an LRV of 13 to 38 we require the use of tested and approved paints. A list of tested and approved paints can be found at: http://info.garagedoors.com/lrv.*

DOOR DESIGNS

Custom designs available, contact Clopay for availability.

SERIES 1


Design 11


Design 12


Design 13

SERIES 2


Design 21


Design 22


Design 23


SERIES 4


Design 41


Design 42

SERIES 3


Design 31


Design 32


Design 33


Design 34


Design 35


Design 36


Design 43

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
Model CD	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W5	SELECT W5	F T S *+33/–37 PSF*			
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S *+25/–25 PSF*				
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S *+25/–25 PSF*				
	18' Wide Door	S *+12.5/–14 PSF*						
Model CG	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W6	SELECT W6	SELECT W6	F T S *+38/–42 PSF*	SELECT W8	F T *+54/–60 PSF*
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W5	SELECT W5	F T S *+30/–30 PSF*	F T *+37/–40 PSF*	SELECT W8	F T *+46/–52 PSF*
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W5	SELECT W5	F T S *+30/–30 PSF*	F T *+37/–40 PSF*	SELECT W8	F T *+46/–52 PSF*
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W6	SELECT W6	SELECT W6	F T *+38/–42 PSF*		

For W1, Model CG is not available.
For W6 –W8 doors over 10'2" wide, add 2" to the door width.

COACHMAN®



COLOR OPTIONS


Standard White

Almond


Desert Tan


Sandtone

Overlay and base colors can be mixed to achieve desired look. Interior steel is always Standard White. Due to the printing process, colors may vary.

SPECIALTY GLASS OPTIONS


Clear



Frosted


Seeded


Obscure


Rain


Clear Polycarbonate


Matte Polycarbonate

Windows are available single pane or insulated in clear, frosted, seeded, obscure and rain designs. Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance. Additional charges of optional glass apply.

WINDOW OPTIONS


REC11


ARCH1 (Glass)


REC13


REC14


SQ23


SQ24


ARCH3


ARCH4


ARCH13


ARCH14

Series 3 and 4 are not available with windows. Double door designs also available.

Impact rated windows available.

WINDCODE® AVAILABILITY CHART

Model CGU	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	S *+28/–29 PSF*	SELECT W6	Impact F T D W S *+38/–44 PSF*	SELECT W8	Impact F D W *+54/–60 PSF*
	10' Wide Door	S *+12.5/–14 PSF*	SELECT W4	S *+25/–25 PSF*	S *+30/–30 PSF*	TAPERED STRUT Impact F T D W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT Impact F D *+46/–52 PSF*
	12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	S *+25/–25 PSF*	S *+30/–30 PSF*	TAPERED STRUT Impact F T D W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT Impact F D W *+46/–52 PSF*
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	S *+25/–25 PSF*	S *+30/–30 PSF*	TAPERED STRUT Impact F T D W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT Impact F D W *+46/–52 PSF*
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W4	*+25/–25 PSF*	SELECT W6	TAPERED STRUT Impact F T D W S *+38/–42 PSF*		

S Standard Windows Available
Impact Impact Rated
W Patented Impact Windows Available
F Florida Approved
D Dade County Approved
T Texas Department of Insurance Approved

For W6 –W8 doors over 10'2" wide, add 2" to the door width.

AVANTE®

DURABLE CONSTRUCTION



Model AXU Model AX



Avante® Model AX shown in Bronze (Anodized) Frame with Frosted Tempered Glass


Avante® is the perfect choice to modernize any home.

STYLE AND CONSTRUCTION


- 2-1/8" aluminum frame provides a virtually maintenance-free, long-lasting door.
- Intellicore® polyurethane insulated rails and stiles (Model AXU).
- R-value 3.8/U-factor 0.86 (Model AXU when glazed with clear insulated glass).
- Many glass and panel options available.
- C-Power™ enabled Click-to-Conceal™ Panels offered in clear/white opaque and gray clear/gray opaque glass options (insulated tempered or laminated).
- Section joint seal helps keep out air and water.
- Integral reinforcing fin provides increased strength and longevity (Available on double car models).
- Heavy-duty steel ball bearing rollers with nylon tires provide quiet operation.

Calculated door section R-value is in accordance with DASMA TDS-163.

DOOR DESIGNS



AX/AXU
(Single car door)

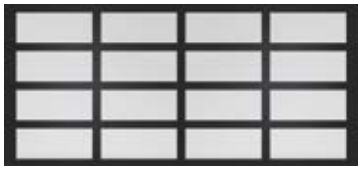

AX/AXU
(Double car door)

Additional sizes available for commercial door configurations. Contact Clopay for details.

HARDWARE



Attractive color-matched aluminum grip handles.

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W2	W3	W4	W5	W6	W8
Model AX/AXU	8', 9', 10' Wide Door	S *+14/–14 PSF*	S *+18/–20 PSF*	SELECT W4	F S *+25/–25 PSF*	F S *+30/–30 PSF*	F S *+40/–44 PSF*	F D S *+52/–58 PSF*
	12' Wide Door	S *+14/–14 PSF*	S *+18/–20 PSF*	SELECT W4	F S *+25/–25 PSF*	F S *+32/–32 PSF*	F S *+40/–44 PSF*	F D S *+52/–58 PSF*
	14' Wide Door	S *+14/–14 PSF*	S *+18/–20 PSF*	SELECT W4	F S *+25/–25 PSF*	F S *+32/–32 PSF*	F S *+40/–44 PSF*	F D S *+52/–58 PSF*
	16' Wide Door	S *+14/–14 PSF*	S *+18/–20 PSF*	SELECT W4	F S *+25/–25 PSF*	F S *+32/–32 PSF*	F S *+40/–42 PSF*	F D S *+46/–52 PSF*
	18' Wide Door	S *+14/–14 PSF*	S *+18/–20 PSF*	SELECT W4	F S *+25/–25 PSF*	F S* *+30/–30 PSF*	F W S *+36/–40 PSF*	AVAILABILITY PENDING
	20' Wide Door	S *+14/–14 PSF*	S *+18/–20 PSF*	SELECT W4	F S* *+25/–25 PSF*	F S* *+30/–30 PSF*	F S* *+36/–40 PSF*	

S Standard Windows Available **W** Impact Windows Available **D** Dade County Approved **W** Impact Rated **F** Florida Approved
T Texas Department of Insurance Approved *Doors require additional center stiles/more windows per section compared to standard doors

Glass may be obscured with reinforcement on 18' wide doors.
W8 only available with 5/16" clear laminate impact rated glass. See your Clopay Dealer for details.



FRAME/SOLID PANEL COLOR OPTIONS

Clear Aluminum (Anodized)

Standard White (Painted)

Bronze (Painted)

Chocolate (Painted)

Bronze (Anodized)

Black (Anodized)

Dark Bronze (Anodized)

Due to the anodizing process, color variation may occur. The use of "Bronze (Painted)" is recommended for a more consistent bronze finish color. Custom colors available.

GLASS/PANEL OPTIONS

Additional glass options available. Glass options affect price.



Clear Glass*



Gray Tinted Glass*



Midnight Gray Tinted Glass*



Bronze Tinted Glass*



Mirrored Glass*



Obscure Glass*



Clear Laminate Impact Rated Glass†

White Laminate Glass



Black Laminate Glass



Frosted Glass*
(Satin Etched)



Frosted Acrylic



Clear Acrylic

White Acrylic



Clear Polygal™



Bronze Polygal™



Clear Aluminum (Anodized)

**Glass is tempered.*
†5/16" clear, white, gray and bronze laminate impact rated glass is available only on AXUW8/AXW8.

Glass available in single pane or insulated. Laminated and mirrored glass not available insulated. Panels can be aluminum to match the aluminum frame. Glass/acrylic panels may be combined with aluminum panels. Custom glass and colors available. See your Clopay Dealer for details. Acrylic windows require special cleaning. See care and maintenance manual.

VERTISTACK® AVANTE®

DURABLE CONSTRUCTION




Model VSAXU *Model VSAX*



Connect to the outdoors with our VertiStack® Avante® modern aluminum and glass garage door. The unique, compact design stacks sections vertically on the wall above the opening, eliminating the need for exposed hinges, cable or overhead track for a crisp, clean look. Closed, the glass panel door lets in daylight and outdoor views. When opened, the interior footprint extends outside, creating an easy flow during gatherings.

STYLE AND CONSTRUCTION

- 2-1/8" aluminum frame provides a virtually maintenance-free, long-lasting door.
- Intellicore® polyurethane insulated rails and stiles (Model VSAXU).
- Section joint seal helps keep out air and water.
- Heavy-duty steel ball bearing rollers with nylon tires provide quiet operation.

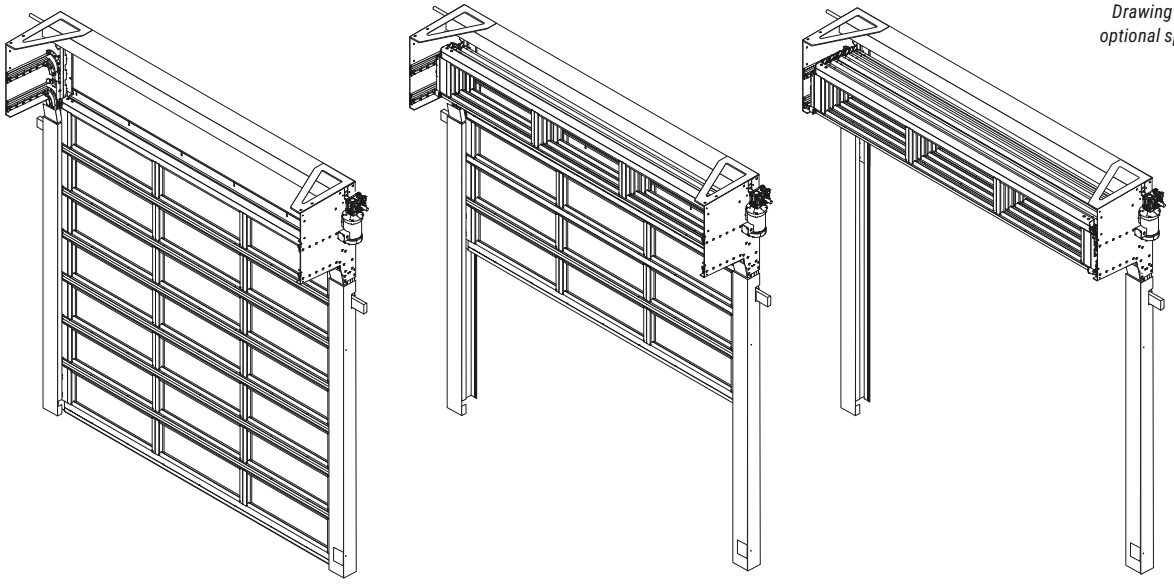


Drawing shown with optional spring cover.

The stacked sections require minimal projection off of the wall, so the door doesn't interfere with mechanical, electrical or plumbing fixtures, leaving room for fans, lighting, overhead storage or extended height ceilings. The sections can even be recessed into a ceiling soffit so when the door is open, no one will know it's there.

WINDCODE® AVAILABILITY CHART


	Common Door Widths	W1	W2	W3	W4	W5	W6	W8
VSAX	14' Wide Door	SELECT W4	SELECT W4	SELECT W4	S *+25/–25 PSF*			

S Standard Windows Available **W** Impact Windows Available **D** Dade County Approved **W** Impact Rated **F** Florida Approved
T Texas Department of Insurance Approved *Doors require additional center stiles/more windows per section compared to standard doors

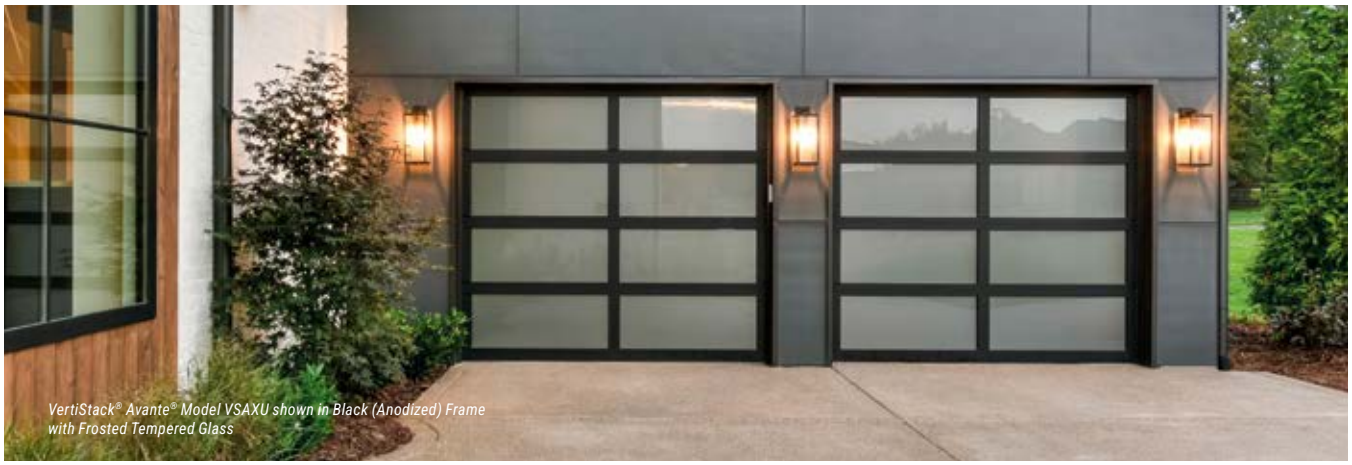


VertiStack® Avante® Model VSAXU shown in Black (Anodized) Frame with Frosted Tempered Glass

DOOR DESIGNS



VSAX/VSAXU
(Single car door)

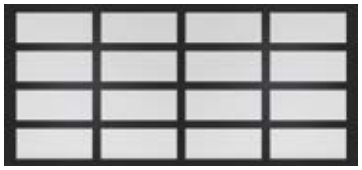

VSAX/VSAXU
(Double car door)

Additional sizes available for commercial door configurations. Contact Clopay for details.

FRAME/SOLID PANEL COLOR OPTIONS




Clear Aluminum (Anodized) | Standard White (Painted) | Bronze (Painted) | Chocolate (Painted) | Bronze (Anodized) | Black (Anodized) | Dark Bronze (Anodized)

Due to the anodizing process, color variation may occur. The use of "Bronze (Painted)" is recommended for a more consistent bronze finish color. Custom colors available.

GLASS/PANEL OPTIONS


Additional glass options available. Glass options affect price.



Clear Glass* | Gray Tinted Glass* | Midnight Gray Tinted Glass* | Bronze Tinted Glass* | Mirrored Glass* | Obscure Glass*



Clear Laminate Impact Rated Glass† | White Laminate Glass | Black Laminate Glass | Frosted Glass* *(Satin Etched)* | Frosted Acrylic | Clear Acrylic



White Acrylic | Clear Polygal™ | Bronze Polygal™ | Clear Aluminum (Anodized)

**Glass is tempered.*
†5/16" clear, white, gray and bronze laminate impact rated glass is available only on VSAXUW8/VSAXW8.


Glass available in single pane or insulated. Laminated and mirrored glass not available insulated. Panels can be aluminum to match the aluminum frame. Glass/acrylic panels may be combined with aluminum panels. Custom glass and colors available. See your Clopay Dealer for details. Acrylic windows require special cleaning. See care and maintenance manual.

AVANTE® SLEEK

DURABLE CONSTRUCTION



Model AZ6U *Model AZ6*

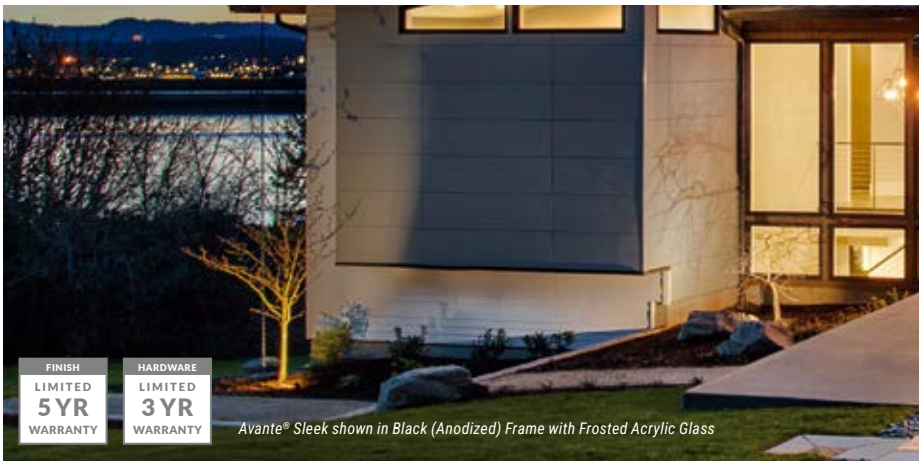

Avante® Sleek shown in Black (Anodized) Frame with Frosted Acrylic Glass


Avante® Sleek features slim horizontal glass windows and minimal vertical stiles for broad unobstructed views.

STYLE AND CONSTRUCTION


- 2-1/8" aluminum frame provides a virtually maintenance-free, long-lasting door.
- Intellicore® polyurethane insulated rails and stiles (Model AZ6U).
- Many glass options available.
- C-Power™ enabled Click-to-Conceal™ Panels offered in clear/white opaque and gray clear/gray opaque glass options (insulated tempered or laminated).
- Section joint seal helps keep out air and water.
- Integral reinforcing fin provides increased strength and longevity (Available on double car models).
- Heavy-duty steel ball bearing rollers with nylon tires provide quiet operation.

Calculated door section R-value is in accordance with DASMA TDS-163.

DOOR DESIGNS



AZ6/AZ6U
(Single car door)

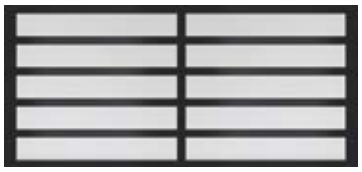

AZ6/AZ6U
(Double car door)

Additional sizes available for commercial door configurations. Contact Clopay for details.

HARDWARE



Attractive color-matched aluminum grip handles.

WINDCODE® AVAILABILITY CHART

Model AZ6/AZ6U — Common Door Widths	W1	W2	W3	W4	W5	W6	W8
8', 9', 10' Wide Door	S *+14/–14 PSF*	S *+18/–20 PSF*	SELECT W4	S *+25/–25 PSF*	S *+32/–32 PSF*		
12' Wide Door	S *+14/–14 PSF*	S *+18/–20 PSF*	SELECT W4	S *+25/–25 PSF*	S *+32/–32 PSF*		
14' Wide Door	S *+14/–14 PSF*	S *+18/–20 PSF*	SELECT W4	S *+25/–25 PSF*	S *+32/–32 PSF*		
16' Wide Door	S *+14/–14 PSF*	S *+18/–20 PSF*	SELECT W4	S *+25/–25 PSF*	S *+32/–32 PSF*		
18' Wide Door	S *+14/–14 PSF*	S *+18/–20 PSF*					
20' Wide Door	S *+14/–14 PSF*	S *+18/–20 PSF*					

S Standard Windows Available **W** Impact Windows Available **D** Dade County Approved **W** Impact Rated **F** Florida Approved
T Texas Department of Insurance Approved *Doors require additional center stiles/more windows per section compared to standard doors

Glass may be obscured with reinforcement on 18' wide doors.



FRAME COLOR OPTIONS

Clear Aluminum (Anodized) | Standard White (Painted) | Bronze (Painted) | Chocolate (Painted) | Bronze (Anodized) | Black (Anodized) | Dark Bronze (Anodized)

Due to the anodizing process, color variation may occur. The use of "Bronze (Painted)" is recommended for a more consistent bronze finish color. Custom colors available.

GLASS OPTIONS

NOTE: Glass options affect price.


Clear Glass*


Gray Tinted Glass*


Midnight Gray Tinted Glass*


Bronze Tinted Glass*


Mirrored Glass*


Clear Laminate Glass

White Laminate Glass


Gray Laminate Glass


Bronze Laminate Glass


Black Laminate Glass


Clear Acrylic

White Acrylic


Frosted Acrylic


Gray Acrylic


Bronze Acrylic


Black Acrylic

**Glass is tempered.*

Glass available in single pane or insulated. Laminated and mirrored glass not available insulated. Custom glass and colors available. See your Clopay Dealer for details. Acrylic windows require special cleaning. See care and maintenance manual.

GALLERY® STEEL

HANDCRAFTED 3, 2 OR 1-LAYER CONSTRUCTION





Constructed of durable steel, this vintage style line is available in long or short grooved panel designs with various windows, colors and hardware options to create that one-of-a-kind look.

STYLE AND CONSTRUCTION

- Hot-dipped galvanized steel skin with a baked-on primer and top coat helps ensure durability and long-lasting beauty.
- Intellicore® polyurethane or bonded polystyrene insulation with R-values ranging from 18.4 to 6.3.
- Windows are standard with double strength clear glass and have optional snap-in grilles. Other glass options are available; see opposite page for available options.
- Section joints and bottom weatherseal in a corrosion-resistant retainer help seal out the elements.

Calculated door section R-value is in accordance with DASMA TDS-163.

PANEL OPTIONS



Short Panel



Long Panel

COLOR OPTIONS



Due to the printing process, colors may vary.

*Not available on all models. Complete color availability can be found on pages 54–55.
†Additional charges apply.
Ultra-Grain® finish is a faux woodgrain paint coating offering the beauty of stained wood without the upkeep.
Ultra Grain® finish doors will have either a stucco or woodgrain steel surface texture.*

PANEL DETAIL

Deep-embossed panels with woodgrain or stucco surface texture improve appearance close-up and from the curb.



MODEL SPECIFICATIONS

MODEL	GD2SU	GD2LU	GD1SU	GD1LU	GD2SP	GD2LP	GD1SP	GD1LP
Panel Style	Short	Long	Short	Long	Short	Long	Short	Long
Insulation	2" Intellicore® Polyurethane	2" Intellicore® Polyurethane	1-3/8" Intellicore® Polyurethane	1-3/8" Intellicore® Polyurethane	2" Bonded Polystyrene	2" Bonded Polystyrene	1-3/8" Bonded Polystyrene	1-3/8" Bonded Polystyrene
Construction	3-Layer	3-Layer	3-Layer	3-Layer	3-Layer	3-Layer	3-Layer	3-Layer
R-value	18.4	18.4	12.9	12.9	9.0	9.0	6.5	6.5


GALLERY® STEEL



Gallery® Long Panel in Ultra-Grain® Oak Walnut Finish with ARCH3 Grilles

WINDOW OPTIONS

GLASS



Plain Short



REC12



SQ22

ACRYLIC



Wrought Iron Short



Plain Long



REC14



SQ24



Wrought Iron Long



ARCH1



Vertical Grille on ARCH1



Grille on ARCH1



Wrought Iron Arch



ARCH2



Vertical Grille on ARCH2



Grille on ARCH2

Acrylic windows require special cleaning. See care and maintenance manual.

Additional double width door designs available.
Double strength glass is standard.
Long windows are available on short panel doors and short windows are available on long panel doors.
Some limitations may apply based on W-Level. Contact your Clopay Dealer for details.

Impact rated windows available
(Mocha Brown is not available on impact rated windows)


SPECIALTY GLASS OPTIONS



Clear



Midnight Gray



Frosted



Seeded




Obscure



Rain



Clear Polycarbonate



Matte Polycarbonate

Windows are available single pane or insulated in clear, midnight gray, frosted, seeded, obscure and rain designs.
Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance. Additional charges of optional glass apply.

MODEL SPECIFICATIONS

MODEL	GD4S	GD4L	GD4SV	GD4LV	GD5S	GD5SV
Panel Style	Short	Long	Short	Long	Short	Short
Insulation	Non-Insulated	Non-Insulated	Polystyrene	Polystyrene	Non-Insulated	Polystyrene
Construction	1-Layer	1-Layer	2-Layer	2-Layer	1-Layer	2-Layer
R-value	N/A	N/A	6.3	6.3	N/A	6.3

GALLERY® STEEL

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
Model GD2SU	8', 9' Wide Door	S +13/–15 PSF	SELECT W4	F S +28/–29 PSF	SELECT W6	F T W S +38/–44 PSF	SELECT W8	F W +54/–60 PSF
	10', 12' Wide Door	S +12.5/–14 PSF	SELECT W4	F S +25.5/–25.5 PSF	F S +30/–30 PSF	TAPERED STRUT F T W S +38/–42 PSF	SELECT W8	TAPERED STRUT F W +46/–52 PSF
	16' Wide Door	S +12.5/–14 PSF	SELECT W4	F S +25.5/–25.5 PSF	F S +30/–30 PSF	TAPERED STRUT F T W S +38/–42 PSF	SELECT W8	TAPERED STRUT F W +46/–52 PSF
	18' Wide Door	S +12.5/–14 PSF	SELECT W4	F +25/–25 PSF	SELECT W6	TAPERED STRUT F T W S +38/–42 PSF		
Model GD2LU	8', 9' Wide Door	S +13/–15 PSF	SELECT W4	F S +28/–29 PSF	SELECT W6	F T W S +38/–44 PSF	SELECT W8	F W +54/–60 PSF
	10', 12' Wide Door	S +12.5/–14 PSF	SELECT W4	F S +25.5/–25.5 PSF	F S +30/–30 PSF	TAPERED STRUT F T W S +38/–42 PSF	SELECT W8	TAPERED STRUT F W +46/–52 PSF
	16' Wide Door	S +12.5/–14 PSF	SELECT W4	F S +25.5/–25.5 PSF	F S +30/–30 PSF	TAPERED STRUT F T W S +38/–42 PSF	SELECT W8	TAPERED STRUT F W +46/–52 PSF
	18' Wide Door	S +12.5/–14 PSF	SELECT W4	F +25/–25 PSF	SELECT W6	TAPERED STRUT F T W S +38/–42 PSF		
Model GD1SU	8', 9' Wide Door	S +13/–15 PSF	F S +20/–21 PSF	SELECT W5	S +30/–32 PSF			
	10', 12' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	SELECT W5	F +30/–30 PSF			
	16' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	SELECT W5	F +30/–30 PSF			
	18' Wide Door	S +12.5/–14 PSF						
Model GD1LU	8', 9' Wide Door	S +13/–15 PSF	F S +20/–21 PSF	SELECT W5	S +30/–32 PSF			
	10', 12' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	SELECT W5	F +30/–30 PSF			
	16' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	SELECT W5	F +30/–30 PSF			
	18' Wide Door	S +12.5/–14 PSF						
Model GD2SP	8', 9' Wide Door	S +13/–15 PSF	SELECT W4	F S +28/–29 PSF	SELECT W6	F T W S +38/–44 PSF	SELECT W8	F D W +54/–60 PSF
	10', 12' Wide Door	S +12.5/–14 PSF	SELECT W4	F S +25.5/–25.5 PSF	F S +30/–30 PSF	TAPERED STRUT F T D W S +38/–42 PSF	SELECT W8	TAPERED STRUT F D W +46/–52 PSF
	16' Wide Door	S +12.5/–14 PSF	SELECT W4	F S +25.5/–25.5 PSF	F S +30/–30 PSF	TAPERED STRUT F T D W S +38/–42 PSF	SELECT W8	TAPERED STRUT F D W +46/–52 PSF
	18' Wide Door	S +12.5/–14 PSF	SELECT W4	F +25/–25 PSF	SELECT W6	TAPERED STRUT F T D W S +38/–42 PSF		
	20'2" Wide Door	SELECT W5	SELECT W5	SELECT W5	F S +30/–33 PSF			
Model GD2LP	8', 9' Wide Door	S +13/–15 PSF	SELECT W4	F S +28/–29 PSF	SELECT W6	F T W S +38/–44 PSF	SELECT W8	F D W +54/–60 PSF
	10', 12' Wide Door	S +12.5/–14 PSF	SELECT W4	F S +25.5/–25.5 PSF	F S +30/–30 PSF	TAPERED STRUT F T D W S +38/–42 PSF	SELECT W8	TAPERED STRUT F D W +46/–52 PSF
	16' Wide Door	S +12.5/–14 PSF	SELECT W4	F S +25.5/–25.5 PSF	F S +30/–30 PSF	TAPERED STRUT F T D W S +38/–42 PSF	SELECT W8	TAPERED STRUT F D W +46/–52 PSF
	18' Wide Door	S +12.5/–14 PSF	SELECT W4	F +25/–25 PSF	SELECT W6	TAPERED STRUT F T D W S +38/–42 PSF		
	20'2" Wide Door	SELECT W5	SELECT W5	SELECT W5	F S +30/–33 PSF			
Model GD1SP	8', 9' Wide Door	S +13/–15 PSF	F S +20/–21 PSF	SELECT W5	F S +30/–32 PSF			
	10', 12' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	SELECT W5	F +30/–30 PSF			
	16' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	SELECT W5	F +30/–30 PSF			
	18' Wide Door	S +12.5/–14 PSF						
Model GD1LP	8', 9' Wide Door	S +13/–15 PSF	F S +20/–21 PSF	SELECT W5	F S +30/–32 PSF			
	10', 12' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	SELECT W5	F +30/–30 PSF			
	16' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	SELECT W5	F +30/–30 PSF			
	18' Wide Door	S +12.5/–14 PSF						

GALLERY® STEEL

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
GD4S 24 Gauge Pan Short	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F T S *+25/–25 PSF*	F T S *+30/–32 PSF*	F T W† S* *+38/–44 PSF*	SELECT W8	F D W *+50/–58 PSF*
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	F T S* *+30/–30 PSF*	TAPERED STRUT F W S* *+38/–42 PSF*	SELECT W8	F D W *+46/–52 PSF*
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	F T S* *+30/–30 PSF*	TAPERED STRUT F W S* *+38/–42 PSF*	SELECT W8	F D W *+46/–52 PSF*
	18' Wide Door	S* *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	SELECT W6	F S* *+37/–39 PSF*		
GD4SV 24 Gauge Insulated Short	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F T S *+25/–25 PSF*	F T S *+30/–32 PSF*			
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	F T S* *+30/–30 PSF*			
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	F T S* *+30/–30 PSF*			
	18' Wide Door	S* *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*				
GD4L 24 Gauge Pan Long	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F T S *+25/–25 PSF*	SELECT W6	F T W† S* *+38/–44 PSF*		
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	SELECT W6	TAPERED STRUT F S* *+38/–42 PSF*		
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	SELECT W6	TAPERED STRUT F S* *+38/–42 PSF*		
	18' Wide Door	S* *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*				
GD4LV 24 Gauge Insulated Long	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F T S *+25/–25 PSF*				
	10', 12' Wide Door	S *+12.5/–14 PSF*						
	16' Wide Door	S *+12.5/–14 PSF*						
	18' Wide Door							
GD5S 25 Gauge Pan Short	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F S *+25/–32 PSF*	F S *+30/–32 PSF*	F S* *+38/–42 PSF*	F *+42/–48 PSF*	
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S* *+24/–24.5 PSF*	*GD5S* F S* *+30/–30 or +32/–32 PSF* / TAPERED STRUT *GD5SSP* F* *+32/–37 PSF*	TAPERED STRUT F S* *+36/–42 PSF*		
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S* *+24/–24.5 PSF*	*GD5S* F S* *+30/–30 or +32/–32 PSF* / TAPERED STRUT *GD5SSP* F* *+32/–37 PSF*	TAPERED STRUT F S* *+36/–42 PSF*		
	18' Wide Door	S* *+12.5/–14 PSF*	SELECT W4	F S* *+25/–27 PSF*	SELECT W6	TAPERED STRUT F S* *+36/–42 PSF*		
GD5SV 25 Gauge Insulated Short	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F S *+25/–32 PSF*	F S *+30/–32 PSF*			
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S* *+24/–24.5 PSF*	*GD5SV* F S* *+30/–30 or +32/–32 PSF* / TAPERED STRUT *GD5SPV* F* *+32/–37 PSF*			
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S* *+24/–24.5 PSF*	*GD5SV* F S* *+30/–30 or +32/–32 PSF* / TAPERED STRUT *GD5SPV* F* *+32/–37 PSF*			
	18' Wide Door	S* *+12.5/–14 PSF*	SELECT W4	F S* *+25/–27 PSF*				

S Standard Windows Available
F Impact Rated
W Patented Impact Windows Available
F Florida Approved
D Dade County Approved
T Texas Department of Insurance Approved

For W6 –W8 doors over 9' wide, add 2" to the door width.
For W6, Model GD4S 18' wide doors are available only at 7' high.
Standard windows are not available in Texas.

**Long window availability is limited due to reinforcement requirements.*
†Impact windows are not available in Texas.

BRIDGEPORT™ STEEL

HANDCRAFTED 3, 2 OR 1-LAYER CONSTRUCTION





Bridgeport™ Steel garage doors combine the traditional symmetry of wood stile and rail door designs without the upkeep and maintenance. Create a look that complements the overall look of your home by selecting the window design, color and decorative hardware to give it that one-of-a-kind look.

STYLE AND CONSTRUCTION

- Hot-dipped galvanized steel skin with a baked-on primer and top coat helps ensure durability and long-lasting beauty.
- Intellicore® polyurethane or bonded polystyrene insulation with R-values ranging from 18.4 to 6.3.
- Windows are standard with double strength clear glass and have optional snap-in grilles. Other glass options are available; see opposite page for available options.
- Section joints and bottom weatherseal in a corrosion-resistant retainer help seal out the elements.

Calculated door section R-value is in accordance with DASMA TDS-163

PANEL OPTIONS



Narrow



Extended

COLOR OPTIONS



Due to the printing process, colors may vary.

*Not available on all models. Complete color availability can be found on pages 54–55.
† Additional charges apply.
Ultra-Grain® finish is a faux woodgrain paint coating offering the beauty of stained wood without the upkeep.
Ultra Grain® finish doors will have either a stucco or woodgrain steel surface texture.

PANEL DETAIL

A true recessed stamp replicates the timeless look of a rail and stile built wood door.

MODEL SPECIFICATIONS

MODEL	BD2NU	BD2EU	BD1NU	BD1EU
Panel Style	Narrow	Extended	Narrow	Extended
Insulation	2" Intellicore® Polyurethane	2" Intellicore® Polyurethane	1-3/8" Intellicore® Polyurethane	1-3/8" Intellicore® Polyurethane
Construction	3-Layer	3-Layer	3-Layer	3-Layer
R-value	18.4	18.4	12.9	12.9

BRIDGEPORT™ STEEL



Bridgeport® Steel Narrow Panel; Shown in Standard White with Plain Long Windows

WINDOW OPTIONS

GLASS



Plain Short



REC12



SQ22



Plain Long



REC14



SQ24



ARCH1



Vertical Grille on ARCH1



Grille on ARCH1



ARCH2



Vertical Grille on ARCH2



Grille on ARCH2

ACRYLIC



Wrought Iron Short



Wrought Iron Long



Wrought Iron Arch

Acrylic windows require special cleaning. See care and maintenance manual.

Additional double width door designs available.
Double strength glass is standard.
Long windows are available on narrow panel doors and short windows are available on extended panel doors.
Some limitations may apply based on W-Level. Contact your Clopay Dealer for details.

Impact rated windows available
(Mocha Brown is not available on impact rated windows)


SPECIALTY GLASS OPTIONS



Clear



Midnight Gray



Frosted



Seeded




Obscure



Rain



Clear Polycarbonate



Matte Polycarbonate

Windows are available single pane or insulated in clear, midnight gray, frosted, seeded, obscure and rain designs.
Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance. Additional charges of optional glass apply.

MODEL SPECIFICATIONS

MODEL	BD4NV	BD4EV	BD4N	BD4E
Panel Style	Narrow	Extended	Narrow	Extended
Insulation	Polystyrene	Polystyrene	Non-Insulated	Non-Insulated
Construction	2-Layer	2-Layer	1-Layer	1-Layer
R-value	6.3	6.3	N/A	N/A

BRIDGEPORT™ STEEL

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
Model BD2NU	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F S *+28/–29 PSF*	SELECT W6	F T W S *+38/–44 PSF*	SELECT W8	F W *+54/–60 PSF*
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S *+25.5/–25.5 PSF*	F S *+30/–30 PSF*	TAPERED STRUT F T W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT F W *+46/–52 PSF*
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S *+25.5/–25.5 PSF*	F S *+30/–30 PSF*	TAPERED STRUT F T W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT F W *+46/–52 PSF*
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F *+25/–25 PSF*	SELECT W6	TAPERED STRUT F T W S *+38/–42 PSF*		
Model BD2EU	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F S *+28/–29 PSF*	SELECT W6	F T W S *+38/–44 PSF*	SELECT W8	F W *+54/–60 PSF*
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S *+25.5/–25.5 PSF*	F S *+30/–30 PSF*	TAPERED STRUT F T W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT F W *+46/–52 PSF*
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S *+25.5/–25.5 PSF*	F S *+30/–30 PSF*	TAPERED STRUT F T W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT F W *+46/–52 PSF*
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F *+25/–25 PSF*	SELECT W6	TAPERED STRUT F T W S *+38/–42 PSF*		
Model BD1NU	8', 9' Wide Door	S *+13/–15 PSF*	F S *+20/–21 PSF*					
	10', 12' Wide Door	S *+12.5/–14 PSF*	F S *+20/–21 PSF*	SELECT W5	F *+30/–30 PSF*			
	16' Wide Door	S *+12.5/–14 PSF*	F S *+20/–21 PSF*	SELECT W5	F *+30/–30 PSF*			
	18' Wide Door	S *+12.5/–14 PSF*						
Model BD1EU	8', 9' Wide Door	S *+13/–15 PSF*	F S *+20/–21 PSF*					
	10', 12' Wide Door	S *+12.5/–14 PSF*	F S *+20/–21 PSF*	SELECT W5	F *+30/–30 PSF*			
	16' Wide Door	S *+12.5/–14 PSF*	F S *+20/–21 PSF*	SELECT W5	F *+30/–30 PSF*			
	18' Wide Door	S *+12.5/–14 PSF*						

BRIDGEPORT™ STEEL

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
BD4N 24 Gauge Pan Narrow	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F T S *+25/–25 PSF*	F T S *+30/–32 PSF*	F T W† S* *+38/–44 PSF*	SELECT W8	F D W *+50/–58 PSF*
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	F T S* *+30/–30 PSF*	TAPERED STRUT F W S* *+38/–42 PSF*	SELECT W8	F D W *+46/–52 PSF*
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	F T S* *+30/–30 PSF*	TAPERED STRUT F W S* *+38/–42 PSF*	SELECT W8	F D W *+46/–52 PSF*
	18' Wide Door	S* *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*				
BD4NV 24 Gauge Insulated Narrow	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F T S *+25/–25 PSF*	F T S *+30/–32 PSF*			
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	F T S* *+30/–30 PSF*			
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	F T S* *+30/–30 PSF*			
	18' Wide Door	S* *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*				
BD4E 24 Gauge Pan Extended	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F T S *+25/–25 PSF*	SELECT W6	F T W† S* *+38/–44 PSF*		
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	SELECT W6	TAPERED STRUT F S* *+38/–42 PSF*		
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	SELECT W6	TAPERED STRUT F S* *+38/–42 PSF*		
	18' Wide Door	S* *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*				
BD4EV 24 Gauge Insulated Extended	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F T S *+25/–25 PSF*				
	10', 12' Wide Door	S *+12.5/–14 PSF*						
	16' Wide Door	S *+12.5/–14 PSF*						
	18' Wide Door							

S Standard Windows Available
F Florida Approved
T Texas Department of Insurance Approved
W Patented Impact Windows Available
D Dade County Approved
Impact Rated

For W6 – W8 doors over 9' wide, add 2" to the door width.
For W6, Model BD4N 18' wide doors are available only at 7' high.
Standard windows are not available in Texas.

** Long window availability is limited due to reinforcement requirements.*
† Impact windows are not available in Texas.

BRIDGEPORT™ INLAY

HANDCRAFTED 3, 2 OR 1-LAYER CONSTRUCTION





Bridgeport™ Inlay brings together timeless Shaker-inspired design and modern simplicity to create a look that feels both fresh and familiar. Clean, recessed panel steel doors provide lasting durability and low maintenance, while new inlay options add the warmth and character of a classic carriage house style.

STYLE AND CONSTRUCTION

- Hot-dipped galvanized steel skin with a baked-on primer and top coat helps ensure durability and long-lasting beauty.
- Intellicore® polyurethane or bonded polystyrene insulation with R-values ranging from 18.4 to 6.3.
- Windows are standard with double strength clear glass and have optional snap-in grilles. Other glass options are available; see opposite page for available options.
- Section joints and bottom weatherseal in a corrosion-resistant retainer help seal out the elements.

Calculated door section R-value is in accordance with DASMA TDS-163

COLOR OPTIONS

Standard White | Almond | Desert Tan | Sandtone | Bronze*


Chocolate | Mocha Brown* | Charcoal* | Iron Ore*† | Black*†


Ultra-Grain® Oak Medium Finish*† | Ultra-Grain® Oak Dark Finish*† | Ultra-Grain® Oak Walnut Finish*† | Ultra-Grain® Oak Slate Finish*†

Due to the printing process, colors may vary.

**Not available on all models. Complete color availability can be found on pages 54–55.*
† Additional charges apply.
Ultra-Grain® finish is a faux woodgrain paint coating offering the beauty of stained wood without the upkeep.
Ultra Grain® finish doors will have either a stucco or woodgrain steel surface texture.

INLAY OPTIONS


Design A


Design V


Design X

PANEL DETAIL

Inlays have a subtle, pebbled texture to complement the door's embossed stucco or woodgrain surface.



MODEL SPECIFICATIONS

MODEL	BD2CU	BD1CU
Panel Style	Extended	Extended
Insulation	2" Intellicore® Polyurethane	1-3/8" Intellicore® Polyurethane
Construction	3-Layer	3-Layer
R-value	18.4	12.9

BRIDGEPORT™ INLAY



Bridgeport™ Inlay, Design X;
Shown in Iron Ore with Plain Long Windows

WINDOW OPTIONS

GLASS



Plain Short



REC12



SQ22

ACRYLIC



Wrought Iron Short



Plain Long



REC14



SQ24



Wrought Iron Long



ARCH1



Vertical Grille on ARCH1



Grille on ARCH1



Wrought Iron Arch



ARCH2



Vertical Grille on ARCH2



Grille on ARCH2

Acrylic windows require special cleaning.
See care and maintenance manual.

Additional double width door designs available.
Double strength glass is standard.
Some limitations may apply based on W-Level. Contact your Clopay Dealer for details.

Impact rated windows available
(Mocha Brown is not available on impact rated windows)


SPECIALTY GLASS OPTIONS



Clear



Midnight Gray



Frosted



Seeded




Obscure



Rain



Clear Polycarbonate



Matte Polycarbonate

Windows are available single pane or insulated in clear, midnight gray, frosted, seeded, obscure and rain designs.
Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance. Additional charges of optional glass apply.

MODEL SPECIFICATIONS

MODEL	BD4CV	BD4C
Panel Style	Extended	Extended
Insulation	Polystyrene	Non-Insulated
Construction	2-Layer	1-Layer
R-value	6.3	N/A

BRIDGEPORT™ INLAY

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
Model BD2CU	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F S *+28/–29 PSF*	SELECT W6	F T W S *+38/–44 PSF*	SELECT W8	F W *+54/–60 PSF*
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S *+25.5/–25.5 PSF*	F S *+30/–30 PSF*	TAPERED STRUT F T W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT F W *+46/–52 PSF*
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S *+25.5/–25.5 PSF*	F S *+30/–30 PSF*	TAPERED STRUT F T W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT F W *+46/–52 PSF*
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F *+25/–25 PSF*	SELECT W6	TAPERED STRUT F T W S *+38/–42 PSF*		
Model BD1CU	8', 9' Wide Door	S *+13/–15 PSF*	F S *+20/–21 PSF*					
	10', 12' Wide Door	S *+12.5/–14 PSF*	F S *+20/–21 PSF*	SELECT W5	F *+30/–30 PSF*			
	16' Wide Door	S *+12.5/–14 PSF*	F S *+20/–21 PSF*	SELECT W5	F *+30/–30 PSF*			
	18' Wide Door	S *+12.5/–14 PSF*						

BRIDGEPORT™ INLAY

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
BD4C 24 Gauge Pan	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F T S *+25/–25 PSF*	SELECT W6	F T W† S* *+38/–44 PSF*		
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	SELECT W6	TAPERED STRUT F S* *+38/–42 PSF*		
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*	SELECT W6	TAPERED STRUT F S* *+38/–42 PSF*		
	18' Wide Door	S* *+12.5/–14 PSF*	SELECT W4	F T S* *+25/–25 PSF*				
BD4CV 24 Gauge Insulated	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	F T S *+25/–25 PSF*				
	10', 12' Wide Door	S *+12.5/–14 PSF*						
	16' Wide Door	S *+12.5/–14 PSF*						
	18' Wide Door							

S Standard Windows Available
F Impact Rated
W Patented Impact Windows Available
F Florida Approved
D Dade County Approved
T Texas Department of Insurance Approved

For W6 – W8 doors over 9' wide, add 2" to the door width.
Standard windows are not available in Texas.

** Long window availability is limited due to reinforcement requirements.*
† Impact windows are not available in Texas.

MODERN STEEL™

3 OR 1-LAYER CONSTRUCTION





Modern Steel™ garage doors complement contemporary and mid-century modern home styles. Doors are available with or without windows and with or without grooves in the panels. All are available in multiple paint, Ultra-Grain® and Lustra™ finishes to create the perfect look for your home.

STYLE AND CONSTRUCTION

- Intellicore® polyurethane or bonded polystyrene insulation with R-values ranging from 18.4 to 6.5.
- Modern Flush and Grooved panels with a textured steel surface improve appearance close-up and from the curb.
- Replaceable vinyl bottom weatherseal in a corrosion-resistant retainer helps seal out the elements.

Calculated door section R-value is in accordance with DASMA TDS-163.

PANEL OPTIONS

Modern Flush (9208, 9202, 9201, 9138, 9132, 9131, 4308, 4302, 4301, 4138, 4132, 4051, 4F, 4F4)


Modern Grooved (9209, 9205, 9139, 4309, 4305)

CONTEMPORARY WINDOW ORIENTATION


When ordering contemporary window configurations please reference the examples provided to describe your desired window positions. **Note: Window configurations are described from inside the garage looking out.**

For popular contemporary window configurations and window options see pages 38–39.

Example: Windows down right side (from inside garage looking out)

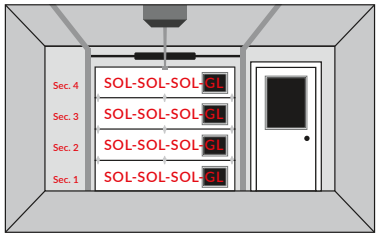

View from Inside Garage

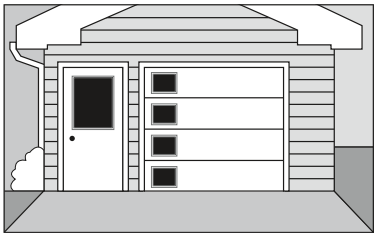

View from Outside Garage

MODEL SPECIFICATIONS

MODELS	9202, 9201	9208	9205	9209	9132, 9131	9138	9139
Panel Style	Modern Flush	Modern Flush with Contemporary Windows	Modern Grooved	Modern Grooved with Contemporary Windows	Modern Flush	Modern Flush with Contemporary Windows	Modern Grooved with Contemporary Windows
Steel Texture*	Woodgrain	Stucco/Smooth†	Stucco	Stucco/Smooth†	Woodgrain	Stucco	Stucco
Insulation	2" Intellicore® Polyurethane	2" Intellicore® Polyurethane	2" Intellicore® Polyurethane	2" Intellicore® Polyurethane	1-3/8" Intellicore® Polyurethane	1-3/8" Intellicore® Polyurethane	1-3/8" Intellicore® Polyurethane
Construction	3-Layer	3-Layer	3-Layer	3-Layer	3-Layer	3-Layer	3-Layer
R-value	18.4	18.4	18.4	18.4	12.9	12.9	12.9

MODERN STEEL™



Modern Steel™ Modern Grooved Panel shown in Mocha Brown with Plain Short Windows down left side (from inside garage looking out)

COLOR OPTIONS

Standard White | Almond | Desert Tan | Sandtone | Bronze* | Chocolate | Mocha Brown*

Charcoal* | Iron Ore*† | Black*† | Hunter Green*

*Not available on all models.
Due to the printing process, colors may vary.

Lustra™ Black*† | Lustra™ Charcoal*† | Lustra™ Silver*† | Ultra-Grain® Cypress Medium Finish*† | Ultra-Grain® Cypress Cherry Finish*† | Ultra-Grain® Cypress Walnut Finish*† | Ultra-Grain® Cypress Slate Finish*†

Complete color availability can be found on pages 54–55.
†Additional charges apply.

ULTRA-GRAIN® PLANK



Coastal Gray Finish



Natural Finish



Cedar Finish



Kona Finish



Barnwood Finish



Espresso Finish

Not available on all models. Complete color availability can be found on pages 54–55.
Due to the printing process, colors may vary. Additional charges apply.

MODEL SPECIFICATIONS

MODELS	4302, 4301	4308	4305	4309	4132, 4051	4138	4F, 4F4‡
Panel Style	Modern Flush	Modern Flush with Contemporary Windows	Modern Grooved	Modern Grooved with Contemporary Windows	Modern Flush	Modern Flush with Contemporary Windows	Modern Flush
Steel Texture*	Woodgrain	Stucco	Stucco	Stucco	Woodgrain	Stucco	Woodgrain
Insulation	2" Bonded Polystyrene	2" Bonded Polystyrene	2" Bonded Polystyrene	2" Bonded Polystyrene	1-3/8" Bonded Polystyrene	1-3/8" Bonded Polystyrene	Non-Insulated
Construction	3-Layer	3-Layer	3-Layer	3-Layer	3-Layer	3-Layer	1-Layer
R-value	9.0	9.0	9.0	9.0	6.5	6.5	N/A

**Exterior steel surface on an Ultra-Grain® Cypress finish door has a woodgrain texture on Modern Steel™ garage doors.*
†Exterior steel surface on a Lustra™ finish door has a smooth texture on Modern Steel™ garage doors.
‡Model 4F utilizes 21" and 18" sections while the Model 4F4 utilizes 24" and 21" sections.

MODERN STEEL™

POPULAR CONTEMPORARY WINDOW CONFIGURATIONS

The windows shown below apply to Models 9208, 9209, 9138, 9139, 4308, 4309 and 4138. These doors utilize 24" and 21" section heights, allowing for the window options shown. 18" sections not available with windows.

Contemporary window configurations come standard with tempered glass and are available in many design options, including windows in each section and down one side, short and long windows or windows in all sections. For doors with multiple window sections, the window locations must be the same in every section.

The images below are illustrated from outside the garage.


Important Note: The ordering codes listed below are from the inside of the garage looking out, as explained on the previous page. See your Clopay dealer for more details.


The illustrations shown below show window (glazed) and/or no window (solid) locations.


SOL=Solid (no window) location GL=Glazed (window) location


Sections are numbered from the floor up to the top of the door.

SHORT WINDOW CONFIGURATIONS
(Viewed from outside)



SOL-SOL-SOL-GL
Sections: 1, 2, 3, 4



SOL-SOL-SOL-SOL-SOL-SOL-GL-GL
Sections: 1, 2, 3, 4



GL-SOL-SOL-SOL
Sections: 1, 2, 3, 4


GL-GL-SOL-SOL-SOL-SOL-SOL-SOL
Sections: 1, 2, 3, 4



GL-SOL-SOL-GL
Sections: 3, 4



GL-GL-SOL-SOL-SOL-SOL-GL-GL
Sections: 3, 4



GL-GL-GL-GL
Sections: 1, 2, 3, 4



GL-GL-GL-GL-GL-GL-GL-GL
Sections: 1, 2, 3, 4

LONG WINDOW CONFIGURATIONS
(Viewed from outside)


SOL-GL
Sections: 1, 2, 3, 4



SOL-SOL-SOL-GL
Sections: 1, 2, 3, 4



GL-SOL
Sections: 1, 2, 3, 4


GL-SOL-SOL-SOL
Sections: 1, 2, 3, 4


GL-GL
Sections: 3, 4



GL-GL-GL-GL
Sections: 3, 4


GL-GL
Sections: 1, 2, 3, 4


GL-GL-GL-GL
Sections: 1, 2, 3, 4

SLIM WINDOW CONFIGURATIONS
(Viewed from outside)


SOL-GL
Sections: 1, 2, 3, 4


SOL-SOL-SOL-GL
Sections: 1, 2, 3, 4


GL-SOL
Sections: 1, 2, 3, 4


GL-SOL-SOL-SOL
Sections: 1, 2, 3, 4


GL-GL
Sections: 3, 4


GL-GL-GL-GL
Sections: 3, 4


GL-GL
Sections: 1, 2, 3, 4


GL-GL-GL-GL
Sections: 1, 2, 3, 4

MODERN STEEL™ WINDOW OPTIONS

CONTEMPORARY SLIM WINDOW OPTIONS

Available on These Models: 9208, 9209, 4308, 4309


378SV – Silver



378BK – Black

Contemporary Slim windows are available impact rated.
To order Contemporary Slim windows in WindCode® products, contact customer service.

CONTEMPORARY SLIM SPECIALTY GLASS OPTIONS


Clear


Midnight Gray


Frosted

Contemporary Slim windows are available single pane or insulated in clear, midnight gray and frosted designs.
Clear acrylic also available.

MODERN STEEL™ WINDOW OPTIONS

DECORATIVE INSERT SERIES WINDOW OPTIONS

Available on These Models: 9201, 9131, 4301, 4051, 4F, 4F4


Plain Short


Plain Long


Charleston 508


Colonial 509


Prairie 510


Sunset 501* *(4, 6, 8 or 10 panels across)*


Sunset 502* *(3, 6 or 9 panels across)*


Sunset 503* *(4 or 8 panels across)*


Sunset 506* *(5 or 10 panels across)*


Sunset 504* *(7 panels across only)*


Sunset 505* *(8 panels across only)*


Charleston 608


Stockton 612


Prairie 610


Madison 611


Madison Arch 613


Sunset 601* *(2, 3, 4 or 5 long panels across)*


Sunset 603* *(2 or 4 long panels across)*


Sunset 605* *(4 long panels across)*

**Sunset windows not available on Ultra-Grain® finish doors.*

CONTEMPORARY/ARCHITECTURAL SERIES WINDOW OPTIONS


Available on These Models: 9202, 9201, 9208*†, 9205, 9209*†, 9132, 9131, 9138*, 9139*, 4302, 4301, 4308*, 4305, 4309*, 4132, 4138*


Plain Short


Plain Long


Plain Short**


Plain Long**


REC12


REC14


SQ22


SQ24


ARCH1


ARCH2


Vertical Grille on ARCH1


Vertical Grille on ARCH2


Grille on ARCH1


Grille on ARCH2


Wrought Iron Short (Acrylic)


Wrought Iron Long (Acrylic)


Wrought Iron Arch (Acrylic)

* *Models available only with plain, rectangular grille and square grille windows.*

** *7' high doors with impact rated windows utilize smaller glazing height to obscure reinforcement.*

† *Ultra-Grain® Plank and Lustra™ finishes available only with plain windows.*


Additional double width door designs available.

Double strength glass is standard.

Contemporary/Architectural Series windows are not available on Modern Steel™ Models 4051, 4F and 4F4.

DECORATIVE INSERT SERIES SPECIALTY GLASS OPTIONS


Clear


Frosted


Obscure


Rain

Clear Polycarbonate

Matte Polycarbonate

Plain and Snap-In Series windows are available single pane or insulated in clear, frosted, obscure and rain designs.

Clear acrylic also available.

Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance.

Acrylic windows require special cleaning. See care and maintenance manual.

Window heights may vary based on section height.

Impact rated windows available
(Mocha Brown is not available on impact rated windows)

CONTEMPORARY/ARCHITECTURAL SERIES SPECIALTY GLASS OPTIONS

Clear

Midnight Gray

Frosted

Obscure

Narrow Reed

Clear Polycarbonate

Matte Polycarbonate

Contemporary/Architectural Series windows are available single pane or insulated in clear, midnight gray, frosted, obscure and narrow reed designs.

Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance.

Additional charges for optional glass apply.

MODERN STEEL™

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W2	W3	W4	W5	W6	W7	W8	W9
Models 9202, 9205	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W6	SELECT W6	SELECT W6	SELECT W6	F T W S* *+38/–44 PSF*	SELECT W8	F W* *+54/–60 PSF*	
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W6	SELECT W6	SELECT W6	SELECT W6	TAPERED STRUT F T W S* *+38/–42 PSF*	SELECT W8	TAPERED STRUT F W* *+46/–52 PSF*	
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W6	SELECT W6	SELECT W6	SELECT W6	TAPERED STRUT F T W S* *+38/–42 PSF*	SELECT W8	TAPERED STRUT F W* *+46/–52 PSF*	
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W6	SELECT W6	SELECT W6	SELECT W6	TAPERED STRUT F T W S* *+38/–42 PSF*			
Models 9208, 9209	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	SELECT W4	F S *+25/–25 PSF*	SELECT W6	F T W S *+38/–42 PSF*	SELECT W8	F T D W S *+54/–62 PSF*	
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	SELECT W4	F S *+26/–28 PSF*	SELECT W6	F T W S *+38/–42 PSF*	SELECT W8	U-BAR F T D W S *+50/–56 PSF*	
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	SELECT W4	F S *+25/–25 PSF*	SELECT W6	F T W S *+38/–42 PSF*	SELECT W8	F T D W S *+46/–52 PSF*	
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W4	SELECT W4	F S *+25/–25 PSF*	SELECT W6	F T W S *+38/–42 PSF*			
Model 9201	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W4	SELECT W4	F T S *+28/–29 PSF*	F S *+30/–32 PSF*	F T W S *+38/–44 PSF*	SELECT W8	F T W *+48/–60 PSF*	
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W4	SELECT W4	F T S *+25.5/–25.5 PSF*	SELECT W6	U-BAR F W S *+37/–40 PSF*; TAPERED STRUT F T W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT F T W *+46/–52 PSF*	
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	SELECT W4	F T S *+25.5/–25.5 PSF*	SELECT W6	U-BAR F W S *+37/–40 PSF*; TAPERED STRUT F T W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT F T W *+46/–52 PSF*	
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W4	SELECT W4	F T S *+24/–24.5 PSF*	SELECT W6	TAPERED STRUT F T W S *+38/–42 PSF*	SELECT W8	TAPERED STRUT F T W *+46/–50 PSF*	
Model 9131	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W3	F S *+20/–20 PSF*	F S *+25/–28 PSF*	F W S *+33/–37 PSF*	F S *+37/–37 PSF*			
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W3	F S *+20/–21 PSF*	F S *+24/–26 PSF*	F S *+32/–32 PSF*				
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W3	F S *+20/–21 PSF*	F S *+24/–26 PSF*	F S *+32/–32 PSF*				
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W4	SELECT W4	F S *+24/–26 PSF*					
Models 9132, 9138, 9139	8', 9' Wide Door	S *+13/–15 PSF*								
	10', 12' Wide Door	S *+12.5/–14 PSF*								
	16' Wide Door	S *+12.5/–14 PSF*								
	18' Wide Door	S *+12.5/–14 PSF*								
Models 4302, 4305	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W6	SELECT W6	SELECT W6	SELECT W6	F T W S† *+38/–44 PSF*	SELECT W8	F D W† *+54/–60 PSF*	
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W6	SELECT W6	SELECT W6	SELECT W6	TAPERED STRUT F T D W S† *+38/–42 PSF*	SELECT W8	TAPERED STRUT F D W† *+46/–52 PSF*	
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W6	SELECT W6	SELECT W6	SELECT W6	TAPERED STRUT F T D W S† *+38/–42 PSF*	SELECT W8	TAPERED STRUT F D W† *+46/–52 PSF*	
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W6	SELECT W6	SELECT W6	SELECT W6	TAPERED STRUT F T W S† *+38/–42 PSF*			
	20'2" Wide Door	SELECT W5	SELECT W5	SELECT W5	SELECT W5	F S *+30/–33 PSF*				

MODERN STEEL™

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W2	W3	W4	W5	W6	W7	W8	W9
Models 4308, 4309	8', 9' Wide Door	S +13/–15 PSF								
	10', 12' Wide Door	S +12.5/–14 PSF								
	16' Wide Door	S +12.5/–14 PSF								
	18' Wide Door	S +12.5/–14 PSF								
Model 4301	8', 9' Wide Door	S +13/–15 PSF	SELECT W4	SELECT W4	FTWS +28/–29 PSF	SELECT W6	FTWS +38/–44 PSF	SELECT W8	FDTW +48/–60 PSF	
	10', 12' Wide Door	S +12.5/–14 PSF	SELECT W4	SELECT W4	FTWS +25.5/–25.5 PSF	SELECT W6	TAPERED STRUT FTDWS +38/–42 PSF	SELECT W8	TAPERED STRUT FTDW +46/–52 PSF	
	16' Wide Door	S +12.5/–14 PSF	SELECT W4	SELECT W4	FTWS +25.5/–25.5 PSF	SELECT W6	TAPERED STRUT FTDWS +38/–42 PSF	SELECT W8	TAPERED STRUT FTDW +46/–52 PSF	
	18' Wide Door	S +12.5/–14 PSF	SELECT W4	SELECT W4	FTWS +25/–25 PSF	SELECT W6	TAPERED STRUT FTDWS +38/–42 PSF	SELECT W8	TAPERED STRUT FTDW +46/–50 PSF	
	20'2" Wide Door	SELECT W5	SELECT W5	SELECT W5	SELECT W5	FS +30/–33 PSF	TAPERED STRUT FTW +37/–40 PSF			
Model 4132	8', 9' Wide Door	S +13/–15 PSF								
	10', 12' Wide Door	S +12.5/–14 PSF								
	16' Wide Door	S +12.5/–14 PSF								
	18' Wide Door	S +12.5/–14 PSF								
Model 4138	8', 9' Wide Door	S +13/–15 PSF								
	10', 12' Wide Door	S +12.5/–14 PSF								
	16' Wide Door	S +12.5/–14 PSF								
	18' Wide Door	S +12.5/–14 PSF								
Model 4051	8', 9' Wide Door	S +13/–15 PSF	SELECT W3	FS +20/–21 PSF	SELECT W6	SELECT W6	FS +37/–37 PSF | FS +38/–42 PSF			
	10', 12' Wide Door	S +12.5/–14 PSF	SELECT W3	FS +20/–21 PSF	SELECT W5	FS +30/–30 PSF or +32/–32 PSF				
	16' Wide Door	S +12.5/–14 PSF	SELECT W3	FS +20/–21 PSF	SELECT W5	FS +30/–30 PSF or +32/–32 PSF				
	18' Wide Door	S +12.5/–14 PSF								
Model 4F	8', 9' Wide Door	SELECT W8	SELECT W8	SELECT W8	SELECT W8	SELECT W8	SELECT W8	SELECT W8	FW† +48/–54 or +54/–62 PSF	FDW +62/–72 PSF
	10', 12' Wide Door	SELECT W6	SELECT W6	SELECT W6	SELECT W6	SELECT W6	TAPERED STRUT FTDWS* +38/–42 PSF	FDW +42/–48 PSF	TAPERED STRUT FDW +46/–50 PSF	
	16' Wide Door	SELECT W6	SELECT W6	SELECT W6	SELECT W6	SELECT W6	TAPERED STRUT FTDWS* +38/–42 or +36/–42 PSF	SELECT W8	TAPERED STRUT FDW +46/–50 PSF	
	18' Wide Door	SELECT W6	SELECT W6	SELECT W6	SELECT W6	SELECT W6	TAPERED STRUT FTDWS* +36/–42 PSF	TAPERED STRUT FDW +41/–46 PSF		
Model 4F4	8', 9' Wide Door	S +13/–15 PSF	SELECT W4	SELECT W4	FS +25/–25 PSF					
	10', 12' Wide Door	S +12.5/–14 PSF	SELECT W4	SELECT W4	FS +25/–25 PSF					
	16' Wide Door	S +12.5/–14 PSF	SELECT W4	SELECT W4	FS +25/–25 PSF					

S Standard Windows Available
Impact Rated
W Patented Impact Windows Available
F Florida Approved
D Dade County Approved
T Texas Department of Insurance Approved

For W6 –W8 doors over 9' wide, add 2" to the door width.
Standard windows are not available in Texas.

**Model 9205 is not Texas approved.*
†Model 4305 is not Florida, Dade or Texas approved.

CLASSIC™ STEEL

PREMIUM

3-LAYER CONSTRUCTION



1. STEEL
2. INTELLICORE® POLYURETHANE OR POLYSTYRENE INSULATION
3. STEEL



Premium Elegant Short Panel with Colonial 509 Window Design shown in Standard White

3-layer, steel construction features Intellicore® polyurethane or bonded polystyrene insulation sandwiched between two layers of heavy-duty steel for excellent energy efficiency, strength, durability and quietest operation.

STYLE AND CONSTRUCTION

- 3-layer construction (steel + insulation + steel).
- Tongue-and-groove section joint and bottom weatherseal in a corrosion-resistant retainer help seal out the elements.
- Woodgrain embossed, insulated steel base door painted front and back for a clean appearance.
- Prepainted Standard White end stiles and interior steel backing for a clean appearance.
- R-values range from 18.4 to 6.5.

Calculated door section R-value is in accordance with DASMA TDS-163.

PANEL OPTIONS



Elegant Short (9200, 9130, 4300, 4050)

Elegant Long (9203, 9133, 4310, 4053)

COLOR OPTIONS



Standard White | Almond | Desert Tan | Sandtone | Bronze | Chocolate

Mocha Brown* | Charcoal* | Iron Ore*† | Black† | Hunter Green**

Ultra-Grain® Classic Medium Finish*† | Ultra-Grain® Classic Cherry Finish*† | Ultra-Grain® Classic Walnut Finish*†

Due to the printing process, colors may vary.
**Not available on all Models. Complete color availability can be found on pages 54–55.*
***Not available on Models 4050, 4053 and W8 doors.*
†Additional charges apply.

PANEL DETAIL

Decorative panel edging and natural embossed woodgrain or stucco (Ultra-Grain® finish only) texture improve appearance close-up and from the curb.



MODEL SPECIFICATIONS

MODEL	9200, 9203	9130, 9133	4300, 4310	4050, 4053
Panel Style	Elegant Short and Long	Elegant Short and Long	Elegant Short and Long	Elegant Short and Long
Insulation	2" Intellicore® Polyurethane	1-3/8" Intellicore® Polyurethane	2" Bonded Polystyrene	1-3/8" Bonded Polystyrene
Construction	3-Layer	3-Layer	3-Layer	3-Layer
R-value	18.4	12.9	9.0	6.5

CLASSIC™ STEEL PREMIUM WINDOW OPTIONS

DECORATIVE INSERT SERIES WINDOW OPTIONS

Available on These Models: 9200*, 9203, 9130*, 9133, 4300*, 4310, 4050*, 4053


Plain Short


Plain Long


Charleston 508


Colonial 509


Prairie 510


Sunset 501* *(4, 6, 8 or 10 panels across)*


Sunset 502* *(3, 6 or 9 panels across)*


Sunset 503* *(4 or 8 panels across)*


Sunset 506* *(5 or 10 panels across)*


Sunset 504* *(7 panels across only)*


Sunset 505* *(8 panels across only)*


Charleston 608


Stockton 612


Prairie 610


Madison 611


Madison Arch 613


Sunset 601* *(2, 3, 4 or 5 long panels across)*


Sunset 603* *(2 or 4 long panels across)*


Sunset 605* *(4 long panels across)*

**Sunset windows not available on Ultra-Grain® finish doors.*

ARCHITECTURAL SERIES WINDOW OPTIONS

Available on These Models: 9200*, 9203, 9130*, 9133, 4300*, 4310


Plain Short


Plain Long


REC12


REC14


SQ22


SQ24


ARCH1


ARCH2


Vertical Grille on ARCH1


Vertical Grille on ARCH2


Grille on ARCH1


Grille on ARCH2


Wrought Iron Short (Acrylic)



Wrought Iron Long (Acrylic)


Wrought Iron Arch (Acrylic)

** Panel emboss may not align with windows due to size difference. Some size limitations apply.*

Additional double width door designs available. Double strength glass is standard.

DECORATIVE INSERT SERIES SPECIALTY GLASS OPTIONS


Clear, Frosted, Obscure, Rain, Clear Polycarbonate, Matte Polycarbonate

Plain and Snap-In Series windows are available single pane or insulated in clear, frosted, obscure and rain designs.

Clear acrylic also available.


Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance.

Acrylic windows require special cleaning. See care and maintenance manual.

Window heights may vary based on section height.

Impact rated windows available
(Mocha Brown is not available on impact rated windows)

ARCHITECTURAL SERIES SPECIALTY GLASS OPTIONS

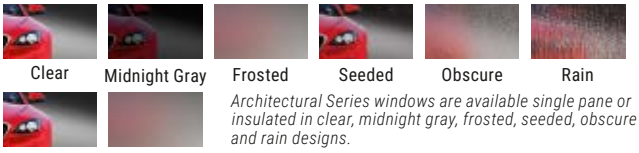
Clear, Midnight Gray, Frosted, Seeded, Obscure, Rain, Clear Polycarbonate, Matte Polycarbonate

Architectural Series windows are available single pane or insulated in clear, midnight gray, frosted, seeded, obscure and rain designs.

Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance.

Additional charges for optional glass apply.

CLASSIC™ STEEL

PREMIUM

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
Model 9200	8', 9' Wide Door	S +13/–15 PSF	SELECT W4	F T S +28/–29 PSF	F S +30/–32 PSF	(IR) F T W S +38/–44 PSF	SELECT W8	(IR) F T W +48/–60 PSF
	10', 12' Wide Door	S +12.5/–14 PSF	SELECT W4	F T S +25.5/–25.5 PSF	SELECT W6	U-BAR (IR) F W S +37/–40 PSF; TAPERED STRUT (IR) F T W S +38/–42 PSF	SELECT W8	TAPERED STRUT (IR) F T W +46/–52 PSF
	16' Wide Door	S +12.5/–14 PSF	SELECT W4	F T S +25.5/–25.5 PSF	SELECT W6	U-BAR (IR) F W S +37/–40 PSF; TAPERED STRUT (IR) F T W S +38/–42 PSF	SELECT W8	TAPERED STRUT (IR) F T W +46/–52 PSF
	18' Wide Door	S +12.5/–14 PSF	SELECT W4	F T S +24/–24.5 PSF	SELECT W6	TAPERED STRUT (IR) F T W S +38/–42 PSF	SELECT W8	TAPERED STRUT (IR) F T W +46/–50 PSF
Model 9203	8', 9' Wide Door	S +13/–15 PSF	SELECT W4	F T S +28/–29 PSF	F S +30/–32 PSF	(IR) F T S +38/–44 PSF	SELECT W8	(IR) F T +48/–60 PSF
	10', 12' Wide Door	S +12.5/–14 PSF	SELECT W4	F T S +25.5/–25.5 PSF	SELECT W6	U-BAR (IR) F S +37/–40 PSF; TAPERED STRUT (IR) F T S +38/–42 PSF	SELECT W8	TAPERED STRUT (IR) F T +46/–52 PSF
	16' Wide Door	S +12.5/–14 PSF	SELECT W4	F T S +25.5/–25.5 PSF	SELECT W6	U-BAR (IR) F S +37/–40 PSF; TAPERED STRUT (IR) F T S +38/–42 PSF	SELECT W8	TAPERED STRUT (IR) F T +46/–52 PSF
	18' Wide Door	S +12.5/–14 PSF	SELECT W4	F T S +24/–24.5 PSF	SELECT W6	TAPERED STRUT (IR) F T S +38/–42 PSF	SELECT W8	TAPERED STRUT (IR) F T +46/–50 PSF
Model 9130	8', 9' Wide Door	S +13/–15 PSF	F S +20/–20 PSF	F S +25/–28 PSF	(IR) F S +33/–37 PSF	F S +37/–37 PSF		
	10', 12' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	F S +24/–26 PSF	(IR) F S +32/–32 PSF			
	16' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	F S +24/–26 PSF	(IR) F S +32/–32 PSF			
	18' Wide Door	S +12.5/–14 PSF	SELECT W4	F S +24/–26 PSF				
Model 9133	8', 9' Wide Door	S +13/–15 PSF	F S +20/–20 PSF	F S +25/–28 PSF	(IR) F S +33/–37 PSF	F S +37/–37 PSF		
	10', 12' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	F S +24/–26 PSF	(IR) F S +32/–32 PSF			
	16' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	F S +24/–26 PSF	(IR) F S +32/–32 PSF			
	18' Wide Door	S +12.5/–14 PSF	SELECT W4	F S* +24/–26 PSF				
Model 4300	8', 9' Wide Door	S +13/–15 PSF	SELECT W4	(IR) F T W S +28/–29 PSF	SELECT W6	(IR) F T W S +38/–44 PSF	SELECT W8	(IR) F D T W +48/–60 PSF
	10', 12' Wide Door	S +12.5/–14 PSF	SELECT W4	(IR) F T W S +25.5/–25.5 PSF	SELECT W6	TAPERED STRUT (IR) F T D W S +38/–42 PSF	SELECT W8	TAPERED STRUT (IR) F T D W +46/–52 PSF
	16' Wide Door	S +12.5/–14 PSF	SELECT W4	(IR) F T W S +25.5/–25.5 PSF	SELECT W6	TAPERED STRUT (IR) F T D W S +38/–42 PSF	SELECT W8	TAPERED STRUT (IR) F T D W +46/–52 PSF
	18' Wide Door	S +12.5/–14 PSF	SELECT W4	(IR) F T W S +25/–25 PSF	SELECT W6	TAPERED STRUT (IR) F T D W S +38/–42 PSF	SELECT W8	TAPERED STRUT (IR) F T D W +46/–50 PSF
	20'2" Wide Door	SELECT W5	SELECT W5	SELECT W5	F S +30/–33 PSF	TAPERED STRUT (IR) F T W +37/–40 PSF		
Model 4310	8', 9' Wide Door	S +13/–15 PSF	SELECT W4	(IR) F T S +28/–29 PSF	SELECT W6	(IR) F T S +38/–44 PSF	SELECT W8	(IR) F D T +48/–60 PSF
	10', 12' Wide Door	S +12.5/–14 PSF	SELECT W4	(IR) F T S +25.5/–25.5 PSF	SELECT W6	TAPERED STRUT (IR) F T D S +38/–42 PSF	SELECT W8	TAPERED STRUT (IR) F T D +46/–52 PSF
	16' Wide Door	S +12.5/–14 PSF	SELECT W4	(IR) F T S +25.5/–25.5 PSF	SELECT W6	TAPERED STRUT (IR) F T D S +38/–42 PSF	SELECT W8	TAPERED STRUT (IR) F T D +46/–52 PSF
	18' Wide Door	S +12.5/–14 PSF	SELECT W4	(IR) F T S +25/–25 PSF	SELECT W6	TAPERED STRUT (IR) F T D S +38/–42 PSF	SELECT W8	TAPERED STRUT (IR) F T D +46/–50 PSF
	20'2" Wide Door	SELECT W5	SELECT W5	SELECT W5	F +30/–33 PSF	TAPERED STRUT (IR) F T W +37/–40 PSF		
Model 4050	8', 9' Wide Door	S +13/–15 PSF	F S +20/–21 PSF	SELECT W6	SELECT W6	F S +37/–37 PSF; (IR) F S +38/–42 PSF		
	10', 12' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	SELECT W5	(IR) F S +30/–30 PSF or +32/–32 PSF			
	16' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	SELECT W5	(IR) F S +30/–30 PSF or +32/–32 PSF			
	18' Wide Door	S +12.5/–14 PSF						
Model 4053	8', 9' Wide Door	S +13/–15 PSF	F S +20/–21 PSF	SELECT W6	SELECT W6	F S +37/–37 PSF; (IR) F S +38/–42 PSF		
	10', 12' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	SELECT W5	(IR) F S +30/–30 PSF or +32/–32 PSF			
	16' Wide Door	S +12.5/–14 PSF	F S +20/–21 PSF	SELECT W5	(IR) F S +30/–30 PSF or +32/–32 PSF			
	18' Wide Door	S +12.5/–14 PSF						

S Standard Windows Available
(IR) Impact Rated
W Patented Impact Windows Available
F Florida Approved
D Dade County Approved
T Texas Department of Insurance Approved

**Some heights not available due to weight restrictions.*
For W6 – W8 doors over 9' wide, add 2" to the door width.

Standard windows are not available in Texas.

VALUE PLUS (builder grade)

2-LAYER CONSTRUCTION





MODEL SPECS			
MODELS	76V/76VSP	94V	1500/15SP
Panel Styles	Long	Short	Short
Section Joint	Shiplap	Shiplap	Shiplap
Steel Gauge	25	24	25
Insulation Thickness	1-5/16"	1-5/16"	1-5/16"

Heavy-duty, 2-layer, steel construction with insulation for added comfort, energy efficiency and quiet operation.

STYLE AND CONSTRUCTION

- 2-layer construction (steel + vinyl-backed polystyrene insulation).
- Woodgrain embossed, insulated steel base door painted front and back for a virtually maintenance-free door.
- Quality 24 or 25 gauge steel and 2" thick frame construction for durability and longevity.
- Vinyl-backed insulation for a clean interior appearance.
- Polystyrene insulation: R-value 6.3.

Calculated door section R-value is in accordance with DASMA TDS-163.

PANEL OPTIONS

Traditional Short (1500, 15SP, 94V)

Traditional Long (76V, 76VSP)

COLOR OPTIONS



Standard White | Almond | Desert Tan | Sandtone | Chocolate | Black*

Due to the printing process, colors may vary.
**Not available on all models. Complete color availability can be found on pages 54–55. Additional charges apply.*

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1**	W2	W3	W4	W5				
		USE T52								
Models 1500/15SP	8', 9' Wide Door	S +13/–15 PSF	S +16/–18.5 PSF	F S +20/–21 PSF	Ⓘ F T W† S +25/–32 PSF	1500	Ⓘ F T W† S +30/–32 PSF	15SP	Ⓘ F W S +32/–37 PSF
	10', 12' Wide Door	S +12.5/–14 PSF	S +15.5/–17 PSF	F S +20/–21 PSF	Ⓘ F T W† S* +24/–24.5 PSF	1500	Ⓘ F T W† S +30/–30 or +28/–30.5 or +32/–32 PSF	15SP	TAPERED STRUT Ⓘ F W S +32/–37 PSF
	16' Wide Door	S +12.5/–14 PSF	S +15.5/–17 PSF	F S +20/–21 PSF	Ⓘ F T W† S* +24/–24.5 PSF	1500	Ⓘ F T W† S +30/–30 or +28/–30.5 or +32/–32 PSF	15SP	TAPERED STRUT Ⓘ F W S +32/–37 PSF
	18' Wide Door	S +12.5/–14 PSF	SELECT W4	SELECT W4	1500 TAPERED STRUT Ⓘ F T W† S* +25/–27 PSF				
Model 94V	8', 9' Wide Door	S +13/–15 PSF	S +16/–18.5 PSF	F S +20/–21 PSF	Ⓘ F T W S +25/–32 PSF	Ⓘ F T W S +30/–32 PSF			
	10', 12' Wide Door	S +12.5 / –14 PSF	S +15.5/–17 PSF	F S +20/–21 PSF	Ⓘ F T W S* +24/–24.5 PSF	Ⓘ F T W S +30/–30 or +28/–30.5 or +32/–32 PSF			
	16' Wide Door	S +12.5/–14 PSF	S +15.5/–17 PSF	F S +20/–21 PSF	Ⓘ F T W S* +24/–24.5 PSF	Ⓘ F T W S +30/–30 or +28/–30.5 or +32/–32 PSF			
	18' Wide Door	S +12.5/–14 PSF	SELECT W4	SELECT W4	Ⓘ F T W S* +25/–25 PSF				
Models 76V/76VSP	8', 9' Wide Door	S +13/–15 PSF	SELECT W4	SELECT W4	Ⓘ F T +25/–32 PSF	76V	Ⓘ F T +30/–32 PSF	76VSP	Ⓘ F +32 /–37 PSF
	10', 12' Wide Door	S +12.5/–14 PSF	SELECT W5	SELECT W5	SELECT W5	SELECT W5		76VSP	TAPERED STRUT Ⓘ F +32/–37 PSF
	16' Wide Door	S +12.5/–14 PSF	SELECT W5	SELECT W5	SELECT W5	SELECT W5		76VSP	TAPERED STRUT Ⓘ F +32/–37 PSF
	18' Wide Door	+12.5/–14 PSF							

S Standard Windows Available
Ⓘ Impact Rated
W Patented Impact Windows Available
F Florida Approved
D Dade County Approved
T Texas Department of Insurance Approved

For W6–W8 doors over 9' wide, add 2" to the door width.
**Long window availability is limited due to reinforcement requirements.*

***For W1, Model T52 is used. Model T52 is a tongue-and-groove, 2-layer door.*
†Impact windows are not available in Texas.

CLASSIC™ STEEL

VALUE (builder grade)

1-LAYER CONSTRUCTION





Value Traditional Short Panel shown in Standard White

MODEL SPECS

MODELS	73	76	94
Panel Styles	Traditional Short	Traditional Long	Traditional Short
Steel Gauge	25	25	24
Insulation Thickness	N/A	N/A	N/A

Single-layer, non-insulated steel construction provides beauty and durability at an economical value.

STYLE AND CONSTRUCTION

- 1-layer construction (steel).
- Woodgrain embossed steel base door painted front and back for a virtually maintenance-free door.
- Quality 24 or 25 gauge steel and 2" thick frame construction for durability and longevity.
- Woodgrain textured short and long raised panel designs in 1-layer construction complement traditional home styles.

PANEL OPTIONS

Traditional Short (73, 94)

Traditional Long (76)

COLOR OPTIONS


Standard White | Almond | Desert Tan | Sandtone | Chocolate | Black*

Due to the printing process, colors may vary.
**Not available on all models. Complete color availability can be found on pages 54–55. Additional charges apply.*

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1**	W2	W3	W4	W5	W6	W7	W8	W9
		USE T50								
Model 94	8', 9' Wide Door	S *+13/–15 PSF*	S *+16/–18.5 PSF*	FS *+20/–21 PSF*	FTWS *+25/–32 PSF*	FTWS *+30/–32 PSF*	FTWS* *+38/–42 PSF*	FDW *+42/–48 PSF*	FW† *+48/–54 or +54/–62 PSF*	FDW *+62/–72 PSF*
	10', 12' Wide Door	S *+12.5 / –14 PSF*	S *+15.5/–17 PSF*	FS *+20/–21 PSF*	FTWS* *+24/–24.5 PSF*	FTWS *+30/–30 or +28/–30.5 or +32/–32 PSF*	TAPERED STRUT FTDWS* *+38/–42 PSF*	FW *+42/–48 PSF*	TAPERED STRUT FDW *+46/–50 PSF*	
	16' Wide Door	S *+12.5/–14 PSF*	S *+15.5/–17 PSF*	FS *+20/–21 PSF*	FTWS* *+24/–24.5 PSF*	FTWS *+30/–30 or +28/–30.5 or +32/–32 PSF*	TAPERED STRUT FTDWS* *+38/–42 or +36/–42 PSF*	FW *+42/–48 PSF*	TAPERED STRUT FDW *+46/–50 PSF*	
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W4	SELECT W4	FTWS* *+25/–25 PSF*	SELECT W6	TAPERED STRUT FTDWS* *+36/–42 PSF*	TAPERED STRUT FDW *+41/–46 PSF*		

CLASSIC™ STEEL

VALUE (builder grade)



WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1**	W2	W3	W4	W5		W6	W7	W8
		USE T50								
Models 73/73SP	8', 9' Wide Door	S *+13/–15 PSF*	S *+16/ –18.5 PSF*	F S *+20/–21 PSF*	F T W‡ S *+25/–32 PSF*	*73* F T W‡ S *+30/–32 PSF*	*73SP* F W S *+32/–37 PSF*	F T W S *+38/–44 PSF*	F W *+42/–48 PSF*	F W *+46/–50 PSF*
	10', 12' Wide Door	S *+12.5/–14 PSF*	S *+15.5/ –17 PSF*	F S *+20/–21 PSF*	F T W‡ S *+24/–24.5 PSF*	*73* F T W‡ S *+28/–30.5 or +30/–30 or +32/–32 PSF*	TAPERED STRUT *73SP* F W S *+32/–37 PSF*	TAPERED STRUT F T W S *+36/–42 PSF*		
	16' Wide Door	S *+12.5/–14 PSF*	S *+15.5/–17 PSF*	F S *+20/–21 PSF*	F T W‡ S *+24/–24.5 PSF*	*73* F T W‡ S *+28/–30.5 or +30/–30 or +32/–32 PSF*	TAPERED STRUT *73SP* F W S *+32/–37 PSF*	TAPERED STRUT F T W S *+36/–42 PSF*		
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W4	SELECT W4	TAPERED STRUT *73* F T W‡ S *+25/–27 PSF*	SELECT W6		TAPERED STRUT F T W S *+36/–42 PSF*		
Models 76/76SP	8', 9' Wide Door	S *+13/–15 PSF*	S *+16/ –18.5 PSF*	F S *+20/–21 PSF*	F T W‡ S *+25/–32 PSF*	*76* F T *+30/–32 PSF*	*76SP* F *+32/–37 PSF*	F T *+38/–44 PSF*		
	10', 12' Wide Door	S *+12.5/–14 PSF*	S *+15.5/ –17 PSF*	F S *+20/–21 PSF*	F T W‡ S *+24/–24.5 PSF*	*76* F T *+28/–30.5 or +30/–30 or +32/–32 PSF*	TAPERED STRUT *76SP* F *+32/–37 PSF*	TAPERED STRUT F *+36/–42 PSF*		
	16' Wide Door	S *+12.5/–14 PSF*	S *+15.5/–17 PSF*	F S *+20/–21 PSF*	F T W‡ S *+24/–24.5 PSF*	*76* F T *+28/–30.5 or +30/–30 or +32/–32 PSF*	TAPERED STRUT *76SP* F *+32/–37 PSF*	TAPERED STRUT F *+36/–42 PSF*		
	18' Wide Door	*+12.5/–14 PSF*	SELECT W4	SELECT W4	TAPERED STRUT *76* F T W‡ S *+25/–27 PSF*	SELECT W6		TAPERED STRUT F *+36/–42 PSF*		

S Standard Windows Available
F Florida Approved
W Patented Impact Windows Available
D Dade County Approved
T Texas Department of Insurance Approved
Impact Rated

For W6 –W8 doors over 9' wide, add 2" to the door width.
**Long window availability is limited due to reinforcement requirements.*

***For W1, Model T50 is used. Model T50 is a tongue-and-groove, 1-layer door.*
†Impact windows available at +48/– 54 PSF.
‡Impact windows not available in Texas.

VALUE PLUS & VALUE



Value Traditional Short Panel with Prairie 510 Window Design shown in Standard White

WINDOW OPTIONS

DECORATIVE INSERT SERIES

Available on These Models: 73, 73SP, 76, 76SP, 76V, 76VSP, 94, 94V, 1500, 15SP



Plain Short



Plain Long



Charleston 508



Colonial 509



Prairie 510



Sunset 501 *(4, 6, 8 or 10 panels across)*



Sunset 502 *(3, 6 or 9 panels across)*



Sunset 503 *(4 or 8 panels across)*



Sunset 504 *(7 panels across only)*



Sunset 505 *(8 panels across only)*



Sunset 506 *(5 or 10 panels across)*



Charleston 608



Prairie 610



Stockton 612



Madison 611



Madison Arch 613



Sunset 601 *(2, 3, 4 or 5 long panels across)*



Sunset 603 *(2 or 4 long panels across)*




Sunset 605 *(4 long panels across)*

SPECIALTY GLASS OPTIONS



Clear



Frosted




Obscure



Rain



Clear Polycarbonate



Matte Polycarbonate

Plain and Snap-In Series windows are available single pane or insulated in clear, frosted, obscure and rain designs.

Clear acrylic also available.

Impact rated windows are available in clear and matte polycarbonate and may have a wavy appearance.

Additional charges for optional glass apply.

Acrylic windows require special cleaning. See care and maintenance manual.

Window heights may vary based on section height.

Impact rated windows available

(Mocha Brown is not available on impact rated windows)

GRAND HARBOR® (builder grade)

HANDCRAFTED 3 OR 2-LAYER CONSTRUCTION





Grand Harbor® Model GH12 Shown in Standard White with SQ22 Window Design


When budget is the deciding factor, this low maintenance, insulation-optional steel frame, carriage house style garage door combines clean lines and classic charm to provide a popular style at a great value. Accented with decorative black wrought iron hardware, these doors have the appearance of a swing-out door, but offer the convenience of modern overhead operation.

STYLE AND CONSTRUCTION


- Woodgrain embossed 24 gauge, 2" steel frame construction with 1/2" smooth composite overlay creates authentic carriage house styling.
- Model GH is non-insulated.
- Model GHV has 1-5/8" vinyl-backed insulation that improves energy efficiency with a 6.3 R-value.
- Available in 8 different designs.
- Window options include square, rectangular and arch windows with removable grilles. Glazing includes DSB clear or obscure glass and acrylic wrought iron designs. Unique faux window top sections are also an option.

Calculated door section R-value is in accordance with DASMA TDS-163.

DOOR DESIGNS

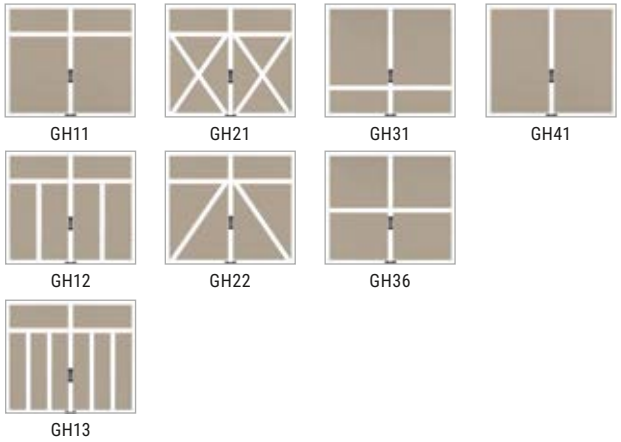

WINDOW OPTIONS

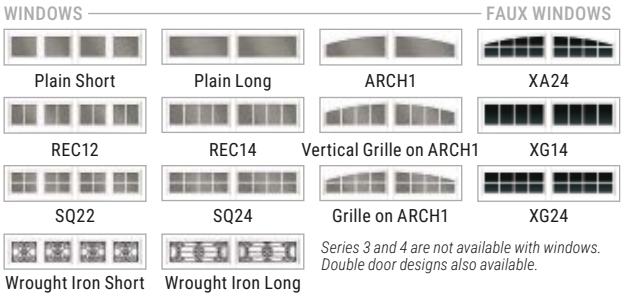

Series 3 and 4 are not available with windows. Double door designs also available.

Acrylic windows require special cleaning. See care and maintenance manual.

COLOR OPTIONS



Overlay available in Standard White only.

Due to the printing process, colors may vary.

WINDCODE® AVAILABILITY CHART


	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
Grand Harbor®	8', 9' Wide Door	S *+12/–15 PSF*	SELECT W4	F S *+25/–32 PSF*	F S* *+30/–32 PSF*	F T S* *+38/–44 PSF*	SELECT W8	F D *+50/–58 PSF*
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S* *+24/–24.5 PSF*	F S* *+30/–30 PSF*	TAPERED STRUT F S* *+38/–42 PSF*	SELECT W8	F D *+46/–52 PSF*
	18' Wide Door	S *+12.5/–14 PSF*	SELECT W4	F S* *+25/–25 PSF*				

S Standard Windows Available
F Florida Approved
D Dade County Approved
T Texas Department of Insurance Approved
W Patented Impact Windows Available
Impact Rated

For W6–W8 doors over 9' wide, add 2" to the door width.
**Long window availability is limited due to reinforcement requirements.*

LIMITED EDITION

HANDCRAFTED 5 OR 4-LAYER CONSTRUCTION

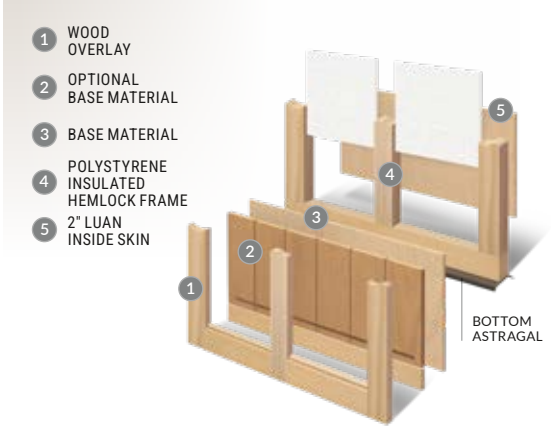



Reserve® Wood Limited Edition Design 8

Distinguish your home with Clopay's Reserve® Wood Limited Edition garage doors, a line of eight polystyrene insulated wood door styles based on the most inspired (and requested) custom designs.

STYLE AND CONSTRUCTION

- Doors are available in 8 designs with 13 window/top section styles.
- Standard and optional decorative hardware available.
- Handcrafted, 5 or 4-layer construction, polystyrene insulated wood door with a 5.9 R-value.
- 1/4" thick, imported hardwood interior backer glued to stiles and rails.
- Tongue-and-groove section joint.
- All doors can be factory primed or finish painted White. Factory stain available for stained grade wood species.

Calculated door section R-value is in accordance with DASMA TDS-163.

DOOR DESIGNS

Doors shown 8' wide × 7' high.



WINDOW OPTIONS



Double door designs also available.

SPECIALTY GLASS OPTIONS



Windows are single pane and double strength 1/8" thick. Additional charges for optional glass apply.

MATERIAL OPTIONS

OVERLAYS



BASE FACE MATERIALS



**Extira® wood doors cannot be stained.*
***On Tongue-and-Groove (T&G) base doors, the wood species must match overlay species.*

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
Limited Edition	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W6	SELECT W6	SELECT W6	F S *+39/–45 PSF*	SELECT W8	F D W *+47/–55 PSF*
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W7	SELECT W7	SELECT W7	SELECT W7	F W *+41/–48 PSF*	
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W7	SELECT W7	SELECT W7	SELECT W7	F W *+41/–48 PSF*	
	18' Wide Door							


S Standard Windows Available
F Florida Approved
W Patented Impact Windows Available
D Dade County Approved
T Texas Department of Insurance Approved
Impact Rated

For W6–W8 doors over 9' wide, add 2" to the door width.

RESERVE® WOOD

MODERN

HANDCRAFTED 4-LAYER CONSTRUCTION

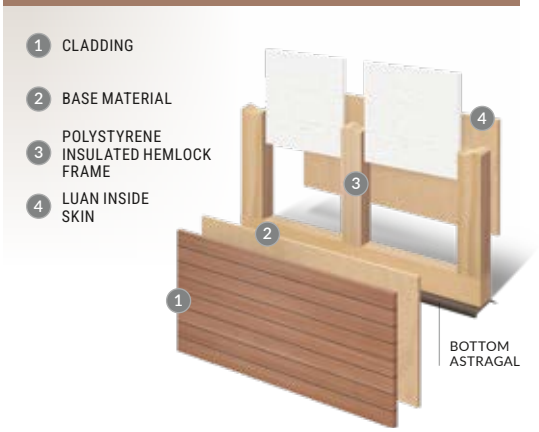



Reserve® Wood Modern Accent Strip Design in Light Cedar

Clean lines and simple forms let the beauty of natural wood stand out. The versatile Reserve® Wood Modern garage doors let you mix materials, shape and tone to create a stunning contemporary garage door that blends beautifully with other woods and materials on your exterior.

STYLE AND CONSTRUCTION

- Handcrafted, 4-layer construction, polystyrene insulated wood door with a 5.9 R-value.
- Built with a sleek contemporary style and convenient upward-acting operation.
- Offset Window models feature a variety of short and long window options that come standard with clear tempered glass.
- Accent Strip models feature decorative flush aluminum accent strips to provide a beautiful contrast of materials. The result is a look that is modern as well as elegant.
- Heavy-duty hinges, rollers and track provide smooth, quiet, long-lasting operation.
- Replaceable vinyl bottom weatherseal in a corrosion-resistant retainer helps seal out the elements.
- All doors can be factory primed or finish painted White. Factory stain available for stained grade wood species.

Calculated door section R-value is in accordance with DASMA TDS-163.


DOOR DESIGNS

Doors shown 8' wide × 7' high.


Offset Window | Accent Strip | Horizontal Cladding

Accent Strip and Horizontal Cladding models are available spliced and unspliced. Unspliced models are available up to 10' wide.

OFFSET WINDOW DESIGNS

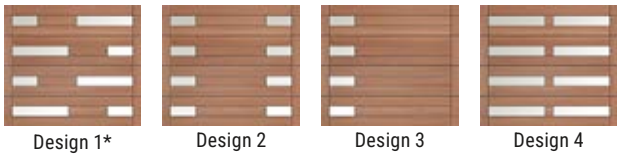
Design 1* | Design 2 | Design 3 | Design 4


Design 5 | Design 6* | Design 7

Note: All designs shown are illustrated from the exterior of the garage.

Door designs must be ordered based on the view from the interior of the garage.

All right-hand designs are shown. Designs 1, 3, 5 and 6 are also available left-handed.

**Not available 10'1" to 13'6". Special order only.*

SPECIALTY GLASS OPTIONS


Seeded | Frosted Gluechip | Obscure | Delta Frost | Frosted | Narrow Reed | Rain

Windows are single pane and double strength 1/8" thick. Additional charges for optional glass apply.

MATERIAL OPTIONS


Light Cedar | Dark Cedar | Mixed Cedar | Redwood | Fir | Meranti

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
Modern	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W6	SELECT W6	SELECT W6	F S *+39/–45 PSF*	SELECT W8	F D *+47/–55 PSF*
	10', 12' Wide Door	S *+12.5/–14 PSF*	SELECT W7	SELECT W7	SELECT W7	SELECT W7	F *+41/–48 PSF*	
	16' Wide Door	S *+12.5/–14 PSF*	SELECT W7	SELECT W7	SELECT W7	SELECT W7	F *+41/–48 PSF*	
	18' Wide Door							


S Standard Windows Available
Impact Rated
W Patented Impact Windows Available
F Florida Approved
D Dade County Approved
T Texas Department of Insurance Approved

For W6–W8 doors over 9' wide, add 2" to the door width.

RESERVE® WOOD

SEMI-CUSTOM

HANDCRAFTED 2-LAYER CONSTRUCTION

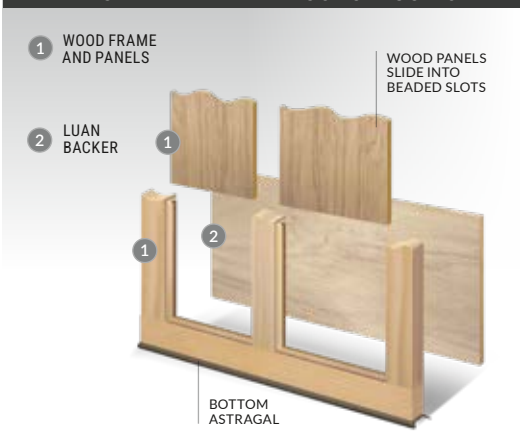



Reserve® Wood Semi-Custom Design 4 in Mixed Cedar with ARCH3 Window Design; factory stain finished in Dark Oak

Just because your garage door is a standard size doesn't mean it deserves a standard, cookie-cutter door. That's why Clopay has created its Reserve® Wood Semi-Custom garage doors. These upward-acting wood doors operate just like conventional, modern garage doors.

STYLE AND CONSTRUCTION

- Handcrafted, 2-layer wood doors. Swing-out appearance – modern operation.
- Semi-Custom available in 6 door designs and 10 window or top sections for multiple door design options.
- Windows are single pane and double strength 1/8" thick.
- Premium grade hardware, rollers and track assure smooth, quiet, long-lasting operation.

SPECIALTY GLASS OPTIONS


Seeded | Frosted Gluechip | Obscure | Delta Frost | Frosted | Narrow Reed | Rain

Additional charges for optional glass apply.

DOOR DESIGNS


Doors shown 8' wide × 7' high.


Design 1 | Design 2 | Design 3 | Design 4


Design 5 | Design 6


WINDOW OPTIONS


REC13 | REC14 | SQ23 | SQ24


ARCH3 | ARCH4 | ARCH13 | ARCH14

Double door designs also available.

MATERIAL OPTIONS

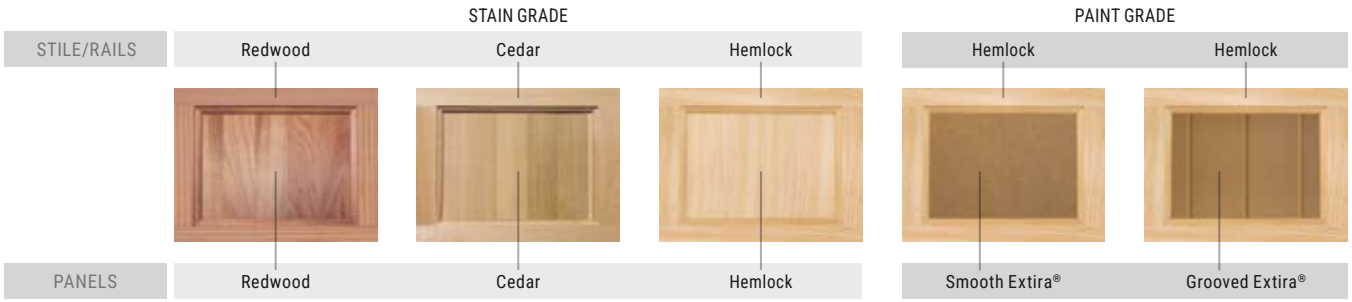

Differences in grain and color variations are indicative of natural wood.

Paint grade and grooved doors cannot be stained.

WINDCODE® AVAILABILITY CHART

	Common Door Widths	W1	W3	W4	W5	W6	W7	W8
Semi-Custom	8', 9' Wide Door	S *+13/–15 PSF*	SELECT W5	SELECT W5	F S *+32/–36 PSF*			
	10', 12' Wide Door	S *+12/–14 PSF*	SELECT W5	SELECT W5	F S* *+30/–33.3 PSF*			
	16' Wide Door	S *+12/–14 PSF*	SELECT W5	SELECT W5	F S* *+30/–33.3 PSF*			
	18' Wide Door							

S Standard Windows Available
Impact Rated
W Patented Impact Windows Available
F Florida Approved
D Dade County Approved
T Texas Department of Insurance Approved

**Available only in Hemlock.*

RESERVE® WOOD

FACTORY FINISHES



Clopay stain-grade wood doors of any species are available in nine beautiful stain colors. Custom stain and paint color finishes are available upon request. See your Clopay Dealer for the Clopay Wood brochure or to view stained wood samples in person.



Natural



Natural Oak



Cedar



Teak



Mahogany



Butternut



Dark Oak



Ebony Wash




Dark Oak Ebony


Painted White*

Note: Printed colors shown here may vary from actual product colors. Clopay stain colors shown on Hemlock wood.
**Custom colors are available.*

3-LAYER STAIN PROCESS

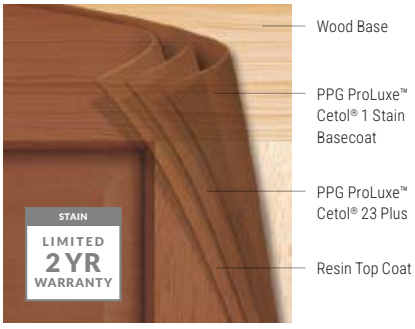

3-LAYER PAINT PROCESS

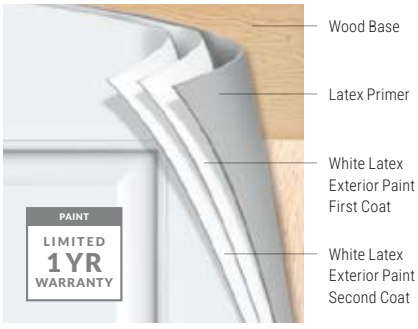

WOOD DOOR CARE

- Proper care and maintenance are imperative to the appearance, longevity and performance of all wood doors.
- Doors must be painted or stained on all six sides prior to installation. Failure to follow the installation and maintenance instructions will void the warranty.
- Please refer to the installation and maintenance manual or go to www.clopaydoor.com for additional information about caring for a wood door.

PRODUCT SELECTION CHART

Garage Door	Type	Model/Design	Door/Panel Style	Sect. Hts.	Construction/Material	Colors
Avante®		AX/AXU with Section Joint Seal	Contemporary	18", 21", 24"	Aluminum Frame + Glass/Acrylic Panels Aluminum Frame + Aluminum Panels Aluminum Frame + C-Power™ enabled Click-to-Conceal™ Panels	Clear Aluminum Anodized, Standard White, Bronze Painted, Chocolate Painted, Bronze Anodized, Black Anodized, Dark Bronze Anodized or Powder Coated Custom Colors
VertiStack Avante®		VSAX/VSAXU with Section Joint Seal	Contemporary	18", 21", 24"	Aluminum Frame + Glass/Acrylic Panels Aluminum Frame + Aluminum Panels	Clear Aluminum Anodized, Standard White, Bronze Painted, Chocolate Painted, Bronze Anodized, Black Anodized, Dark Bronze Anodized or Powder Coated Custom Colors
Avante® Sleek		AZ6, AZ6U with Section Joint Seal	Contemporary	18", 21", 24"	Aluminum Frame + Glass Aluminum Frame + C-Power™ enabled Click-to-Conceal™ Panels	Standard White, Bronze Painted, Chocolate Painted, Bronze Anodized, Black Anodized, Dark Bronze Anodized or Powder Coated Custom Colors
Canyon Ridge®	Carriage House 5-Layer	15 Door Designs, 14 Window or Solid Top Section Designs	Carriage House	18", 21", 24"	5 Layers: Clear Cypress and Mahogany textures; Steel + 2" Intellicore® Polyurethane Insulation + Steel + Cladding + Overlay [6]	Natural Finish, Medium Finish, Dark Finish, Walnut Finish, Slate Finish, Bronze Finish, Charcoal Finish, Espresso Finish, Black Finish, White Finish, Primed (for those wishing to custom paint or stain their door)
Canyon Ridge®	Carriage House 4-Layer	14 Door Designs, 14 Window or Solid Top Section Designs	Carriage House	18", 21", 24"	4 Layers: Clear Cypress, Mahogany and Ultra-Grain®/Solid Steel textures; Steel + 2" Intellicore® Polyurethane Insulation + Steel + Overlay [6]	Natural Finish, Medium Finish, Dark Finish, Walnut Finish, Slate Finish, Bronze Finish, Charcoal Finish, Espresso Finish, Black Finish, White Finish, Primed (for those wishing to custom paint or stain their door)
Canyon Ridge®	Elements	13 Door Designs, 10 Window or Solid Top Section Designs	Carriage House	18", 21", 24"	4 Layers: Steel + 1-3/8" Bonded Polystyrene Insulation + Steel + Composite	Standard White, Desert Tan, Bronze, Charcoal, Iron Ore, Black
Canyon Ridge®	Chevron	8 Door Designs, 4 Cladding Design Options, 14 Window or Solid Top Section Designs	Carriage House	18", 21", 24"	5 Layers: Clear Cypress and Mahogany textures; Steel + 2" Intellicore® Polyurethane Insulation + Steel + Cladding + Overlay [6]	Natural Finish, Medium Finish, Dark Finish, Walnut Finish, Slate Finish, Bronze Finish, Charcoal Finish, Espresso Finish, Black Finish, White Finish, Primed (for those wishing to custom paint or stain their door)
Canyon Ridge®	Louver	12 Door Designs, 6 Window or Solid Top Section Designs	Plantation Shutter	18", 21", 24"	5 Layers: Clear Cypress, Mahogany, Ultra-Grain®/Solid Steel and Louver Mahogany textures; Steel + 2" Intellicore® Polyurethane Insulation + Steel + Cladding + Overlay [6]	Natural Finish, Medium Finish, Dark Finish, Walnut Finish, Slate Finish, Bronze Finish, Charcoal Finish, Espresso Finish, Black Finish, White Finish, Primed (for those wishing to custom paint or stain their door)
Canyon Ridge®	Modern	4 Door Designs	Contemporary	18", 21", 24"	4 Layers: Clear Cypress and Mahogany textures; Steel + 2" Intellicore® Polyurethane Insulation + Steel + Cladding or Overlay [6]	Natural Finish, Medium Finish, Dark Finish, Walnut Finish, Slate Finish, Bronze Finish, Charcoal Finish, Espresso Finish, Black Finish, White Finish, Primed (for those wishing to custom paint or stain their door)
Coachman®		15 Door Designs, 10 Window or Solid Top Section Designs	Carriage House	18", 21", 24"	4 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel + Composite [6] Steel + 2" Bonded Polystyrene Insulation + Steel + Composite [6] Steel + 1-3/8" Bonded Polystyrene Insulation + Steel + Composite	Base: Standard White, Almond, Desert Tan, Sandtone Overlay: Standard White, Almond, Desert Tan, Sandtone
Grand Harbor®		8 Door Designs, 16 Window or Solid Top Section Designs	Carriage House	18", 24"	3 or 2 Layers: Composite + Steel + Insulation, Composite + Steel	Base: Standard White, Almond, Desert Tan, Sandtone Overlay: Standard White
Gallery® Steel	Three-Layer	2 Door Designs, 25 Window or Solid Top Section Designs	Carriage House	18", 21", 24"	3 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel [6] Steel + 1-3/8" Intellicore® Polyurethane Insulation + Steel [5] Steel + 2" Bonded Polystyrene Insulation + Steel [6] Steel + 1-3/8" Bonded Polystyrene Insulation + Steel	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Lustra™ Black[2], Lustra™ Charcoal[2], Lustra™ Silver[2], Ultra-Grain® Oak: Medium, Dark, Walnut and Slate Finishes
Gallery® Steel	Two-Layer and One-Layer	2 Door Designs, 25 Window or Solid Top Section Designs	Carriage House	18", 21", 24"	2 or 1 Layers: Steel + 1-5/16" Polystyrene Insulation; Steel	Standard White, Almond, Desert Tan, Sandtone, Chocolate, Black[1], Ultra-Grain® Oak: Walnut and Slate Finishes[1]
Bridgeport™ Steel	Three-Layer	2 Door Designs, 25 Window or Solid Top Section Designs	Shaker (Narrow and Extended Recessed)	18", 21", 24"	3 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel [6] Steel + 1-3/8" Intellicore® Polyurethane Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Lustra™ Black[2], Lustra™ Charcoal[2], Lustra™ Silver[2], Ultra-Grain® Oak: Medium, Dark, Walnut and Slate Finishes
Bridgeport™ Steel	Two-Layer and One-Layer	2 Door Designs, 25 Window or Solid Top Section Designs	Shaker (Narrow and Extended Recessed)	18", 21", 24"	2 or 1 Layers: Steel + 1-5/16" Polystyrene Insulation; Steel	Standard White, Almond, Desert Tan, Sandtone, Chocolate, Black[1], Ultra-Grain® Oak: Walnut and Slate Finishes[1]
Bridgeport™ Inlay	Three-Layer	3 Inlay Patterns, 25 Window or Solid Top Section Designs	Shaker (Extended Recessed with Inlay)	21", 24"	3 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel [6] Steel + 1-3/8" Intellicore® Polyurethane Insulation + Steel [5]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Ultra-Grain® Oak: Medium, Dark, Walnut and Slate Finishes
Bridgeport™ Inlay	Two-Layer and One-Layer	3 Inlay Patterns, 25 Window or Solid Top Section Designs	Shaker (Extended Recessed with Inlay)	21", 24"	2 or 1 Layers: Steel + 1-5/16" Polystyrene Insulation; Steel	Standard White, Almond, Desert Tan, Sandtone, Chocolate, Black[1], Ultra-Grain® Oak: Walnut and Slate Finishes[1]

Garage Door	Type	Model/Design	Door/Panel Style	Sect. Hts.	Construction/Material	Colors
Modern Steel™	Premium	9202, 9201 No Panel	Modern Flush	18", 21", 24"	3 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Hunter Green[4], Ultra-Grain® Cypress: Medium, Cherry, Walnut and Slate Finishes[3]
Modern Steel™	Premium	9208 No Panel	Modern Flush	18", 21", 24"	3 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Lustra™ Black, Lustra™ Charcoal, Lustra™ Silver, Ultra-Grain® Cypress: Medium, Cherry, Walnut and Slate Finishes, Ultra-Grain® Plank: Coastal Gray, Natural, Cedar, Kona, Barnwood and Espresso Finishes
Modern Steel™	Premium	9205 No Panel	Modern Grooved	18", 21", 24"	3 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Ultra-Grain® Cypress: Medium, Cherry, Walnut and Slate Finishes
Modern Steel™	Premium	9209 No Panel	Modern Grooved	18", 21", 24"	3 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Lustra™ Black, Lustra™ Charcoal, Lustra™ Silver, Ultra-Grain® Cypress: Medium, Cherry, Walnut and Slate Finishes
Modern Steel™	Premium	9132, 9138 No Panel	Modern Flush	18", 21", 24"	3 Layers: Steel + 1-3/8" Intellicore® Polyurethane Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Hunter Green[4], Ultra-Grain® Cypress: Medium, Cherry, Walnut and Slate Finishes
		9131		18", 21"		
Modern Steel™	Premium	9139 No Panel	Modern Grooved	18", 21", 24"	3 Layers: Steel + 1-3/8" Intellicore® Polyurethane Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Ultra-Grain® Cypress: Medium, Cherry, Walnut and Slate Finishes
Modern Steel™	Premium	4302, 4308 No Panel	Modern Flush	18", 21", 24"	3 Layers: Steel + 2" Bonded Polystyrene Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Hunter Green[4], Ultra-Grain® Cypress: Medium, Cherry, Walnut and Slate Finishes[3]
		4301		18", 21"		
Modern Steel™	Premium	4305, 4309 No Panel	Modern Grooved	18", 21", 24"	3 Layers: Steel + 2" Bonded Polystyrene Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Ultra-Grain® Cypress: Medium, Cherry, Walnut and Slate Finishes
Modern Steel™	Premium	4132 No Panel	Modern Flush	18", 21", 24"	3 Layers: Steel + 1-3/8" Bonded Polystyrene Insulation + Steel	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Ultra-Grain® Cypress: Medium, Cherry, Walnut and Slate Finishes
Modern Steel™	Premium	4051 No Panel	Modern Flush	18", 21"	3 Layers: Steel + 1-3/8" Bonded Polystyrene Insulation + Steel	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Black
Modern Steel™	Premium	4138 No Panel	Modern Flush	18", 21", 24"	3 Layers: Steel + 1-3/8" Bonded Polystyrene Insulation + Steel	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Ultra-Grain® Cypress: Medium, Cherry, Walnut and Slate Finishes
Modern Steel™	Value	4F No Panel	Modern Flush	18", 21"	1 Layer: Steel	Standard White, Almond, Desert Tan, Sandtone, Chocolate, Black
Modern Steel™	Value	4F4 No Panel	Modern Flush	18", 21"	1 Layer: Steel	Standard White, Almond, Desert Tan, Sandtone, Chocolate

PRODUCT SELECTION CHART

Garage Door	Type	Model/Design	Door/Panel Style	Sect. Hts.	Construction/Material	Colors
Classic™ Steel	Premium	9200 Raised Panel	Elegant Short	18", 21"	3 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Hunter Green, Ultra-Grain® Classic: Medium, Cherry and Walnut Finishes
Classic™ Steel	Premium	9203 Raised Panel	Elegant Long	18", 21"	3 Layers: Steel + 2" Intellicore® Polyurethane Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Hunter Green, Ultra-Grain® Classic: Medium, Cherry and Walnut Finishes
Classic™ Steel	Premium	9130 Raised Panel	Elegant Short	18", 21"	3 Layers: Steel + 1-3/8" Intellicore® Polyurethane Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Hunter Green, Ultra-Grain® Classic: Medium, Cherry and Walnut Finishes
Classic™ Steel	Premium	9133 Raised Panel	Elegant Long	18", 21"	3 Layers: Steel + 1-3/8" Intellicore® Polyurethane Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Hunter Green, Ultra-Grain® Classic: Medium, Cherry and Walnut Finishes
Classic™ Steel	Premium	4300 Raised Panel	Elegant Short	18", 21"	3 Layers: Steel + 2" Bonded Polystyrene Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Hunter Green, Ultra-Grain® Classic: Medium, Cherry and Walnut Finishes
Classic™ Steel	Premium	4310 Raised Panel	Elegant Long	18", 21"	3 Layers: Steel + 2" Bonded Polystyrene Insulation + Steel [6]	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Mocha Brown, Charcoal, Iron Ore, Black, Hunter Green, Ultra-Grain® Classic: Medium, Cherry and Walnut Finishes
Classic™ Steel	Premium	4050 Raised Panel	Elegant Short	18", 21"	3 Layers: Steel + 1-3/8" Bonded Polystyrene Insulation + Steel	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Black
Classic™ Steel	Premium	4053 Raised Panel	Elegant Long	18", 21"	3 Layers: Steel + 1-3/8" Bonded Polystyrene Insulation + Steel	Standard White, Almond, Desert Tan, Sandtone, Bronze, Chocolate, Black
Classic™ Steel	Value Plus	1500 and 15SP Raised Panel	Traditional Short	18", 21"	2 Layers: Steel + 1-5/16" Polystyrene Insulation	Standard White, Almond, Desert Tan, Sandtone, Chocolate
Classic™ Steel	Value Plus	94V Raised Panel	Traditional Short	18", 21"	2 Layers: Steel + 1-5/16" Polystyrene Insulation	Standard White, Almond, Desert Tan, Sandtone, Chocolate, Black
Classic™ Steel	Value Plus	76V and 76VSP Raised Panel	Traditional Long	18", 21"	2 Layers: Steel + 1-5/16" Polystyrene Insulation	Standard White, Almond, Desert Tan, Sandtone, Chocolate
Classic™ Steel	Value[5]	73 Raised Panel	Traditional Short	18", 21"	1 Layer: Steel	Standard White, Almond, Desert Tan, Sandtone, Chocolate
Classic™ Steel	Value[5]	94 Raised Panel	Traditional Short	18", 21"	1 Layer: Steel	Standard White, Almond, Desert Tan, Sandtone, Chocolate, Black
Classic™ Steel	Value[5]	76 Raised Panel	Traditional Long	18", 21"	1 Layer: Steel	Standard White, Almond, Desert Tan, Sandtone, Chocolate

Garage Door	Type	Model/Design	Door/Panel Style	Sect. Hts.	Construction/Material	Finishing Options
Reserve® Wood	Custom	Custom	Carriage House	Varies	5 or 4 Layers: Specified Wood; Insulated	Stained, Finish Painted White, Primed, Unfinished
Reserve® Wood	Limited Edition	8 Door Designs, 13 Window or Solid Top Section Designs	Carriage House	Varies	5 or 4 Layers: Meranti, Cedar, Redwood, Fir, Extira®, Luan; Insulated	Stained, Finish Painted White, Primed, Unfinished
Reserve® Wood	Modern	3 Door Designs	Contemporary	Varies	4 Layers: Light Cedar, Dark Cedar, Mixed Cedar, Redwood, Fir, Meranti	Stained, Finish Painted White, Primed, Unfinished
Reserve® Wood	Semi-Custom	6 Door Designs, 10 Window or Solid Top Section Designs	Carriage House	22.75", 28"	2 Layers: Hemlock, Cedar, Redwood, Extira®	Stained, Finish Painted White, Primed, Unfinished

[1] Not available on 25 gauge models.
[2] Available on 2" Intellicore® polyurethane models.
[3] Not available on Models 9201, 4301.
[4] Not available on Models 9202, 9132, 9138, 4302, 4308.
[5] Not all models available in all regions. See your Clopay Dealer for model availability in your region.
[6] Models come standard with 10-ball nylon rollers and heavy-duty 14 gauge steel hinges.
These models also comply with 2015 IECC air infiltration requirement of 0.40 cfm/ft² or less (IECC, Section C402.5.2).

Effective July 2026
(Subject to change without notice)



Canyon Ridge® Carriage House 4-Layer Design 11; Shown in Ultra-Grain® Cypress Medium Finish with Clear Cypress Overlays in Medium Finish
Photo Credit: Andy Frame Photography



Modern Steel™ Modern Flush Panel; Shown in Ultra-Grain® Cypress Medium Finish with Plain Long Windows down left side
Photo Credit: Healthier Homes by JS2 Partners

Clopay®

MADE IN USA

Visit **clopaydoor.com** or call **1-800-2CLOPAY (225-6729)** for more information on Clopay, America's Favorite Garage Doors.

Follow us on

©2026 Clopay Corporation. All rights reserved.

RSDR-WCBRFL-12_REV0726

START DESIGNING YOUR NEW GARAGE DOOR

OPEN CAMERA AND POINT!